
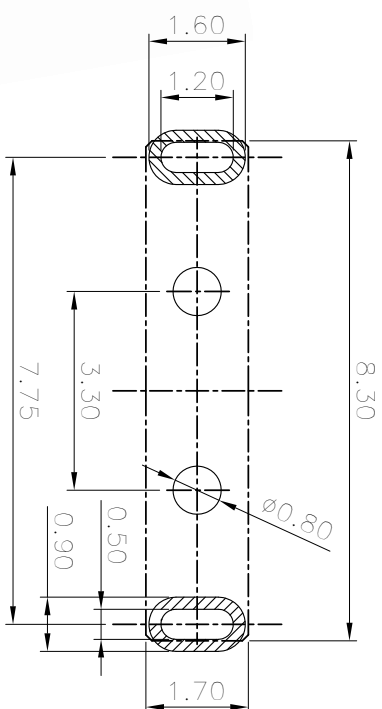
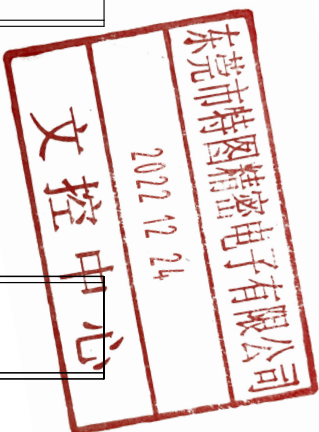


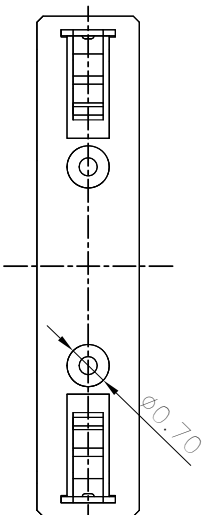

REV. ECN NO OR DESCRIPTION	REVISED	DATE
A PRODUCT RELEASE	BROKEN	2020.04.28
B MODIFY	BROKEN	2022.05.21
C MODIFY	BROKEN	2022.12.03

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS

- | | |
|---|------|
| 1-1. CONTACT RESISTANCE: 90 milliohms | MAX. |
| 1-2. INSULATION RESISTANCE: 1,000 Megohms | MIN |
| 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC | |
| FOR 1 MINUTE. | |
| 2. SALT SPRAY: 48H. | |
| 3. RoHS 2002/95/EC COMPLIANT. | |
| 4. PACKING NUMBER : 1400 PCS/REEL. | |

P/N	PLATING
1040202AR001	1u"
1040202BR001	3u"

B	CONTACT	2	SUS301	Gold (SEE TABLE) plated on contact area All over Nickel Plated .	
A	HOUSING	1	LCP E1301	CREAMY WHITE	
NO	DESCRIPTION	MATERIAL		PLATING & COLOR	
UNLESS OTHERWISE SPECIFIED TOLERANCES		 TITLE: 2PIN SPRING BATTERY插板, 5H			
DECIMALS:	ANGLES:	PART NO.		1040202XR001	
X :±0.5	X :±2°	DWV		BROKEN	
X.X :±0.3	X.X :±1°	CHKD			
X.XX :±0.2		APVD			
		SCALE 1:1		UNIT: mm	
		SIZE: A4		SHEET: 10/1	
					
					