
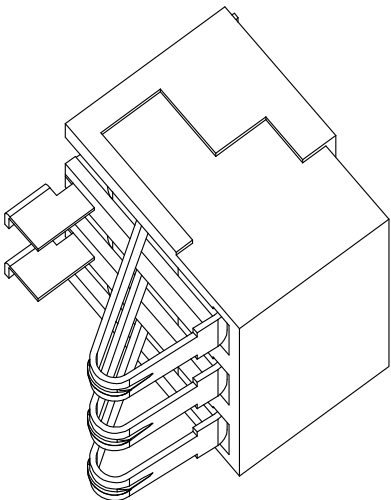


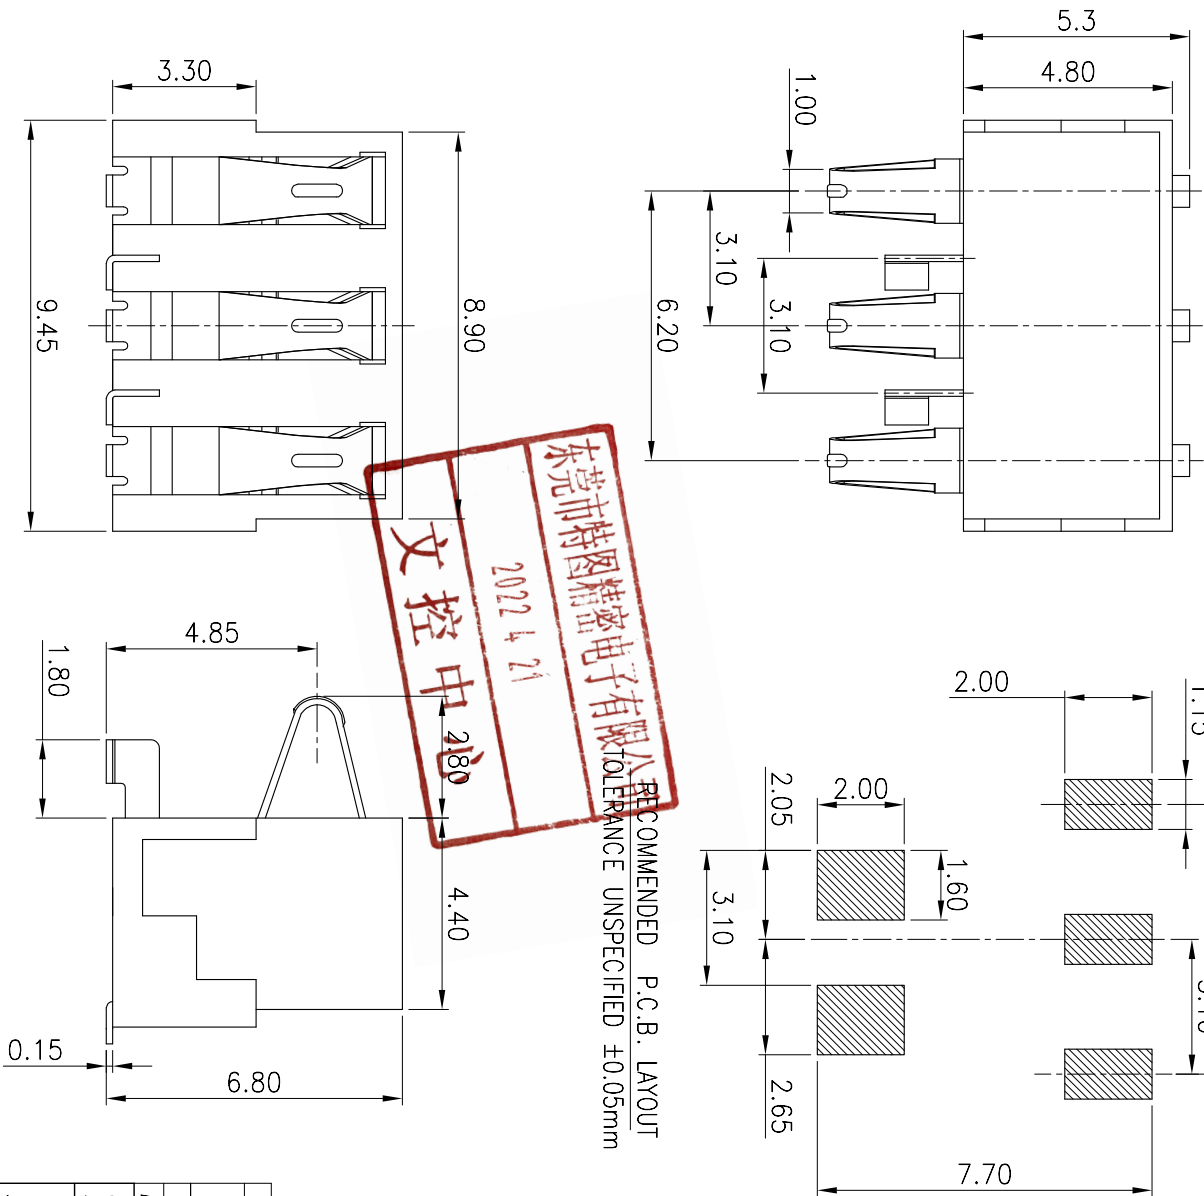

SPECIFICATION
1.CURRENT RATING:3A MAX.
2.DIELECTRIC WITHSTANDING VOLTAGE:350V AC R.M.S FOR ONE MINUTE.
3.INSULATION RESISTANCE:250MOHM/MIN AT 250V DC.
4.OPERATING TEMPERATURE:-40°C TO+85°C.
5.RoHS 2011/65/EU COMPLIANT.

C	FIXING	2	COPPER ALLOY 0.20t	All over Tin & Nickel Plated
B	CONTACT	3	COPPER ALLOY 0.15t	Gold Flash On Contact Area Tin plated on Solder tail All over Nickel Plated .
A	HOUSING	1	THERMOPLASTIC 0194-10	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:		ANGLES:		
X	±0.5	X	±2°	
X.X	±0.3	X.X	±1°	
X.XX	±0.2			
TITLE: 3.1 BATTERY 3P 6.8H				
PART NO.		1040303AR002		
DWN		JAMES		
CHKD		2012.03.29		
APVD				
SCALE 1:1		UNIT: mm		
CUSTOMER COPY		SIZE: A4 SHEET: 10F1 REV: A		

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	JAMES	2012.03.29