
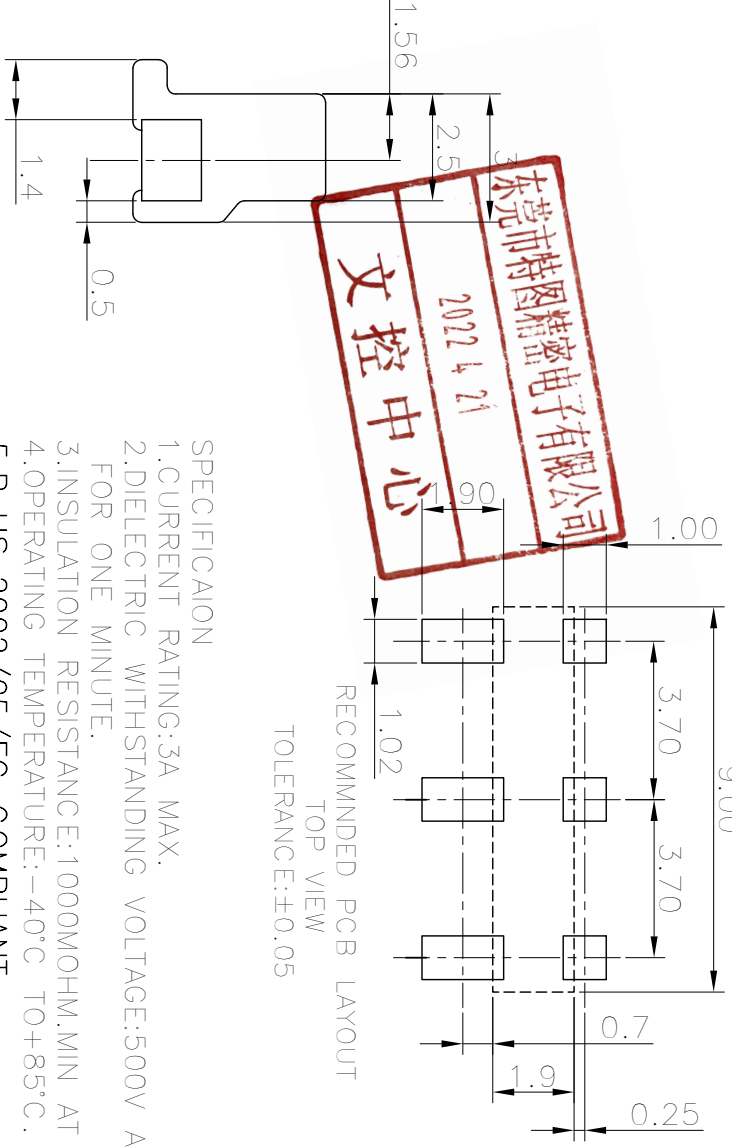
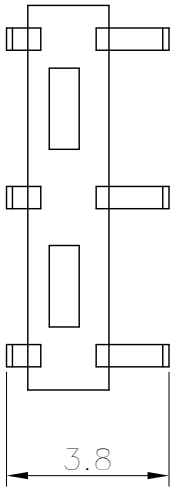
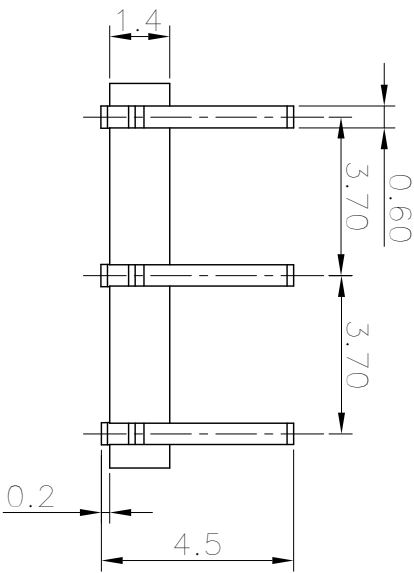


ROHS Compliant

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

TETULL

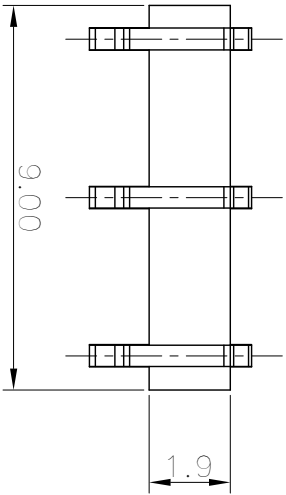

东莞市特图精密电子有限公司
2022 4 21
文控中心

RECOMMENDED PCB LAYOUT
TOP VIEW
TOLERANCE: ±0.05

- SPECIFICATION
- 1. CURRENT RATING: 3A MAX.
 - 2. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC R.M.S FOR ONE MINUTE.
 - 3. INSULATION RESISTANCE: 1000MΩ·MIN AT 250V DC.
 - 4. OPERATING TEMPERATURE: -40°C TO +85°C.
 - 5. RoHS 2002/95/EC COMPLIANT.

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	ARES	2018.05.14
B	MODIFY	BROKEN	2020.05.05

2	TERMINAL	3	COPPER ALLOY	AU PLATING	GOLD PLATING ALL OVER
1	HOUSING	1	THERMOPLASTIC		UL 94V-0
ITEM	NAME	Q'TY	MATERIAL	FINISHED	NOTE
UNLESS OTHERWISE SPECIFIED TOLERANCES					
DECIMALS:		ANGLES:		TITLE: 3.7 BATTERY 3P 4.5H(立式)	
X : ±0.5		X : ±2°		PART NO.	10A0333ARD01
X.X : ±0.3		X.X : ±1°		DWN	BROKEN
X.XX : ±0.2				CHKD	2020.05.05
				APVD	
				SCALE 1:1	UNIT: mm
				SIZE: A4	SHEET: 10F1
				REV: B	



CUSTOMER COPY

TETULL CORPORATION