
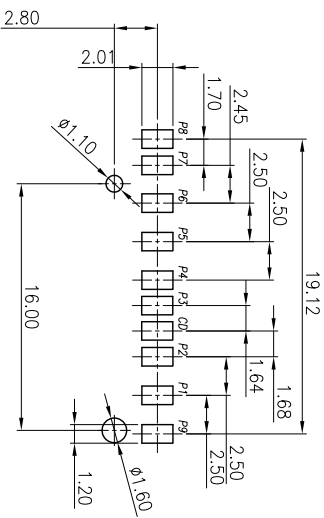
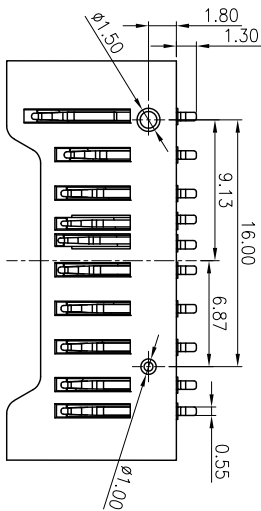
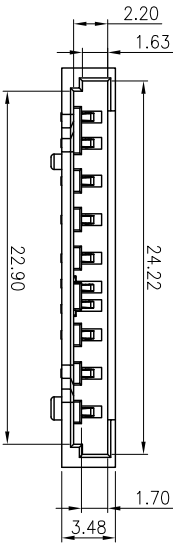
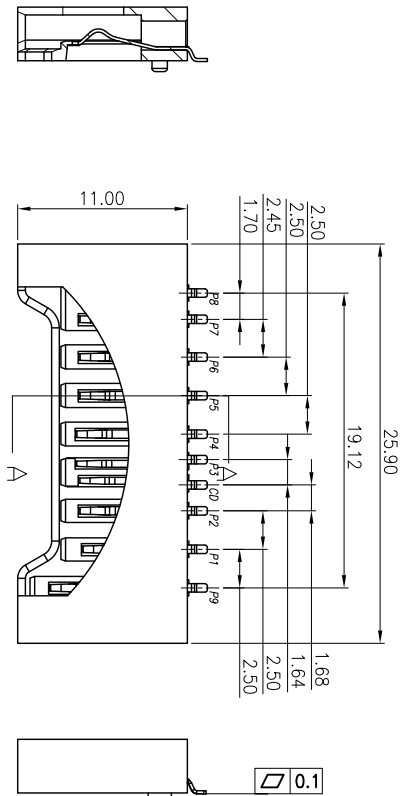


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

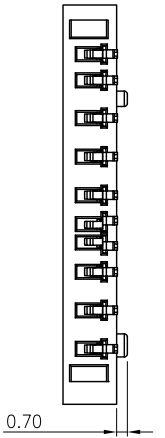

Pin#	Name	Type	Description
1	CD/DAT3	I/O/PP	Card Detect/ Data Line[Bit3]
2	CMD	PP	Command/Response
3	Vss1	S	Supply voltage ground
4	VDD	S	Supply voltage
5	CLK	I	Clock
6	Vss2	S	Supply voltage ground
7	DAT0	I/O/PP	Date Line [Bit0]
8	DAT1	I/O/PP	Date Line [Bit1]
9	DAT2	I/O/PP	Date Line [Bit2]
10	CD		CARD DETECT
11	WP		WRITE PROTECT

REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A		PRODUCT RELEASE	BROKEN	2015.05.14

NOTE:

- ELECTRICAL CHARACTERISTICS
 - VOLTAGE RATING: 5V MAX
 - CURRENT RATING: 0.5A MAX
 - CONTACT RESISTANCE: 100 milliohms MAX.
 - INSULATION RESISTANCE: 1000 Megohms MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
- MECHANICAL CHARACTERISTICS
 - MATING FORCE: 30N MAX.
 - UNMATING FORCE: 2N MIN.
 - DURIBILITY: 5000 CYCLES
 - OPERATING TEMPERATURE: -40°C~85°C
 - ROHS 2002/95/EC COMPLIANT.
 - MPQ : 100PCS/TRAY.

P/N	HOUSING COLOR
1081105AT001	BLACK
1081105AT003	WHITE

B	CONTACT	16	COPPER ALLOY 0.12t	Gold Flash On Contact Area Tin plated on Solder tail All over Nickel Plated.
A	HOUSING	1	THERMOPLASTIC U94-V0	BLACK&WHITE
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X : ±0.5	X : ±2°
X.X : ±0.3	X.X : ±1'
X.XX : ±0.2	



TITLE:	SD CARD CONN
PART NO.	1081105AT00X
DWN	BROKEN
CHKD	2015.05.14
APVD	
SCALE 1:1	UNIT: mm
CUSTOMER COPY	SIZE: A4 SHEET: 10F1 REV: A