

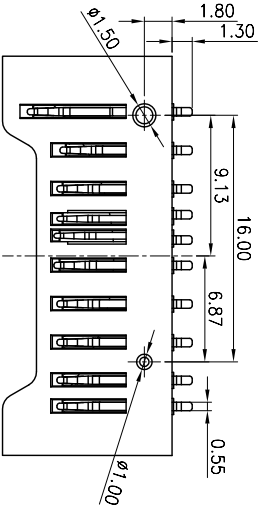
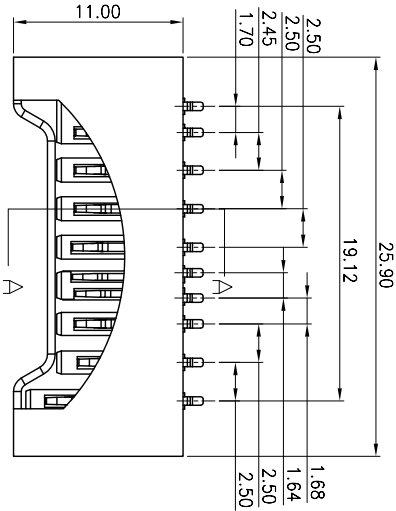
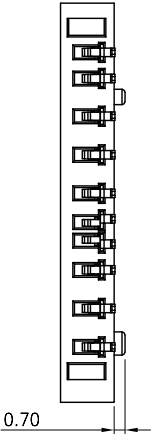


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

ROHS Compliant

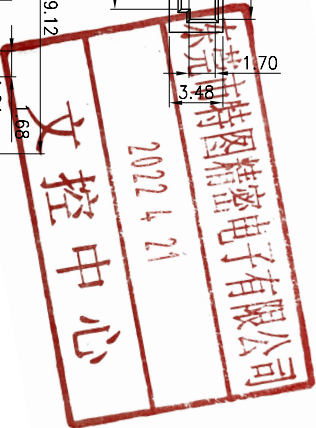

SECTION A-A

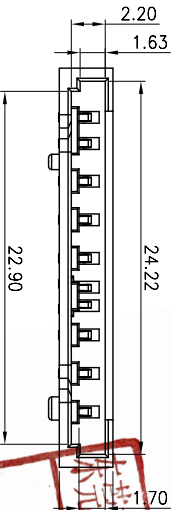

RECOMMENDED P.C.B LAYOUT
(General tolerance ± 0.05)

REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	BROKEN	2015.05.14	

SPECIFICATIONS:
1MECHANICAL:
DURABILITY: 5000 CYCLES
ELECTRICAL:
CURRENT RATING: 0.5A
WITHSTANDING VOLTAGE: 500V AC R.M.S.
CONTACT RESISTANCE: 100m MAX.
INSULATION RESISTANCE: 1000M MIN.
3ENVIRONMENTAL
TEMPERATURE RANGE -40°C ~ +85°C

P/N	HOUSING COLOR
1081105AT001	BLACK
1081105AT003	WHITE

B	CONTACT	16	COPPER ALLOY 0.12t	Gold Flash On Contact Area Tin plated on Solder tail All over Nickel Plated
A	HOUSING	1	THERMOPLASTIC UL94-V0	BLACK&WHITE
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:		ANGLES:		
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
				
TITLE: SD CARD CONN 全塑短体正向型				
PART NO.		1081105A100X		
DWN		BROKEN 2015.05.14		
CHKD				
APVD				
SCALE 1:1		UNIT: mm		
CUSTOMER COPY		SIZE: A4 SHEET: 10/11 REV: A		