


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

ROHS Compliant

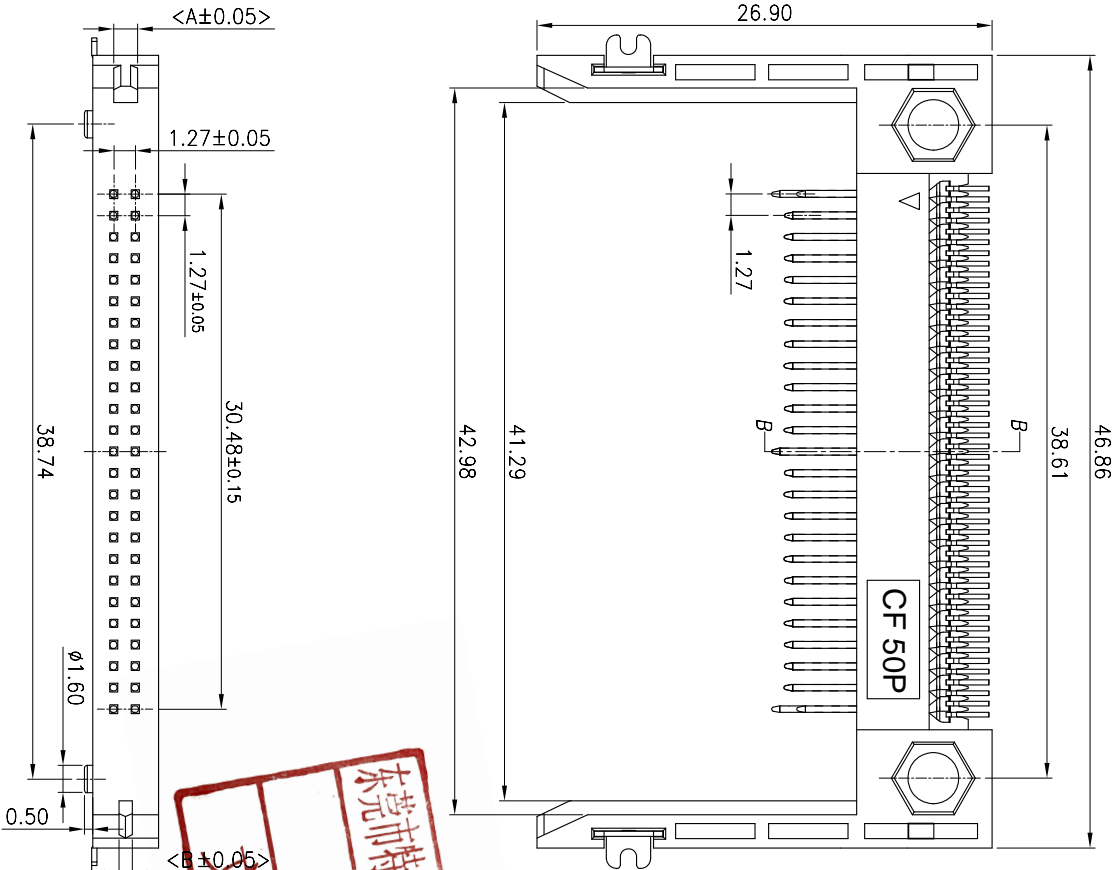


P/N	NOTES	DIM.A	DIM.B
1085001AR001	CF CARD 50P板上臂长26.9	1.35	0.70
1085001AR002	CF CARD 50P板下臂长26.9	0.70	1.35

C	FIXING	2	BRASS	Tin plated on Solder tail
B	CONTACT	50	BRASS	Solid Finish on Contact Area
A	HOUSING	1	LCP	Matte-Tin plated on Solder tail
NO	DESCRIPTION	QTY	MATERIAL	WHITE
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			

- SPECIFICATIONS:
1. Current Rating: 0.5A AC/DC
 2. Contact Resistance: 40m Ω max
 3. Insulation Resistance: 1000M Ω /min/175°C
 4. Withstanding Voltage: 500V
 5. TEMPERATURE RANGE: -40°C ~ +85°C
 6. MPQ: 50PCS/TRAY
 7. ROHS: 2011/65/EU COMPLIANT

RECOMMENDED P.C.B LAYOUT
(General tolerance ±0.05)

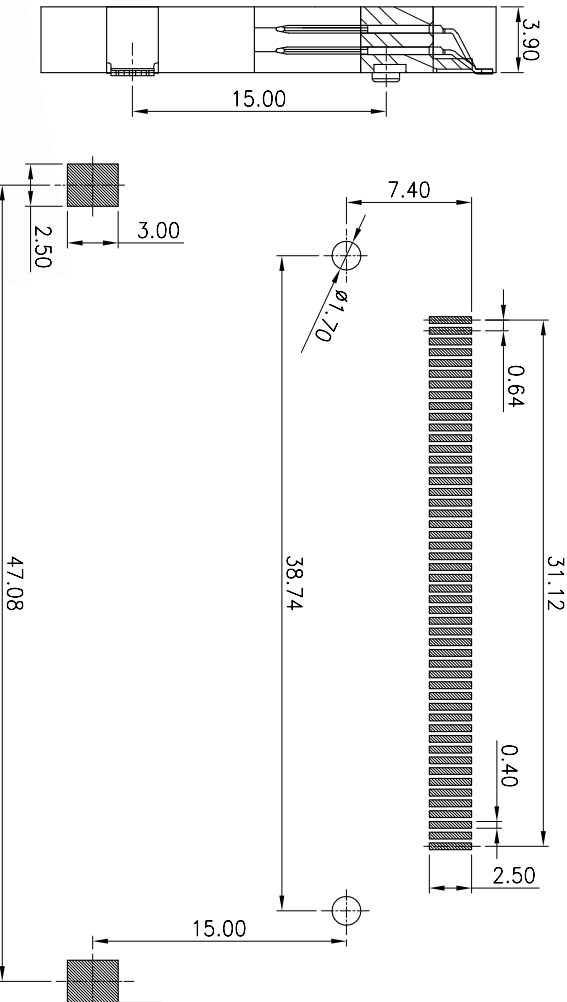

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	TOM	2012.03.23
B	定位柱高度0.8改成0.5	CRL	2024.05.22