



NOTE:

1. ELECTRICAL CHARACTERISTICS
 - 1-1. VOLTAGE RATING: 10V DC.
 - 1-2. CURRENT RATING: 0.5 A.
 - 1-3. CONTACT RESISTANCE: 50 milliohms MAX.
 - 1-4. INSULATION RESISTANCE: 1000 Megohms MIN.
 - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
2. MECHANICAL CHARACTERISTICS
 - 2-1. CONTACT NORMAL FORCE:0.3~0.9N CONTACT.
 - 2-2. DURABILITY:5000 CYCLES.
 3. SALT SPRAY: 24H.
 4. OPERATING TEMPERATURE:-40℃~85℃.
 5. RoHS 2002/95/EC COMPLANT.
 6. MPQ : 1200PCS/REEL

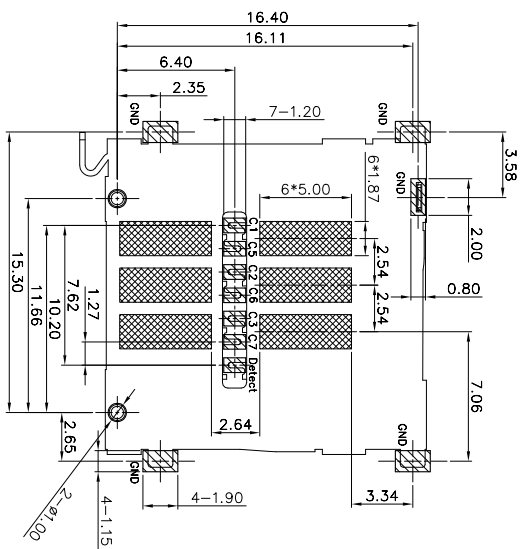

 Solder Area
 Keep Out Area
RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05



SPECIFIED TOLERANCES

DECIMALS:	ANGLES:		PART NO.	1050623AR001
X : ± 0.5	X : $\pm 2^\circ$		DWN	BROKEN
X X : ± 0.3	X X : $\pm 1^\circ$		CHKD	
X X X : ± 0.2			APVD	
			UNIT:	mm
		SCALE 1 : 1	 	



CUSTOMER COPY

CUSTOMER COPY

DATE	2022.03.13
STATUS	BROKEN
DESCRIPTION	
CHKD	
APVD	
SCALE 1:1	UNIT: mm
SIZE: A4	SHEET: 10F1
REV: A	