


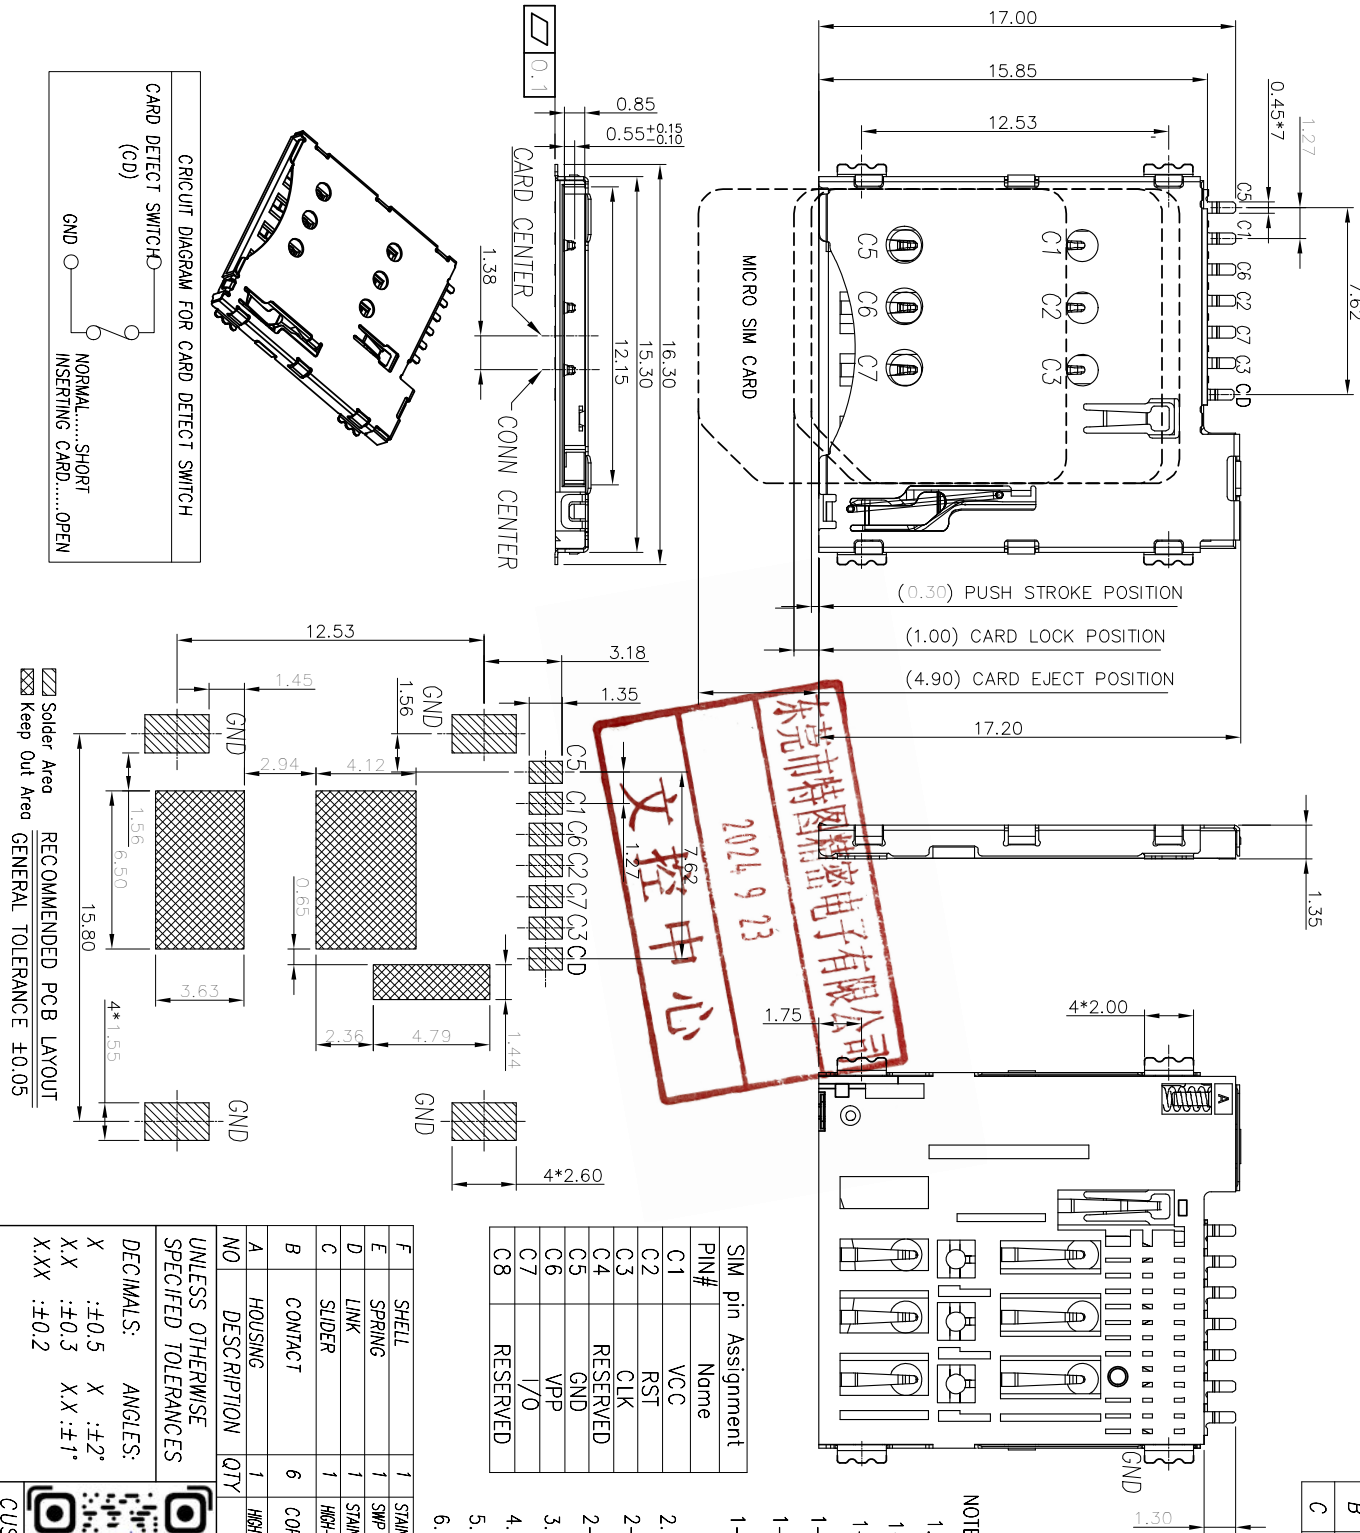

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
B	MODIFY	BROKEN	2016.11.29
C	外壳焊脚V型改成W型	CRAL	2024.9.10

NOTE:

- ELECTRICAL CHARACTERISTICS
- 1-1. VOLTAGE RATING: 10V DC.
- 1-2. CURRENT RATING: 0.5 A.
- 1-3. CONTACT RESISTANCE: 50 milliohms MAX.
- 1-4. INSULATION RESISTANCE: 1000 Megohms MIN.
- 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
2. MECHANICAL CHARACTERISTICS
- 2-1. CONTACT NORMAL FORCE: 0.3~0.9N CONTACT.
- 2-2. DURABILITY: 5000 CYCLES.
3. SALT SPRAY: 24H.
4. OPERATING TEMPERATURE: -40C~85C.
5. ROHS 2011/65/EU COMPLIANT.
6. MPQ : 1000PCS/REEL.

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	

CUSTOMER COPY

SIZE: A4

SHEET: 10F1

REV: c