
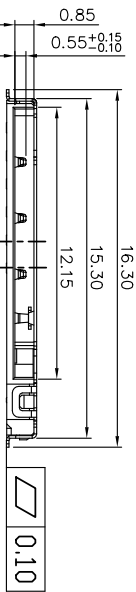

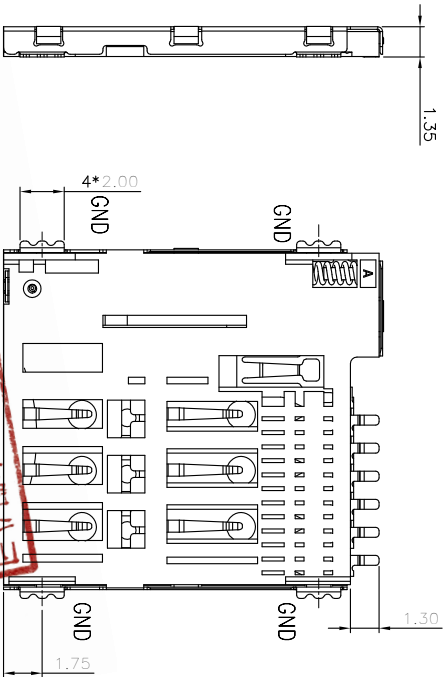


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

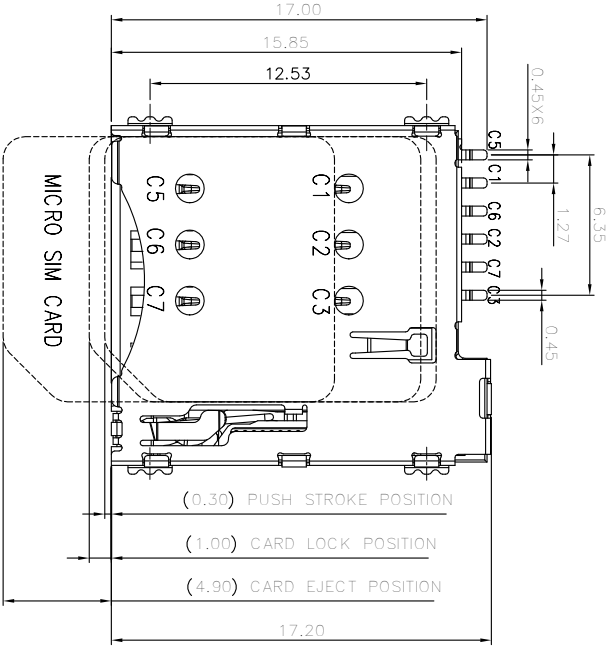

NOTE:

1. ELECTRICAL CHARACTERISTICS

1-1. VOLTAGE RATING: 10V DC.

1-2. CURRENT RATING: 0.5 A.

1-3. CONTACT RESISTANCE: 50 milliohms MAX.

1-4. INSULATION RESISTANCE: 1000 Megohms MIN.

1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC

FOR 1 MINUTE.

2. MECHANICAL CHARACTERISTICS

2-1. CONTACT NORMAL FORCE: 0.3~0.9N CONTACT.

2-2. DURABILITY: 5000 CYCLES.

3. SALT SPRAY: 24H.



4. OPERATING TEMPERATURE: -40°C~85°C.

5. RoHS 2002/95/EC COMPLIANT.

6. MOQ : 1000PCS/REEL.

东莞市特图精密电子有限公司
2022 4 21
文控中心

SIM pin Assignment	Pin#	Name
C1	1	VCC
C2	2	RST
C3	3	CLK
C4	4	RESERVED
C5	5	GND
C6	6	VPP
C7	7	I/O
C8	8	RESERVED

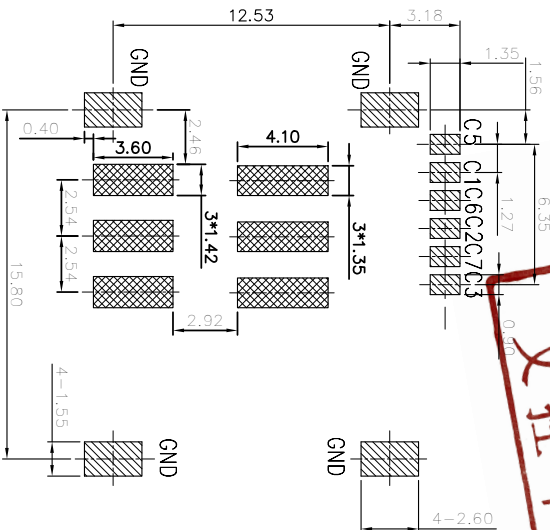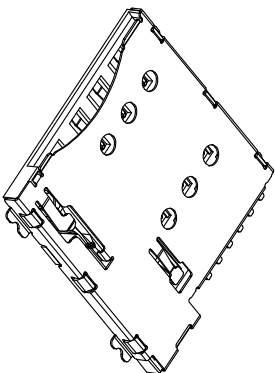

Keep Out Area

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	TOM	2015.03.23
B	MODIFY	BROKEN	2016.02.11

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
F	SHELL	1	STAINLESS STEEL	Ni/Au PLATING
E	SPRING	1	SMP	---
D	LINK	1	STAINLESS STEEL	---
C	SLIDER	1	HIGH-TEMPERATURE PLASTIC U94-W0	BLACK
B	CONTACT	6	COPPER ALLOY	Gold plated on contact area Tin plated on Solder tail All over: Nickel Plated.
A	HOUSING	1	HIGH-TEMPERATURE PLASTIC U94-W0	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES	DECIMALS:	ANGLES:
	X :±0.5	X :±2°
	X.X :±0.3	X.X :±1°
	X.XX :±0.2	



CUSTOMER COPY

TITLE:	TYPE
MICRO SIM CARD 6P SMT P-P	1.35H

PART NO.	DWN	BROKEN	2016.02.11
1050615AR003			

CHND	APVD	UNIT:	mm

SCALE	1:1	UNIT:	mm

SIZE:	A4	SHEET:	10F1

REV:	B