



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

ROHS Compliant

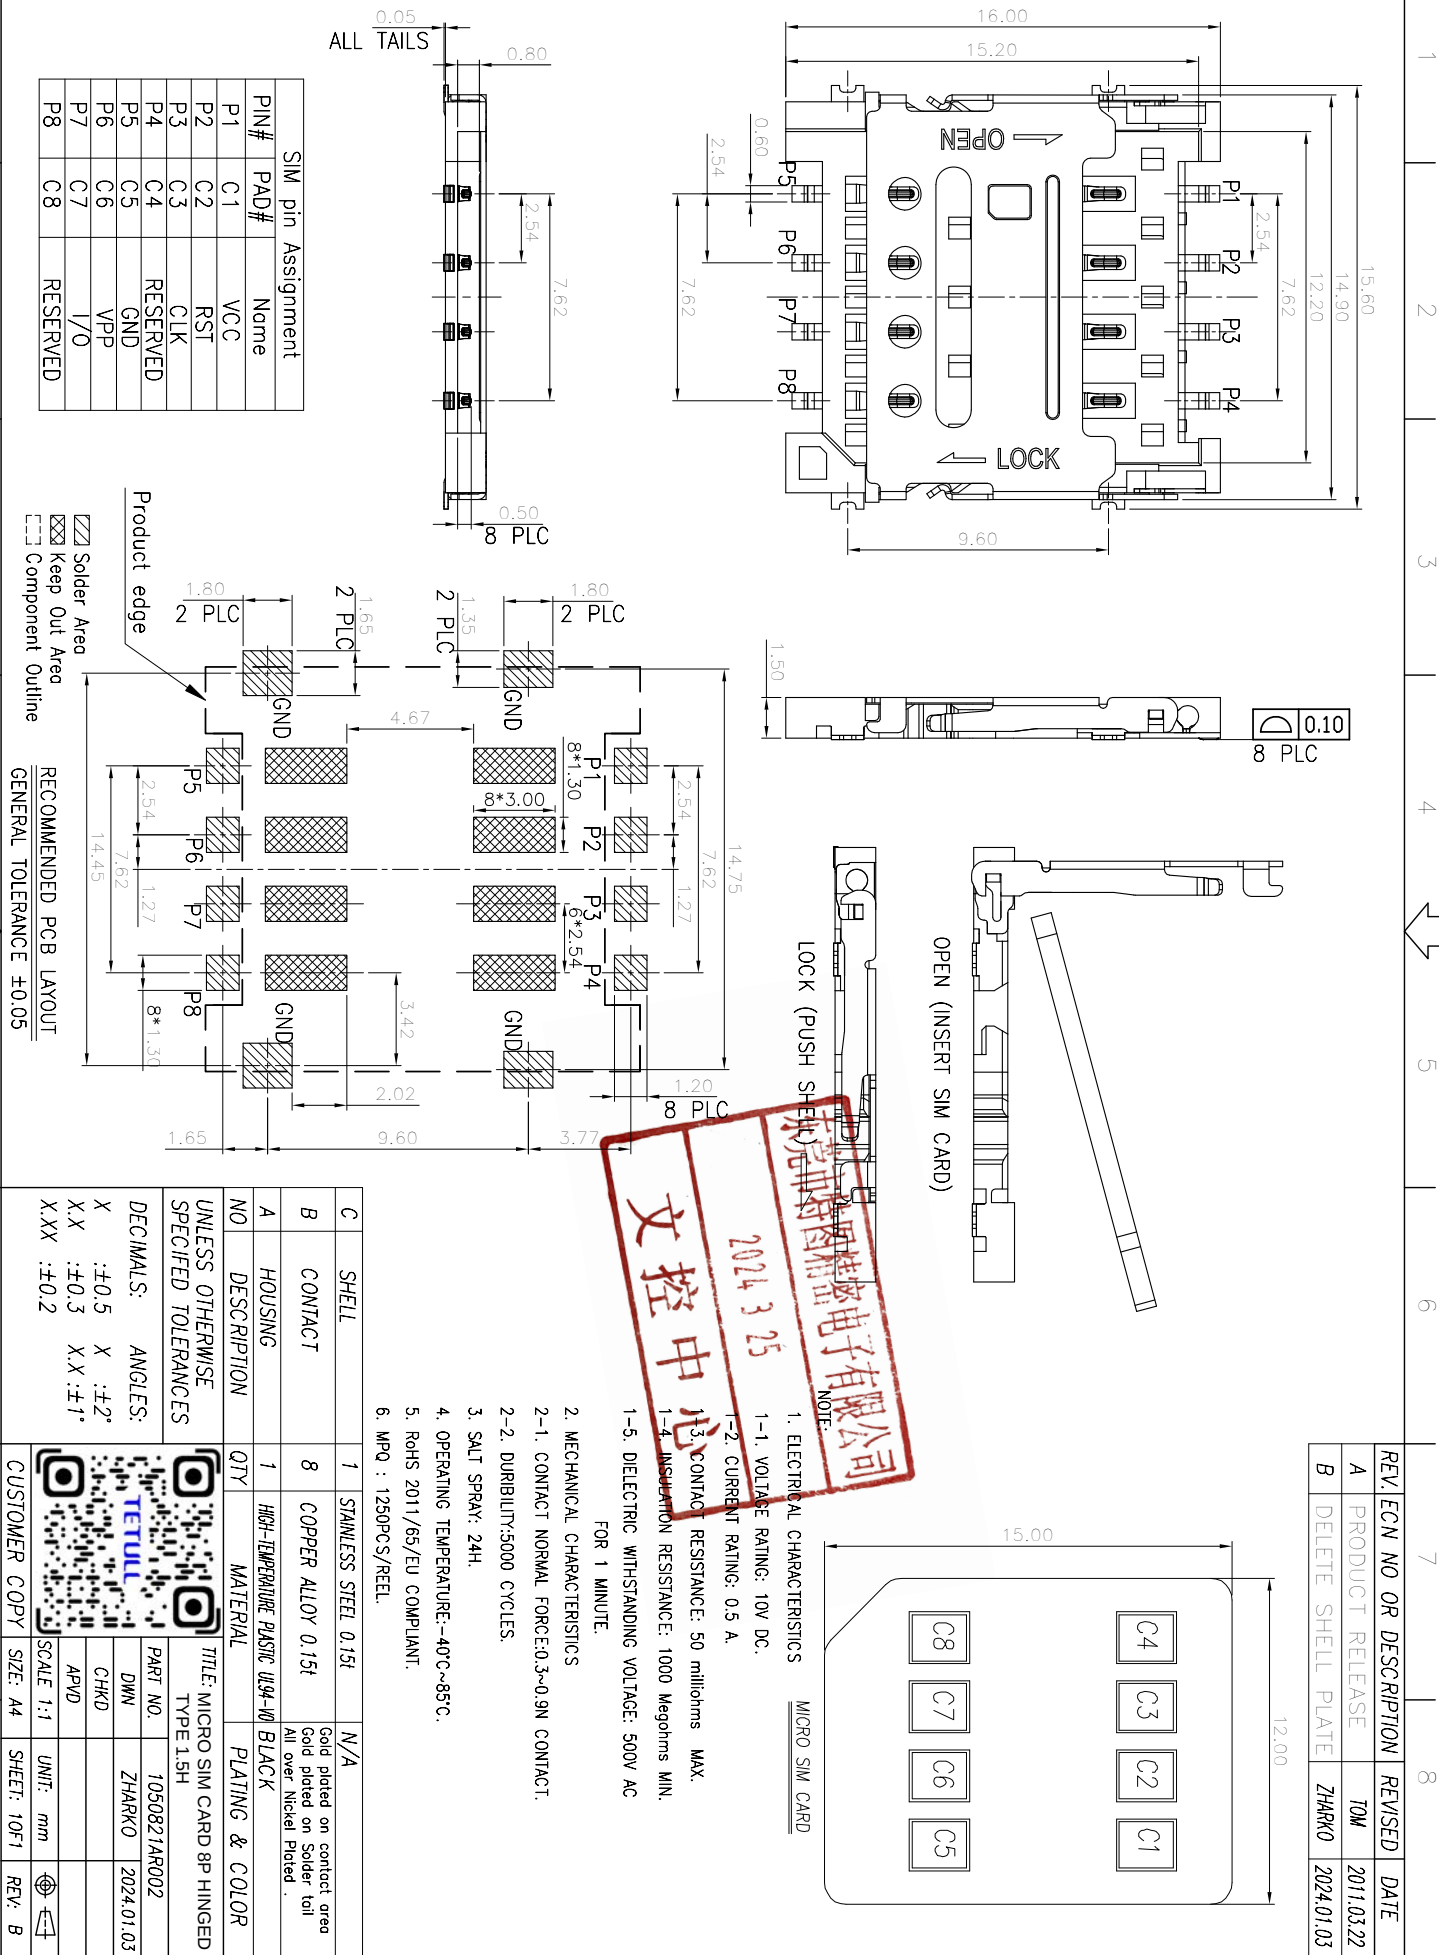

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	TOM	2011.03.22
B	DELETE SHELL PLATE	ZHARKO	2024.01.03

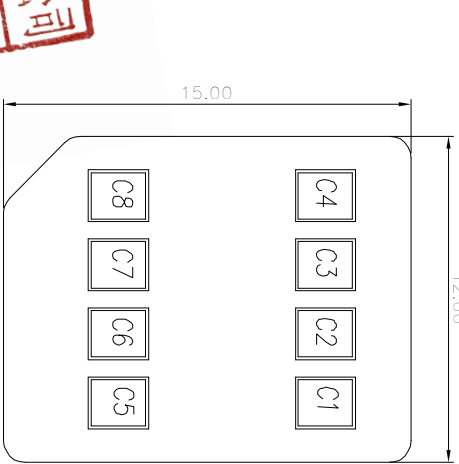

2024 3 25

文控中心

深圳市特图精密电子有限公司

- NOTE:
1. ELECTRICAL CHARACTERISTICS
 - 1-1. VOLTAGE RATING: 10V DC.
 - 1-2. CURRENT RATING: 0.5 A.
 - 1-3. CONTACT RESISTANCE: 50 milliohms MAX.
 - 1-4. INSULATION RESISTANCE: 1000 Megohms MIN.
 - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
 2. MECHANICAL CHARACTERISTICS
 - 2-1. CONTACT NORMAL FORCE:0.3~0.9N CONTACT.
 - 2-2. DURABILITY:5000 CYCLES.
 3. SALT SPRAY: 24H.
 4. OPERATING TEMPERATURE:-40°C~85°C.
 5. RoHS 2011/65/EU COMPLIANT.
 6. MPQ : 1250PCS/REEL.

C	SHELL	1	STAINLESS STEEL 0.15t	N/A
B	CONTACT	8	COPPER ALLOY 0.15t	Gold plated on contact area Gold plated on Solder tail All over Nickel Plated .
A	HOUSING	1	HIGH-TEMPERATURE PLASTIC UL94-V0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:		ANGLES:		
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
  TEUL				
CUSTOMER COPY				
TITLE: MICRO SIM CARD 8P HINGED TYPE 1.5H		1050821AR002		
PART NO.		ZHARKO 2024.01.03		
DWN				
CHKD				
APVD				
SCALE 1:1		UNIT: mm		
SIZE: A4		SHEET: 10F1		REV: B