




THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

ROHS Compliant

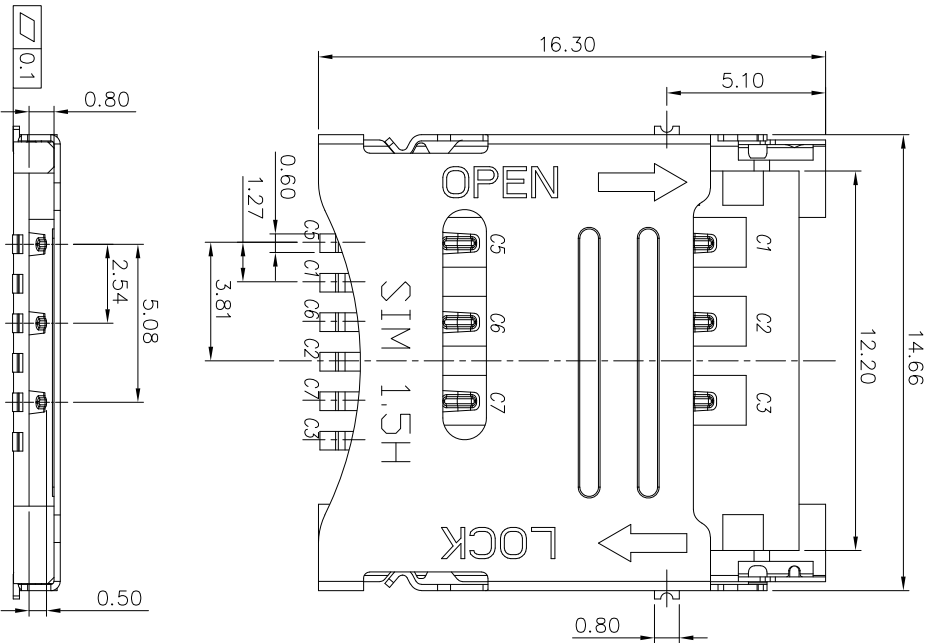

NOTE:

1. ELECTRICAL CHARACTERISTICS
 - 1-1. VOLTAGE RATING: 10V DC.
 - 1-2. CURRENT RATING: 0.5 A.
 - 1-3. CONTACT RESISTANCE: 50 milliohms MAX.
 - 1-4. INSULATION RESISTANCE: 1000 Megohms MIN.
 - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
2. MECHANICAL CHARACTERISTICS
 - 2-1. CONTACT NORMAL FORCE: 0.3~0.9N CONTACT.
 - 2-2. DURABILITY: 5000 CYCLES.
 3. SALT SPRAY: 24H.
 4. OPERATING TEMPERATURE: -40C~85C.
 5. RoHS 2011 /65/EU COMPLIANT.
 6. MPQ : 1200PCS/REEL.

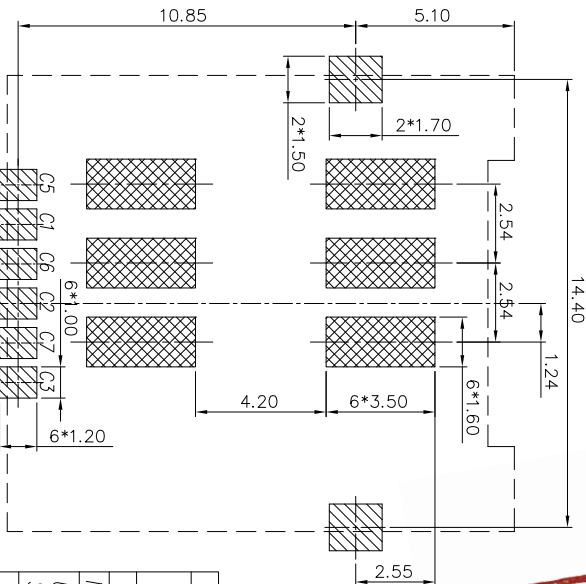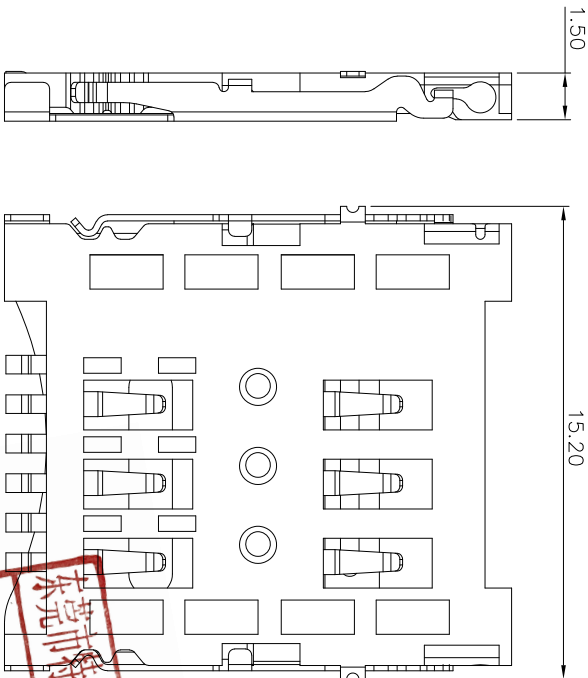


RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

Keep Out Area
Component Outline




东莞市新图精密电子有限公司
2024.9.23
文控中心

SIM pin Assignment	
PIN#	Name
C1	VCC
C2	RST
C3	CLK
C4	RESERVED
C5	GND
C6	VPP
C7	I/O
C8	RESERVED

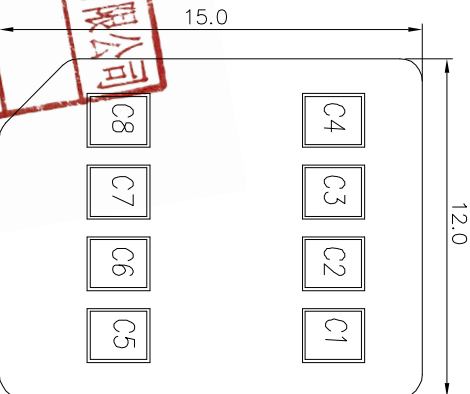MICRO SIM CARD



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
B	DELETE SHELL PLATE	ZHARKO	2024.01.03
C	根据实物修改外观	ZHARKO	2024.04.13

C	SHELL	1	STAINLESS STEEL 0.15t	N/A
B	CONTACT	6	COPPER ALLOY 0.15t	Gold plated on contact area Tin plated on Solder tail All over Nickel Plated .
A	HOUSING	1	HIGH-TEMPERATURE PLASTIC UL94-V0 BLACK	
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:		ANGLES:		
X : ±0.5		X : ±2°		
X.X : ±0.3		X.X : ±1°		
X.XX : ±0.2				
<div><div></div><div><p>PART NO. 1050621AR006</p><p>DWN ZHARKO 2024.04.13</p><p>CHKD</p><p>APVD</p><p>SCALE 1:1</p><p>UNIT: mm</p></div></div>				
CUSTOMER COPY				
SIZE: A4		SHEET: 10/1		REV: C



A

B

C

D

E

F

1

2

3

4

5

6

7

8