

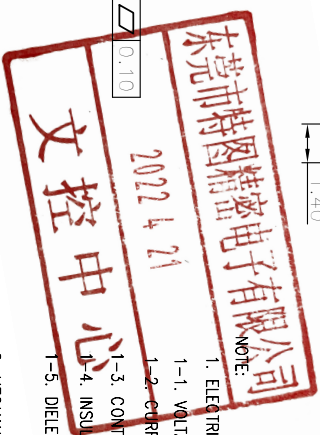
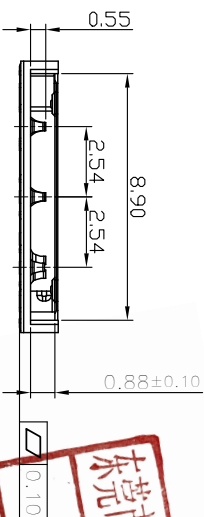
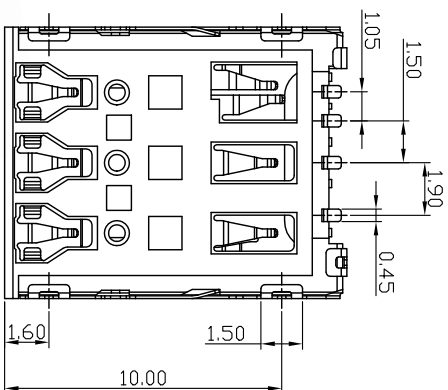
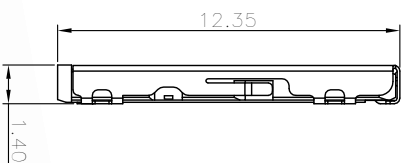


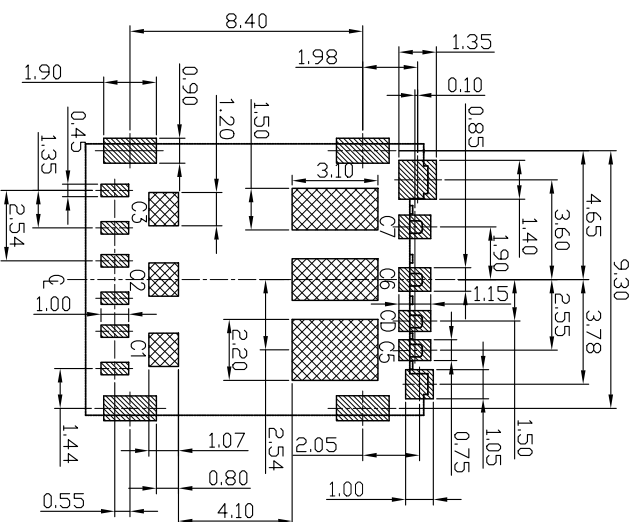


1. ELECTRICAL CHARACTERISTICS
 - 1-1. VOLTAGE RATING: 12V DC.
 - 1-2. CURRENT RATING: 1.0 A.
 - 1-3. CONTACT RESISTANCE: 60 milliohms MAX.
 - 1-4. INSULATION RESISTANCE: 1000 Megohms MIN.
 - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
- FOR 1 MINUTE.
2. MECHANICAL CHARACTERISTICS
 - 2-1. CONTACT NORMAL FORCE: 0.3~0.9N CONTACT
 - 2-2. DURABILITY: 5000 CYCLES.
 3. SALT SPRAY: 24H.
 4. OPERATING TEMPERATURE: -40°C~85°C.
 5. RoHS 2002/95/EC COMPLIANT.
 6. MPQ : 2000PCS/REEL



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	JAMES	2017.03.22
B	MODIFY	BROKEN	2018.01.11

SIM CARD	
Pin No.	NAME
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O
CD	Switch Pin

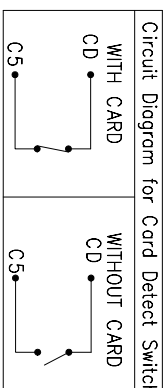

C	SHELL	1	STAINLESS STEEL	Ni: PLATING
B	CONTACT	6	COPPER ALLOY	Gold plated on contact area and Solder toll All over Nickel Plated .
A	HOUSING	1	HIGH-TEMPERATURE PLASTIC UL94-V0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:	ANGLES:	TITLE:		
X :±0.5	X :±2°	NANO SIM CARD 6+1P 直插式		
X.X :±0.3	X.X :±1°	PART NO.	1050628AR005	
X.XX :±0.2		DWN	BROKEN	
		CHKD	2018.01.11	
		APVD		
		SCALE 1:1	UNIT: mm	
CUSTOMER COPY		SIZE: A4	SHEET: 10 of 1	REV: B

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

 Solder Area
 Keep Out Area
 Component Outline

•TETUll•