
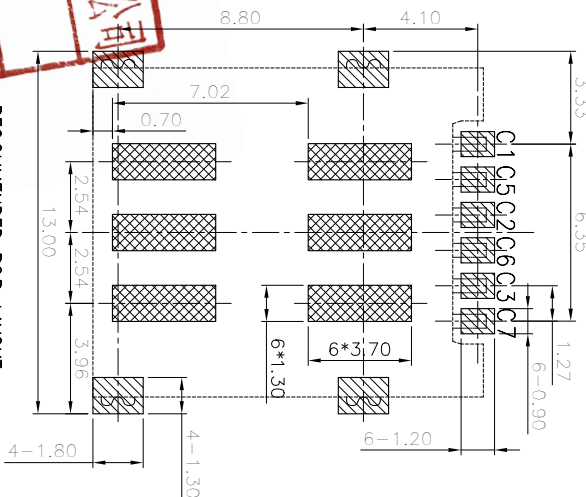




1. ELECTRICAL CHARACTERISTICS
 - 1-1. VOLTAGE RATING: 12V DC.
 - 1-2. CURRENT RATING: 1.0 A.
 - 1-3. CONTACT RESISTANCE: 60 milliohms MAX.
 - 1-4. INSULATION RESISTANCE: 1000 Megohms MIN.
 - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
FOR 1 MINUTE.

-  Solder Area
-  Keep Out Area
-  Component Outline

SIM pin Assignment	
PIN#	Nome
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O

12.30



STEP 2 PUSH THE SHELL

Diagram showing the final assembly, labeled "STEP 3 FINISH". The assembly is shown in a side profile view, highlighting the completed structure with the top cover and internal components.

C	SHELL	1	STAINLESS STEEL, 0.15t	N/A
B	CONTACT	6	C5191 0.15t	Gold plated on contact area Gold plated on Solder tail All over Nickel Plated .
A	HOUSING	1	HIGH-TEMPERATURE PLASTIC UL94-V0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
		TITLE: NANO SIM CARD 6P 1.5H		HINGED TYPE

TITLE:	NANO SIM CARD 6P 1.5H HINGED TYPE
---------------	--------------------------------------

PART NO.	1050626AR101
----------	--------------

DWN	BROKEN	2015.05.18
-----	--------	------------

CHKD		
------	--	--

APVD		
------	--	--

SCALE 1:1	UNIT: mm	
-----------	----------	---

Customer Copy

SIZE: A4	SHEET: 10F1	REV: A
----------	-------------	--------

EV: