

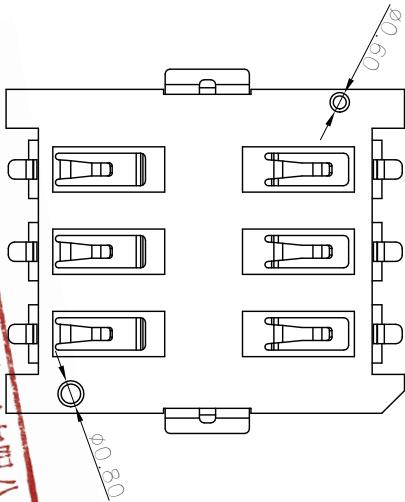
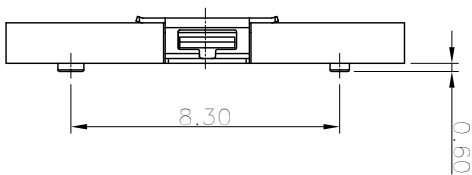
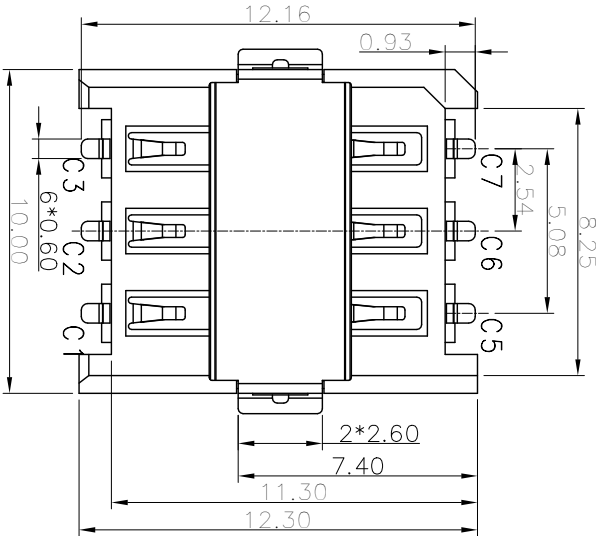




THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

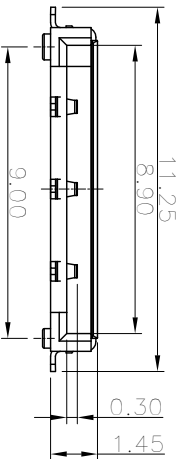


SIM pin Assignment	PIN#	Nome
C1	VCC	VCC
C2	RST	RST
C3	CLK	CLK
C5	GND	GND
C6	VPP	VPP
C7	I/O	I/O



Legend:
[Hatched] Solder Area
[Cross-hatched] Keep Out Area
[Dashed] Component Outline
RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

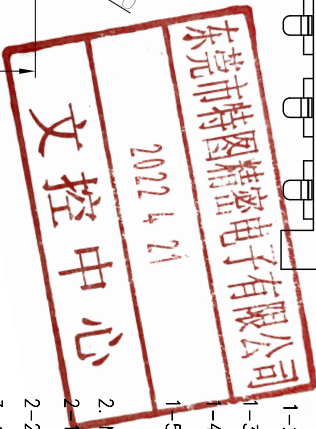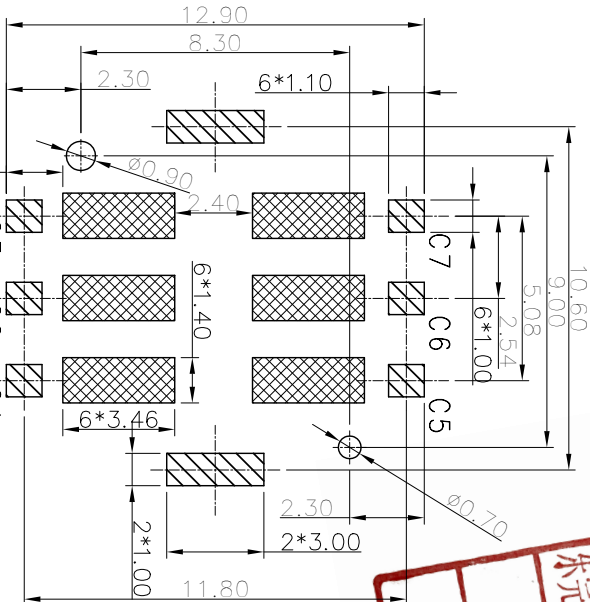


NOTE: NANO SIM CARD

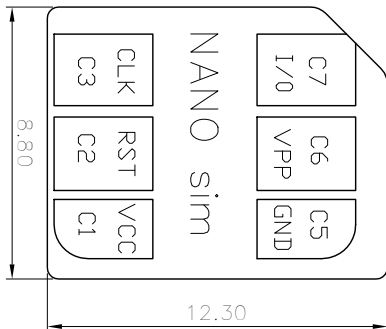

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	BROKEN	2016.04.26

- ELECTRICAL CHARACTERISTICS
- 1-1. VOLTAGE RATING: 12V DC.
- 1-2. CURRENT RATING: 1.0 A.
- 1-3. CONTACT RESISTANCE: 60 milliohms MAX.
- 1-4. INSULATION RESISTANCE: 1000 Megohms MIN.
- 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
2. MECHANICAL CHARACTERISTICS
- 2-1. CONTACT NORMAL FORCE: 0.3~0.9N CONTACT.
- 2-2. DURABILITY: 5000 CYCLES.
3. SALT SPRAY: 24H.
4. OPERATING TEMPERATURE: -40C~85C.
5. ROHS 2002/95/EC COMPLIANT.
6. MPQ : 1500PCS/REEL.

C	SHELL	1	SUS304	G/F plated on Solder tail 30" Ni Underplated.										
B	CONTACT	6	C5191	30" Au plated on contact area G/F plated on Solder tail 30" Ni Underplated.										
A	HOUSING	1	LCP UL94-V0	BLACK										
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR										
UNLESS OTHERWISE SPECIFIED TOLERANCES														
DECIMALS:	ANGLES:													
X : ±0.5	X : ±2°													
X.X : ±0.3	X.X : ±1°													
X.XX : ±0.2														
 TITLE: NANO SIM CARD 6P 1.45H 直插式 <table><tr><td>PART NO.</td><td>1050628BR003</td></tr><tr><td>DWN</td><td>BROKEN</td></tr><tr><td>CHND</td><td></td></tr><tr><td>APVD</td><td></td></tr><tr><td>SCALE 1:1</td><td>UNIT: mm</td></tr></table>					PART NO.	1050628BR003	DWN	BROKEN	CHND		APVD		SCALE 1:1	UNIT: mm
PART NO.	1050628BR003													
DWN	BROKEN													
CHND														
APVD														
SCALE 1:1	UNIT: mm													
CUSTOMER COPY	SIZE: A4	SHEET: 10F1	REV: A											