
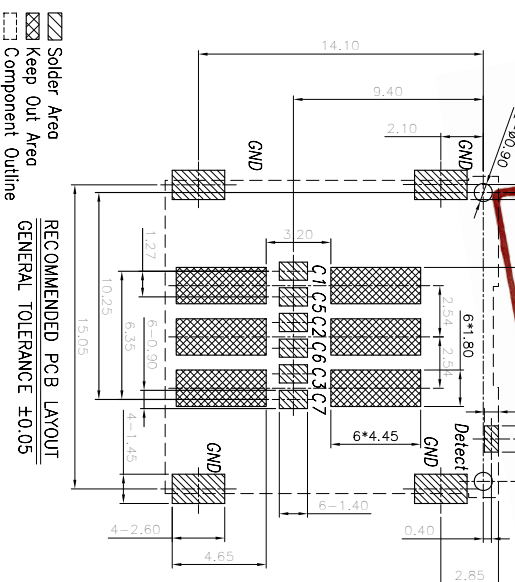



1. ELECTRICAL CHARACTERISTICS

- 1-1. VOLTAGE RATING: 12V DC.
 - 1-2. CURRENT RATING: 1.0 A.
 - 1-3. CONTACT RESISTANCE: 60 milliohms MAX.
 - 1-4. INSULATION RESISTANCE: 1000 Megohms MIN.
 - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
- FOR 1 MINUTE.
- 2. MECHANICAL CHARACTERISTICS
 - 2-1. CONTACT NORMAL FORCE:0.3~0.9N CONTACT
 - 2-2. DURABILITY:5000 CYCLES.
 - 3. SALT SPRAY: 24H.
 - 4. OPERATING TEMPERATURE:-40°C~+85°C.
 - 5. RoHS 2002/95/EC COMPLIANT.
 - 6. MPQ : 1000PCS/REEL

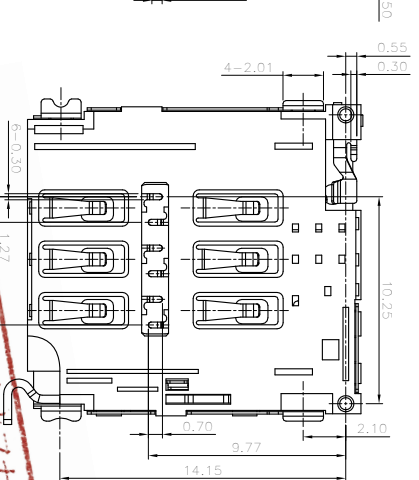

Technical drawing of the Regular type (P/N: 1050808AR014) showing front, side, and detail views with dimensions.

Regular type
P/N: 1050808AR014

Customized type (Other shapes or Other finish)

Dimensions:

- Overall width: 18.55
- Inner width: 17.95
- Overall height: 11.65
- Inner height: 15.55
- Top flange thickness: 7.55
- Bottom flange thickness: 2.16
- Radius: R1.13 (REF.)
- Length: 15.65 ± 0.03
- End flange thickness: 2.26 ± 0.03
- End flange thickness (alternative): 0.87

E	CAM	1	SUS													
D	LEVER	1	SUS													
C	SHELL	1	SUS 304	G/F plated on Solder toll 30u" MIN Ni underplated.												
B	CONTACT	7	C5191	G/F plated on contact area G/F plated on Solder toll 30u" MIN Ni underplated.												
A	HOUSING	1	LCP E301	BLACK												
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR												
UNLESS OTHERWISE SPECIFIED TOLERANCES																
DECIMALS:	ANGLES:	<table><tr><td colspan="2">TITLE: NANO SIM CARD 6P 1.5H</td></tr><tr><td colspan="2">WITH DETECT PIN</td></tr><tr><td>PART NO.</td><td>105080804R003</td></tr><tr><td>DRAWN</td><td>BROKEN</td></tr><tr><td>CHKD</td><td>2012.05.21</td></tr><tr><td>APVD</td><td></td></tr></table>			TITLE: NANO SIM CARD 6P 1.5H		WITH DETECT PIN		PART NO.	105080804R003	DRAWN	BROKEN	CHKD	2012.05.21	APVD	
TITLE: NANO SIM CARD 6P 1.5H																
WITH DETECT PIN																
PART NO.	105080804R003															
DRAWN	BROKEN															
CHKD	2012.05.21															
APVD																
X : ±0.5	X : ±2°	SCALE 1:1														
X.X : ±0.3	X.X : ±1°	UNIT: mm														
X.XX : ±0.2		 														
CUSTOMER COPY		SIZE: A4	SHEET: 10 of 1	REV: B												