
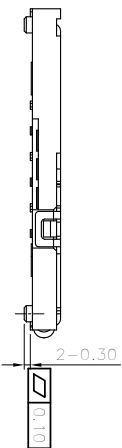
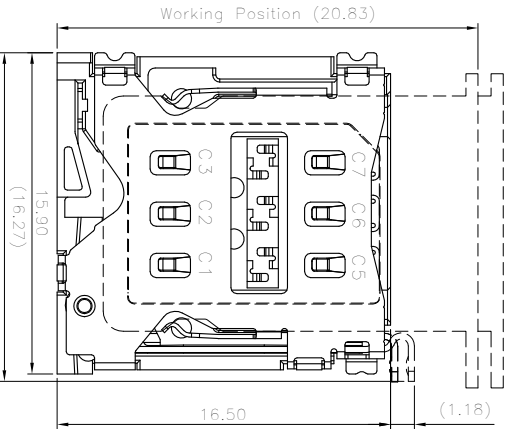




THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

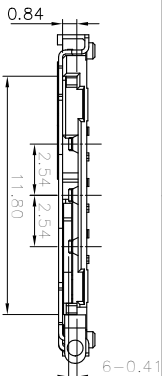



NOTE:

1. ELECTRICAL CHARACTERISTICS
 - 1-1. VOLTAGE RATING: 12V DC.
 - 1-2. CURRENT RATING: 1.0 A.
 - 1-3. CONTACT RESISTANCE: 60 milliohms MAX.
 - 1-4. INSULATION RESISTANCE: 1000 Megohms MIN.
 - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
2. MECHANICAL CHARACTERISTICS
 - 2-1. CONTACT NORMAL FORCE: 0.3~0.9N CONTACT.
 - 2-2. DURABILITY: 5000 CYCLES.
 3. SALT SPRAY: 24H.
 4. OPERATING TEMPERATURE: -40°C~85°C.
 5. RoHS 2002/95/EC COMPLIANT.
 6. MPQ : 1000PCS/REEL.

FOR 1 MINUTE.

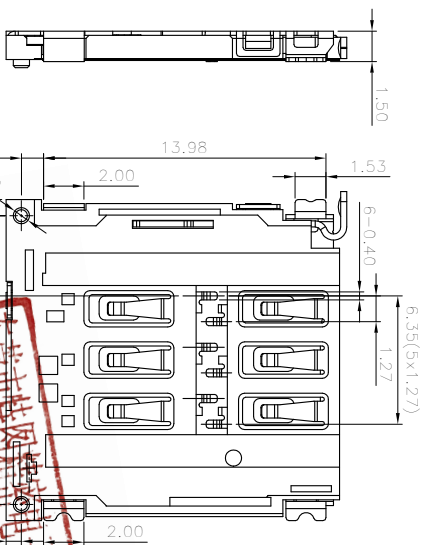



SIM pin Assignment	
PIN#	Name
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O

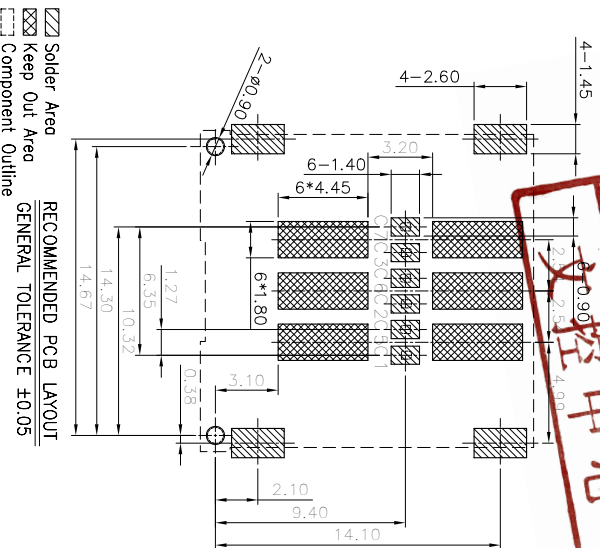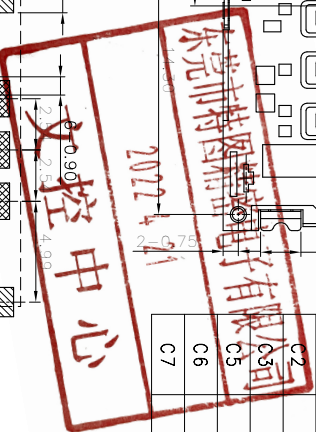

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

Keep Out Area
Component Outline

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	TOM	2011.03.22

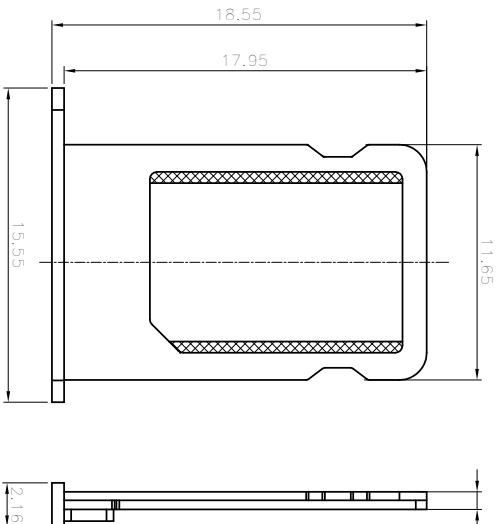

Regular type
P/N:1050808AR014
Customized type (Other shapes or Other finish)

UNLESS OTHERWISE SPECIFIED TOLERANCES		DECIMALS:		ANGLES:	
X		:±0.5		X :±2°	
X.X		:±0.3		X.X :±1°	
X.XX		:±0.2			
NO DESCRIPTION		QTY		MATERIAL	
A HOUSING		1		LCP E30I	
B CONTACT		6		C5I91	
C SHELL		1		SUS 304	
D LEVER		1		SUS	
E CAM		1		SUS	
TITLE: NANO SIM CARD 6P 1.5H		PART NO.		TOM	
W/O DETECT PIN		1050808AR002		2011.03.22	
DWN		CHND			
APVD		UNIT: mm			
SCALE 1:1		SHEET: 10F1		REV: A	



CUSTOMER COPY