


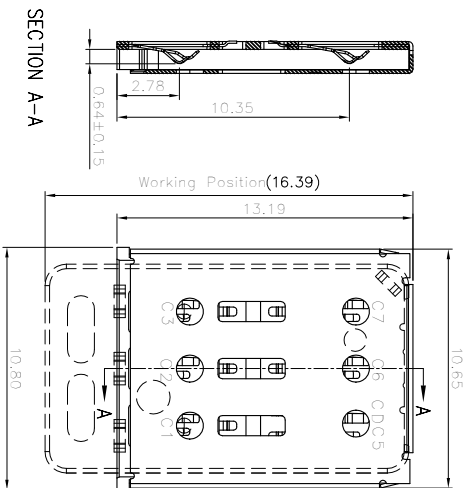



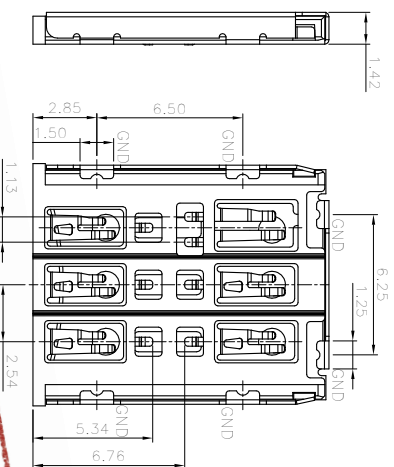

1. ELECTRICAL CHARACTERISTICS
 - 1-1. VOLTAGE RATING: 12V DC.
 - 1-2. CURRENT RATING: 1.0 A.
 - 1-3. CONTACT RESISTANCE: 60 milliohms MAX.
 - 1-4. INSULATION RESISTANCE: 1000 Megohms MIN.
 - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
2. MECHANICAL CHARACTERISTICS
 - 2-1. CONTACT NORMAL FORCE:0.3~0.9N CONTACT 2-2. DURIBILITY:5000 CYCLES.
 - 2-3. SALT SPRAY: 24H.
4. OPERATING TEMPERATURE:-40℃~85℃.
5. RoHS 2011/65/EU COMPLIANT.
6. MPQ : 1800PCS/REEL.

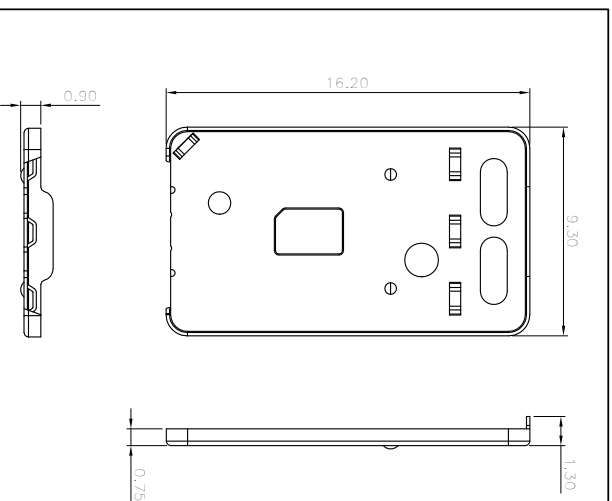

SIM pin Assignment	
PIN#	Name
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O



Regular type
P/N:1050630AR002

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	ZHARKO	2018.03.22

C	SHELL	1	STAINLESS STEEL	1" Au PLATED
B	CONTACT	7	COPPER ALLOY	1u/Au plated on contact area G/F plated on Solder tail All over Nickel Plated .
A	HOUSING	1	LCF UL94-V0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: NANO SIM CARD 6+1P 1.42H 抽展式带开便薄片(1.08W穿板)		
		PART NO.	1050630AR001	
		DWN	ZHAKRO	2018.03.22
DECIMALS:	ANGLES:	CHRD		
X : ±0.5	X : ±2°	APVD		
X.X : ±0.3	X.X : ±1°			
X.XX : ±0.2		SCALE 1:1	UNIT: mm	
		CUSTOMER COPY		
		SIZE: A4	SHEET: 10F1	REV: A



TITLE: NANO SIM CARD 6+1P 1.42H
抽屜式帶帶開偵測PIN (10.8W窄版)

PART NO.	1050630AR001
----------	--------------

DWN	ZHARKO	2018.03.22
-----	--------	------------

CHKD		
CHKS		

APVD		
CAVE 1		

SCALE: 1:1	UNIT: mm	
SIZE: A	SHEET: 1 OF 1	REV: A

COSIOMEN CUF1	SIZE: A4	SHEET: 10/1	REV: A
---------------	----------	-------------	--------