

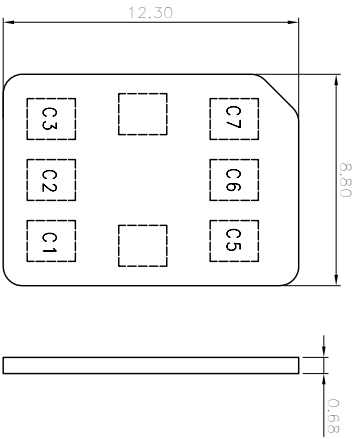
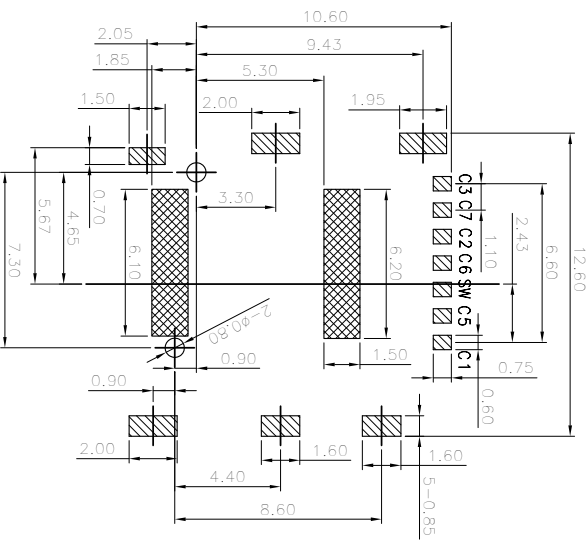
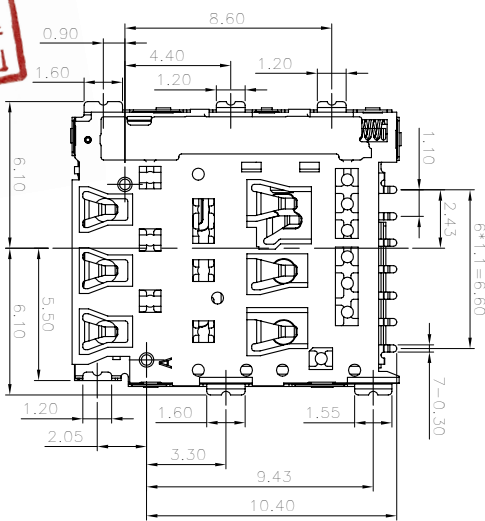
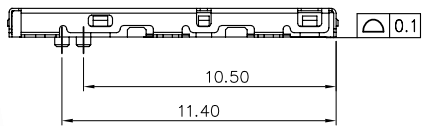
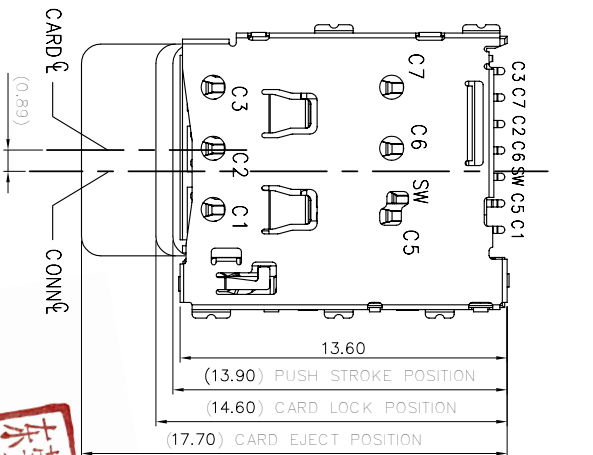
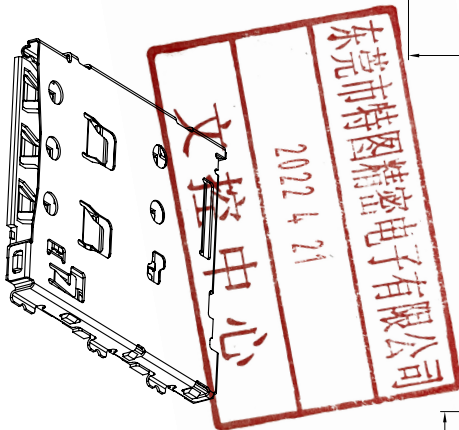


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

ROHS Compliant

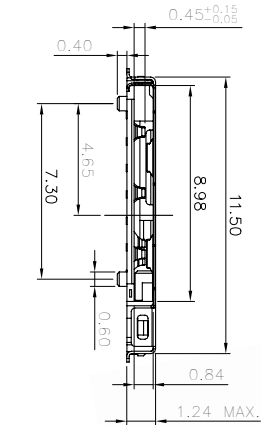

SIM pin Assignment	
PIN#	Nome
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O

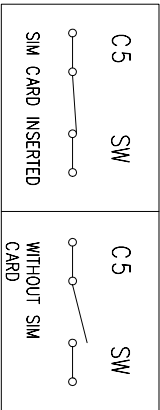

- NOTE:
- ELECTRICAL CHARACTERISTICS
 - VOLTAGE RATING: 12V DC.
 - CURRENT RATING: 1.0 A.
 - CONTACT RESISTANCE: 60 milliohms MAX.
 - INSULATION RESISTANCE: 1000 Megohms MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
 - MECHANICAL CHARACTERISTICS
 - CONTACT NORMAL FORCE: 0.3~0.9N CONTACT.
 - DURABILITY: 5000 CYCLES.
 - SALT SPRAY: 24H.
 - OPERATING TEMPERATURE: -40°C~85°C.
 - RoHS 2002/95/EC COMPLIANT.
 - MPQ : 1600PCS/REEL.

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

Keep Out Area

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	KEN	2020.12.12

F	SPRING	1	STAINLESS STEEL	NA
E	LINK	1	STAINLESS STEEL	NA
D	SLIDE	1	THERMOPLASTIC UL94V-0	BLACK
C	SHELL	1	STAINLESS STEEL	Ni PLATING
B	CONTACT	7	COPPER ALLOY	Au 1u" plated on contact area and Solder tail. All over Nickel Plated .
A	HOUSING	1	LCP UL94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:	ANGLES:			
X : ±0.5	X : ±2°			
X.X : ±0.3	X.X : ±1°			
X.XX : ±0.2				
				