


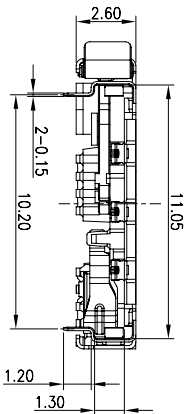

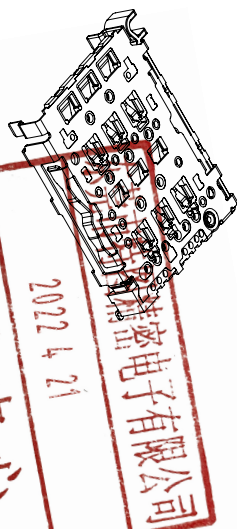

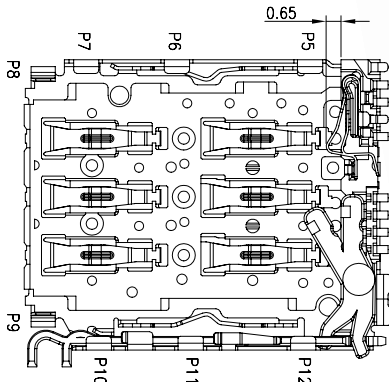
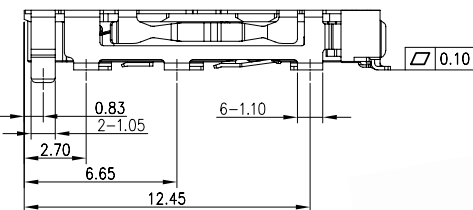



SHELL BLOCK	
SIM Pin Assignment	
Pin#	Name
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	DATA
P1	DETECT
P2	S/W GND
P3~P12	GND

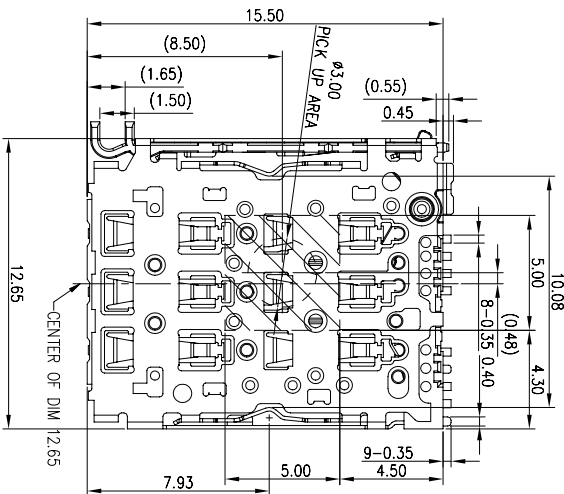

- 1.SPECIFICATIONS:
- 1-1.VOLTAGE RATING: 10V;
 - 1-2.CURRENT RATING:0.5A;
 - 1-3.INSULATION RESISTANCE: 1.000MΩ MIN;
 - 1-4.CONTACT RESISTANCE: 150mΩ MAX;
 - 1-5.DURABILITY: 3,000 CYCLES;
 - 1-6.PACKING NUMBER : 1200PCS/REEL.
- 2.RoHS 2002/95/EC COMPLIANT.

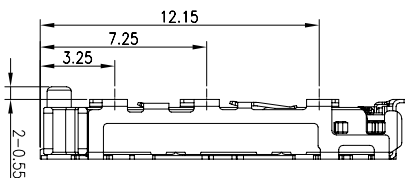


RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

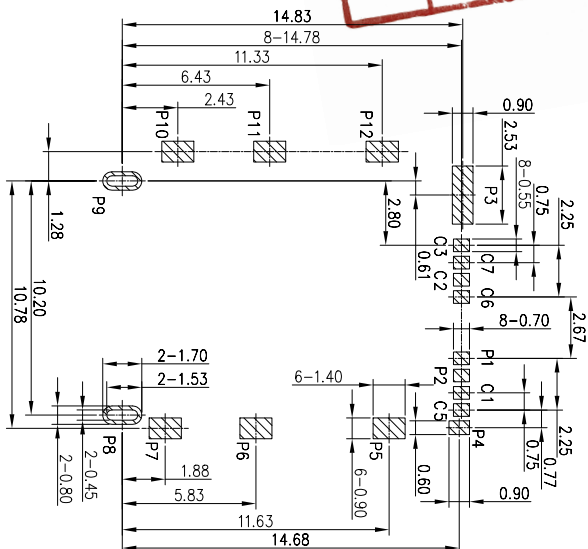

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	BROKEN	2021.09.10

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
H	MYLAR	1	PET	
G	RIVET	1	SUS301	3u" Au plated on contact area
F	SWITCH	1	C5240	1u" Au plated on Solder toll
E	CAM	1	SUS301	All over Nickel Plated
D	PUSHER	1	SUS301	1u" Au plated on Solder toll
C	SHELL	1	SUS301	All over Nickel Plated
B	CONTACT	6	C5240	3u" Au plated on contact area
A	HOUSING	1	LCP	1u" Au plated on Solder toll
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:	ANGLES:			
X : ±0.5	X : ±2°			
X.X : ±0.3	X.X : ±1°			
X.XX : ±0.2				



TITLE:	NANO SIM卡二插面卡座-SHELL BLOCK 6+2P 2.60H
PART NO.	1050629BR004
DWG	BROKEN
CHD	2021.09.10
APVD	
SCALE	1:1
UNIT:	mm
CUSTOMER COPY	SIZE: A4
SHEET:	10F2
REV:	A