
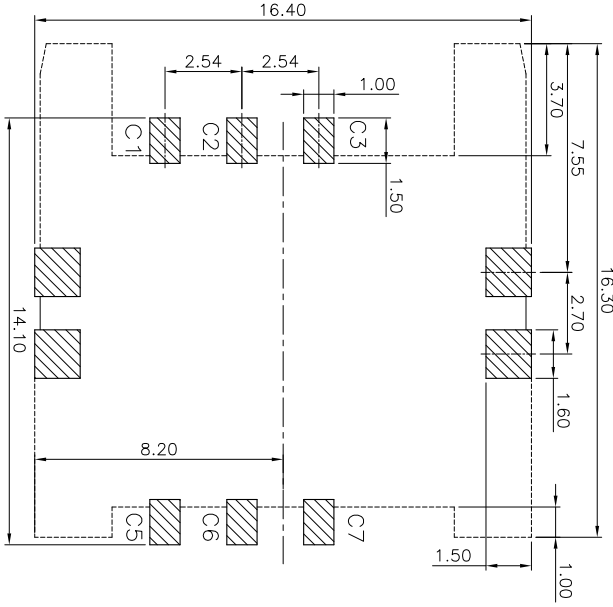
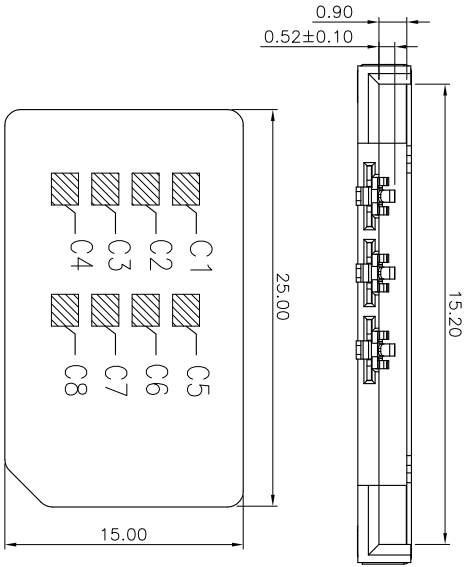
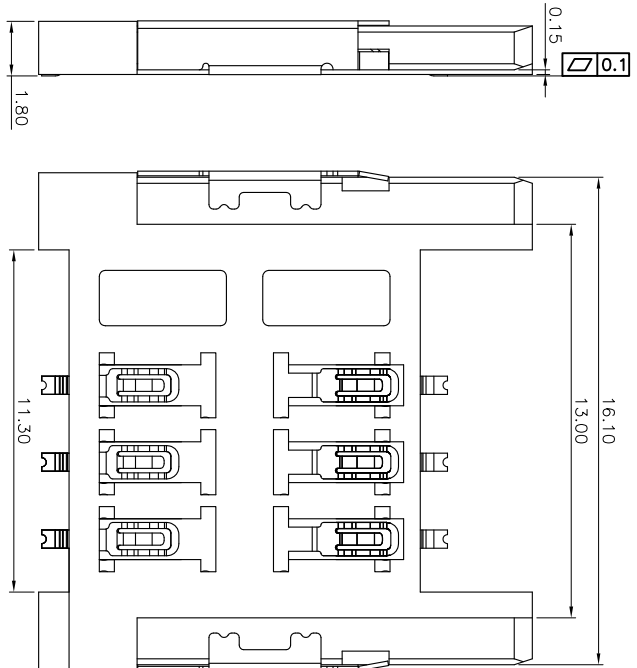


1 2 3 4 5 6 7 8

1 2 3 4 5 6 7 8

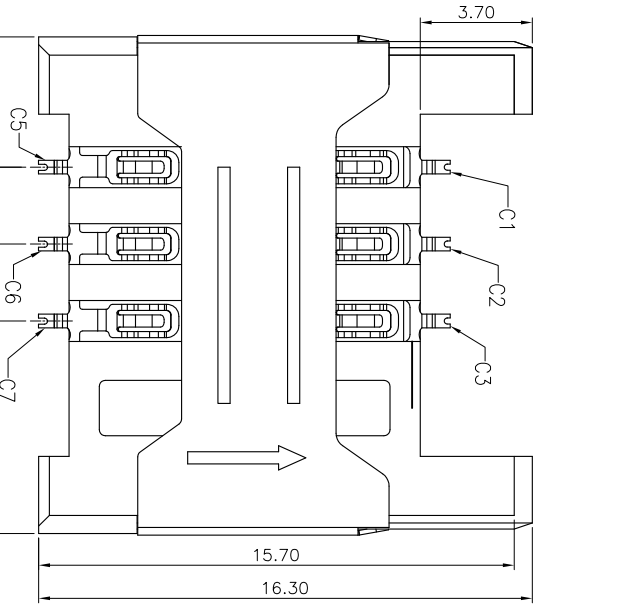

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

NOTE:

1. ELECTRICAL CHARACTERISTICS
 - 1-1. VOLTAGE RATING: 15V DC.
 - 1-2. CURRENT RATING: 1.0 A.
 - 1-3. CONTACT RESISTANCE: 50 milliohms MAX.
 - 1-4. INSULATION RESISTANCE: 1000 Megohms MIN.
 - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
2. MECHANICAL CHARACTERISTICS
 - 2-1. RETENTION FORCE: 100gf MIN./PIN.
 - 2-2. DURABILITY: 5000 CYCLES.
 - 3. SALT SPRAY: 24H.
 - 4. OPERATING TEMPERATURE: -40°C~85°C.
 - 5. ROHS 2002/95/EC COMPLIANT.
 - 6. MPQ : 1000PCS/REEL.

SIM pin Assignment	
PIN#	Name
C1	VCC
C2	RST
C3	CLK
C4	N/A
C5	GND
C6	VPP
C7	I/O
C8	N/A

C	SHELL	1	STAINLESS STEEL 0.15t	Gold plated on Solder tail All over Nickel plated.
B	CONTACT	6	COPPER ALLOY 0.15t	Gold plated on contact area Ni plated on Solder tail All over Nickel plated.
A	HOUSING	1	HIGH-TEMPERATURE PLASTIC U94-10	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:		ANGLES:		
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
TITLE: SIM CARD 6P 1.80H				
W/LOCATION				
PART NO.	10506064R006			
DWG	BROKEN			
CHKD	2023.02.14			
APVD				
SCALE 1:1		UNIT:	mm	
SIZE: A4		SHEET:	10F1	
CUSTOMER COPY		REV:	C	

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
B	MODIFY	BROKEN	2013.05.19
C	MODIFY	BROKEN	2023.02.14