
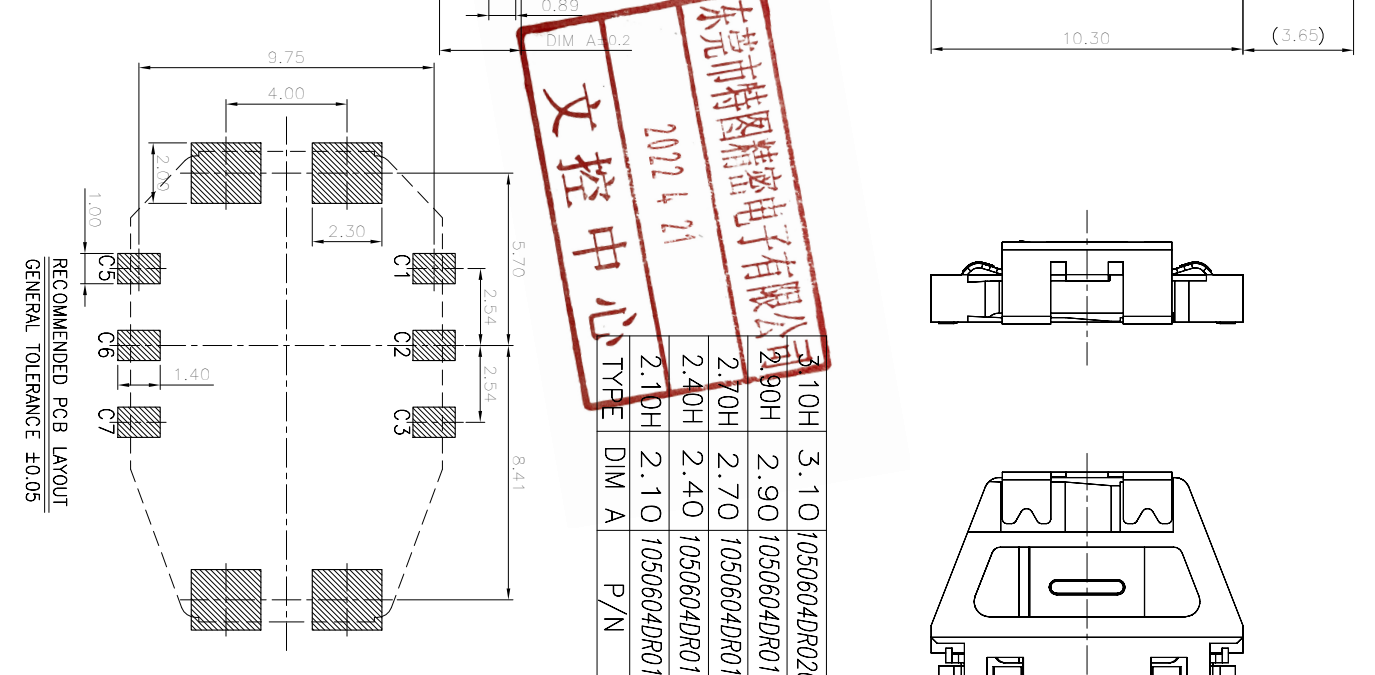


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

ROHS Compliant

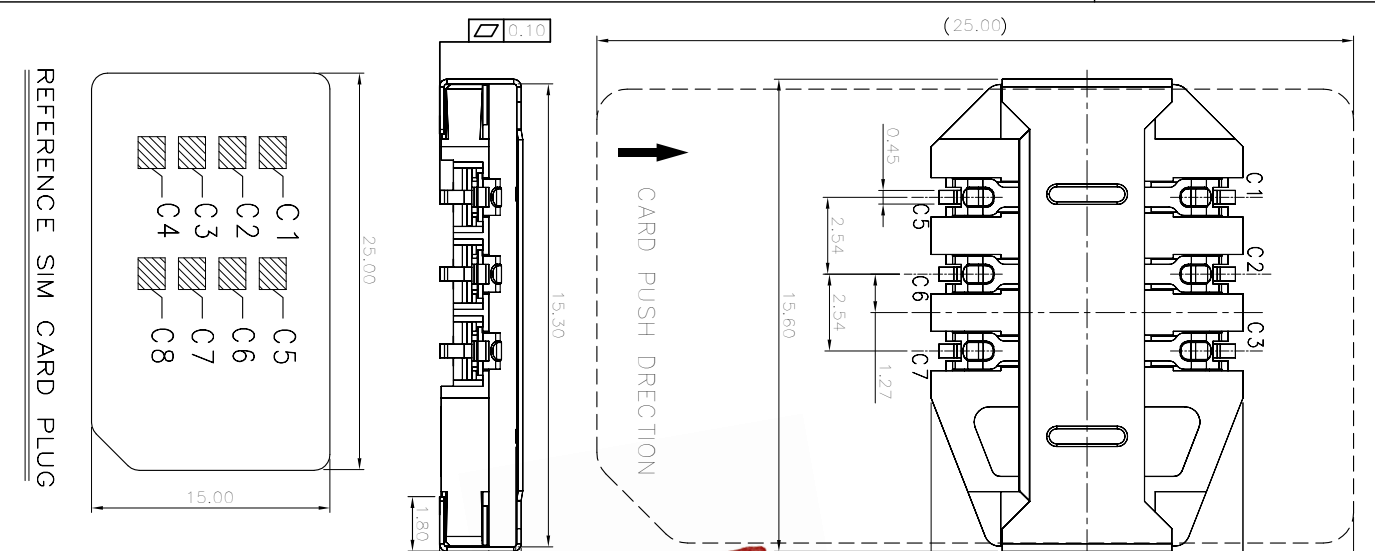

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	JAMES	2011.03.22
B	MODIFY	JAMES	2020.01.07

SIM pin Assignment	PIN#	Name
C1	VCC	
C2	RST	
C3	CLK	
C4	N/A	
C5	GND	
C6	VPP	
C7	I/O	
C8	N/A	

TYPE	DIM A	P/N
2.10H	2.10	1050604DR016
2.40H	2.40	1050604DR017
2.70H	2.70	1050604DR018
2.90H	2.90	1050604DR019
3.10H	3.10	1050604DR020

C	SHELL	1	STAINLESS STEEL 0.15t	NI PLATING
B	CONTACT	6	COPPER ALLOY 0.15t	Gold plated on contact area Gold plated on Solder toll All over Nickel Plated.
A	HOUSING	1	HIGH-TEMPERATURE PLASTIC UL94-V0 BLACK	
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X :±0.5 X :±2°				
X.X :±0.3 X.X :±1°				
X.XX :±0.2 X.XX :±0.2				

TITLE: SIM CARD 6P(DIAMOND)		PART NO.	1050604DR0XX
连桥式		DWN	JAMES
		CHKD	2020.01.07
		APVD	
SCALE 1:1		UNIT: mm	
CUSTOMER COPY		SIZE: A4	SHEET: 10F1
		REV: A	

NOTE: 1. ELECTRICAL CHARACTERISTICS 1-1. VOLTAGE RATING: 15V DC. 1-2. CURRENT RATING: 1.0 A. 1-3. CONTACT RESISTANCE: 50 milliohms MAX. 1-4. INSULATION RESISTANCE: 1000 Megohms MIN. 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE. 2. MECHANICAL CHARACTERISTICS 2-1. CONTACT NORMAL FORCE:0.3~0.9N CONTACT. 2-2. DURABILITY:5000 CYCLES. 3. SALT SPRAY: 24H. 4. OPERATING TEMPERATURE:-40C~85C. 5. RoHS 2002/95/EC COMPLIANT. 6. MPQ : 1250PCS/REEL.