
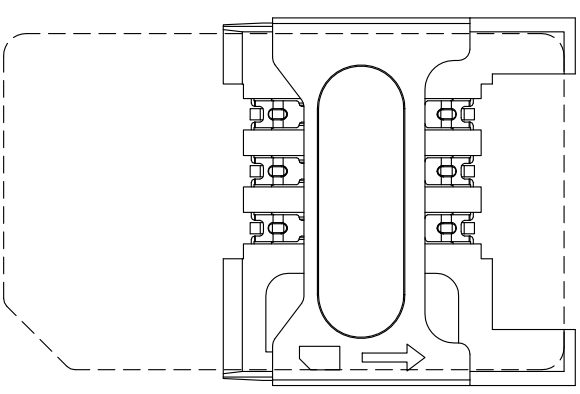
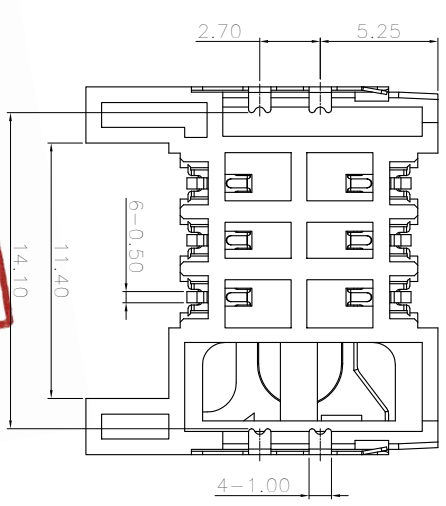
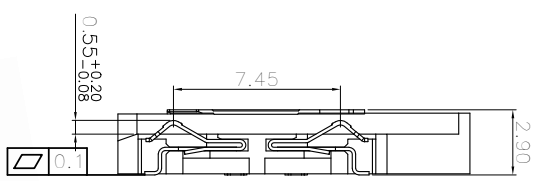


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.


ROHS Compliant

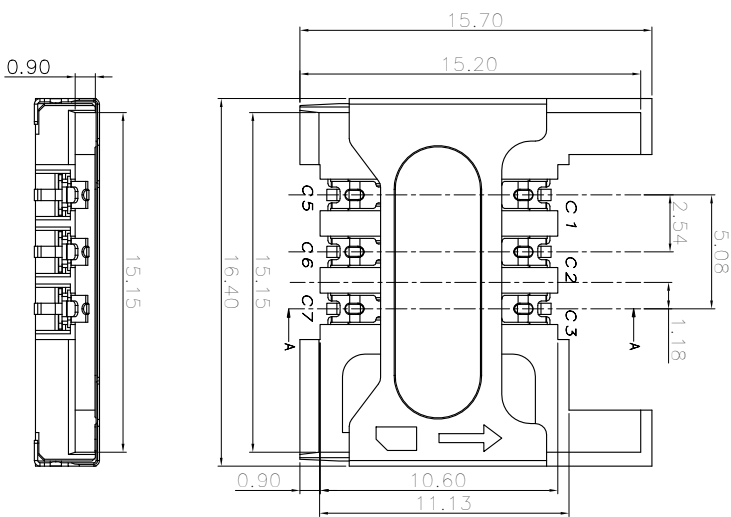


NOTE:

1. ELECTRICAL CHARACTERISTICS
 - 1-1. VOLTAGE RATING: 15V DC.
 - 1-2. CURRENT RATING: 1.0 A.
 - 1-3. CONTACT RESISTANCE: 50 milliohms MAX.
 - 1-4. INSULATION RESISTANCE: 1000 Megohms MIN.
 - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
2. MECHANICAL CHARACTERISTICS
 - 2-1. CONTACT NORMAL FORCE: 0.3~0.9N CONTACT.
 - 2-2. DURABILITY: 5000 CYCLES.
 3. SALT SPRAY: 24H.
 4. OPERATING TEMPERATURE: -40°C~85°C.
 5. ROHS 2002/95/EC COMPLIANT.
 6. MPQ : 900PCS/REEL.

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

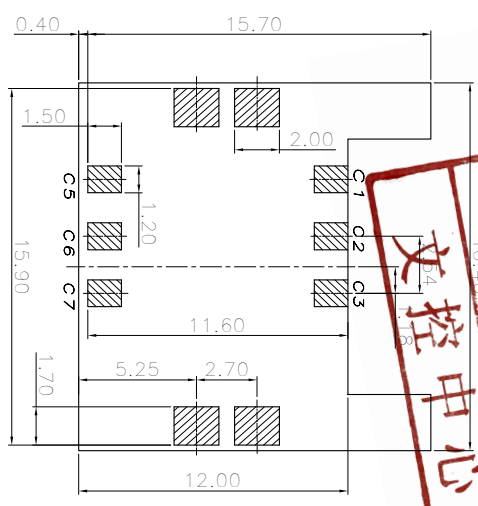

东莞市特图精密电子有限公司
2022.4.21
文控中心

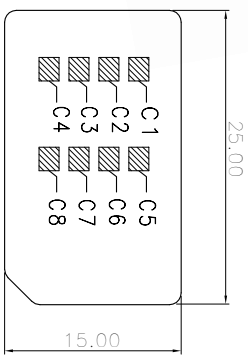

REFERENCE SIM CARD PLUG

SIM pin Assignment	
PIN#	Name
C1	VCC
C2	RST
C3	CLK
C4	M/A
C5	GND
C6	VPP
C7	I/O
C8	N/A

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	JAMES	2011.03.22
B	MODIFY	BROKEN	2013.05.16

C	SHELL	1	STAINLESS STEEL 0.15t	Ni PLATING
B	CONTACT	6	COPPER ALLOY 0.15t	Gold plated on contact area Gold plated on Solder toll All over Nickel Plated.
A	HOUSING	1	HIGH-TEMPERATURE PLASTIC UL94-V0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X :±0.5 X :±2°				
X.X :±0.3 X.X :±1°				
X.XX :±0.2				
TITLE: SIM CARD 6P 2.90H				
PART NO. 1050606AR013				
DWG BROKEN 2013.05.16				
CHWD				
APVD				
SCALE 1:1				
UNIT: mm				
CUSTOMER COPY				
SIZE: A4				
SHEET: 10F1				
REV: B				