
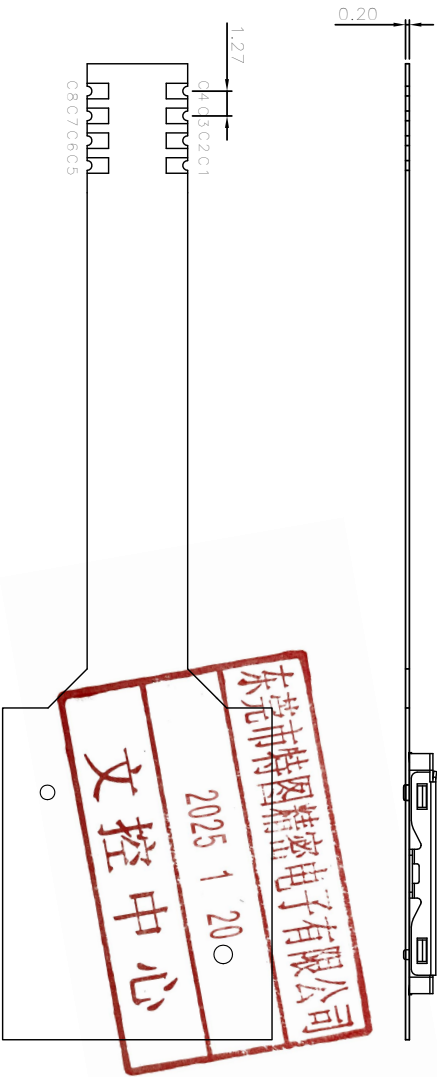
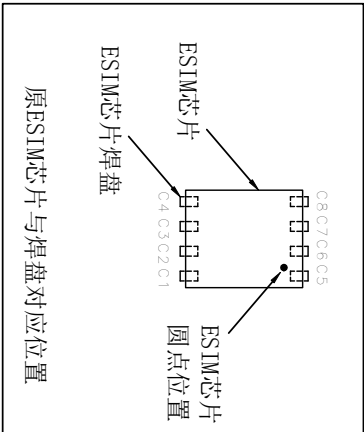


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

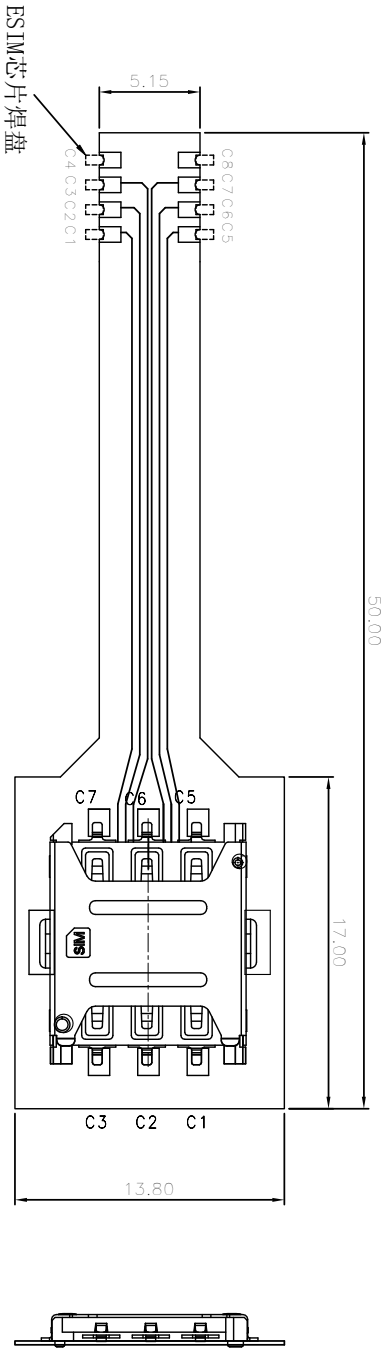

NOTE:

- 1. ELECTRICAL CHARACTERISTICS
 - 1-1. VOLTAGE RATING: 20V MAX
 - 1-2. CURRENT RATING: 3A MAX
 - 1-3. CONTACT RESISTANCE: 40 milliohms MAX.
 - 1-4. INSULATION RESISTANCE: 100 Megohms MIN.
 - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC R.M.S.
- 2. MECHANICAL CHARACTERISTICS
 - 2-1. MATING FORCE: 5~20N
 - 2-2. UNMATING FORCE: 8~20N
 - 2-3. DURABILITY: 5000 CYCLES
- 3. SALT SPRAY: 24H
- 4. OPERATING TEMPERATURE: -40°C~85°C
- 5. RoHS 2011/65/EU COMPLIANT.

CIRCUIT DIAGRAM

ESIM 芯片焊盘

NANO SIM CARD

C1
C2
C3
C5
C6
C7

REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	NEW		CRAL	2024.12.31

B	PCB	1	软排线L=0.2mm		T-172
A	SIM CARD	1	NANO SIM CARD GP 1.35H 直插式		1050628AR004
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR	
UNLESS OTHERWISE SPECIFIED TOLERANCES					
DECIMALS:		ANGLES:			
X :±0.5		X :±2°			
X.X :±0.3		X.X :±1°			
X.XX :±0.2					
 					
CUSTOMER COPY					
PART NO.		TITLE:Nano SIM卡插转接sim卡+软排线50.0L			
DWN		1053001AT001			
CHKD		GRAL			
APVD					
SCALE 1:1		UNITS: mm			
SIZE: A4		SHEET: 10F1			
REV: A		 			



PART NO.	1053001AT001
DWN	CRAL
CHKD	2024.12.31
APVD	

SCALE	1:1
UNIT:	mm
REV:	A