

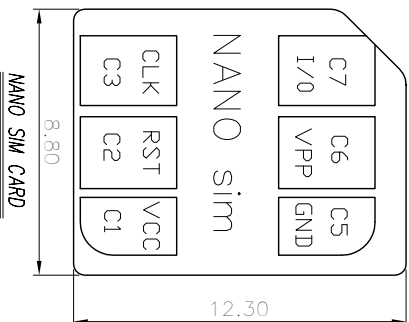
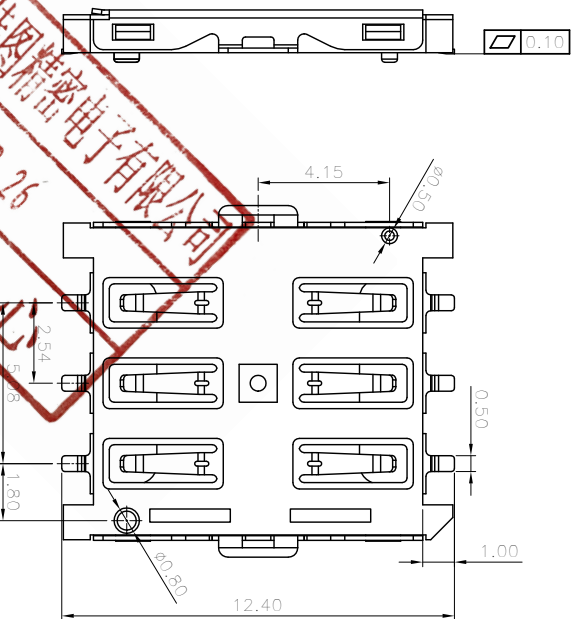


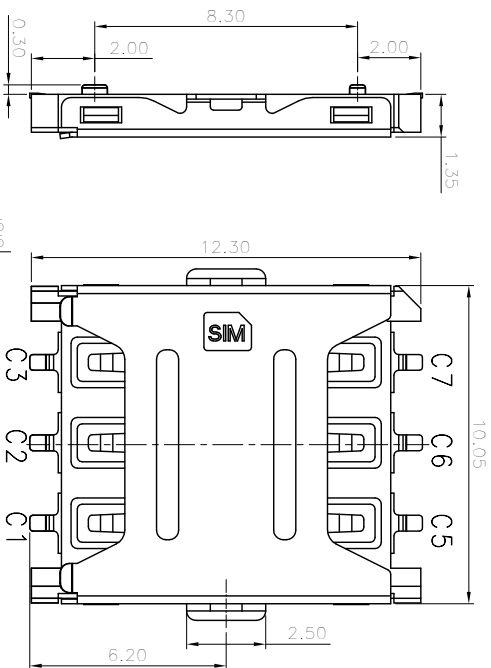



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	JAMS	2011.03.22
B	MODIFY	BROKEN	2013.01.13
C	MODIFY	BROKEN	2016.12.03

SIM pin Assignment	
PIN#	Name
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O

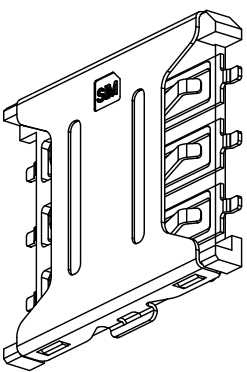

1. ELECTRICAL CHARACTERISTICS

- 1-3. CONTACT RESISTANCE: 60 milliohms MAX.
 - 1-4. INSULATION RESISTANCE: 1000 Megohms MIN.
 - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
- FOR 1 MINUTE.
- 2. MECHANICAL CHARACTERISTICS
 - 2-1. CONTACT NORMAL FORCE:0.3~0.9N CONTACT.
 - 2-2. DURABILITY:5000 CYCLES.
 - 3. SALT SPRAY: 24H.
 - 4. OPERATING TEMPERATURE:-40℃~85℃.
 - 5. RoHS 2002/95/EC COMPLIANT.
 - 6. MPQ : 1800PCS/REEL.

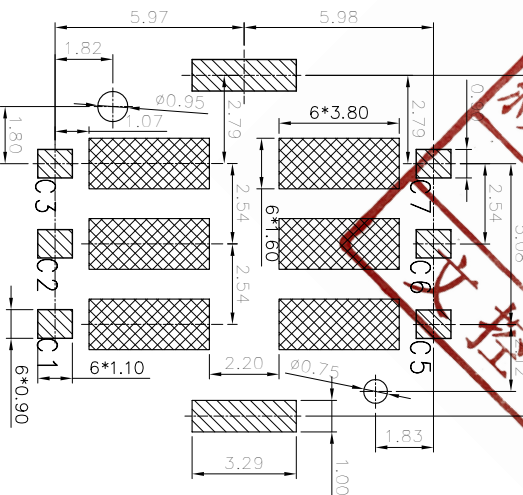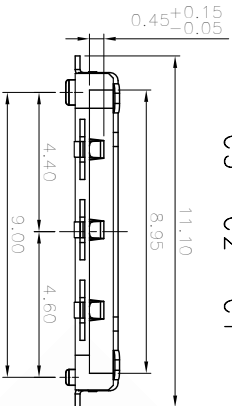

C	SHELL	1	STAINLESS STEEL 0.15t	AU/Ni PLATING
B	CONTACT	6	COPPER ALLOY 0.15t	Gold plated on contact area Gold plated on Solder tail All over Nickel Plated .
A	HOUSING	1	HIGH-TEMPERATURE PLASTIC UL94-V0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: NANO SIM CARD 6P 1.35H 直插式	

SPECIFIED TOLERANCES

[illegible][illegible]

	X	X	+0.3	X	X	+1°
X						
X						

X.XX : ± 0.2 

TITLE:	NANO SIM CARD 6P 1.35H 直插式
PART NO.	1050628AR004

 $\triangleright$

W

7