

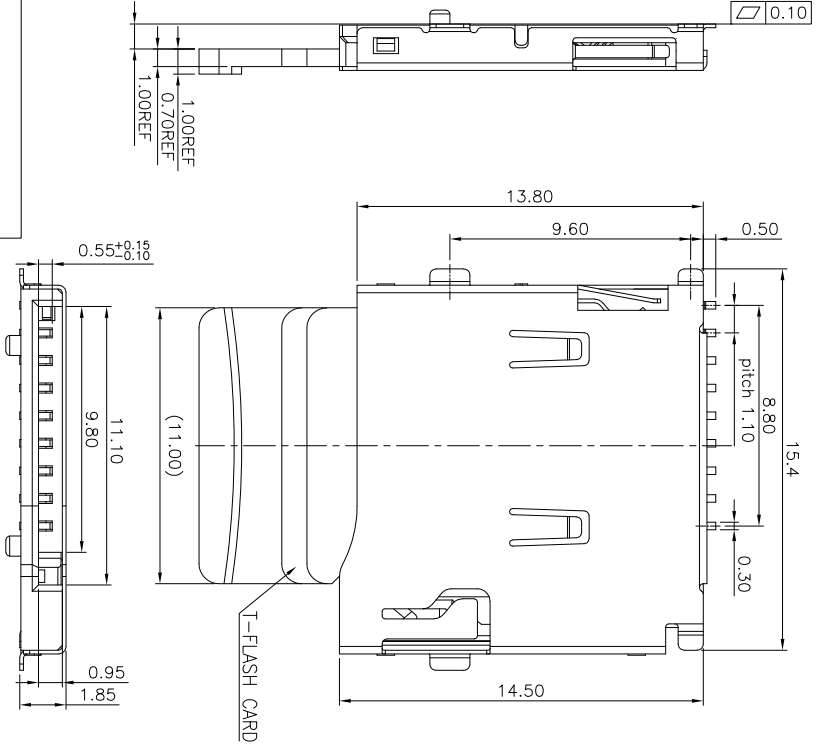
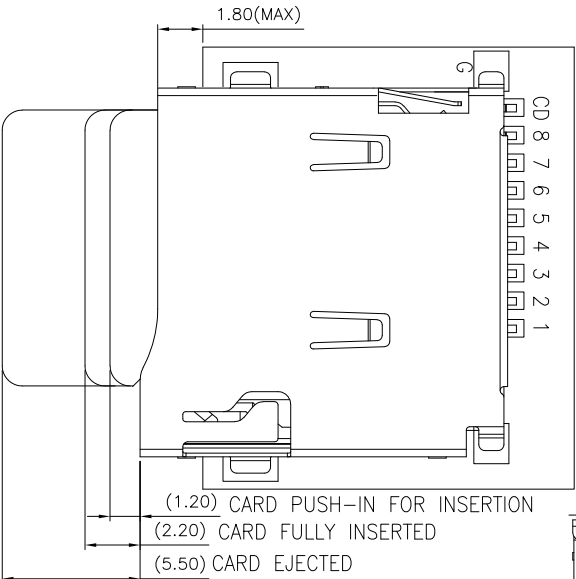



Pin No.	Pin assignment
1	DAT2
2	CD/DAT3
3	CMD
4	VDD
5	CLK
6	VSS
7	DAT0
8	DAT1
Cd	CARD DETECTION
G	GROUND

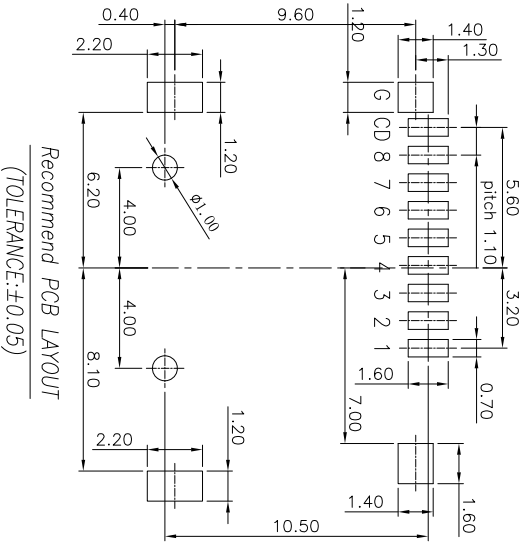

CARD PUSH-IN FOR INSERTION
 CARD FULLY INSERTED
 CARD EJECTED



Recommend PCB LAYOUT
 (TOLERANCE: ±0.05)

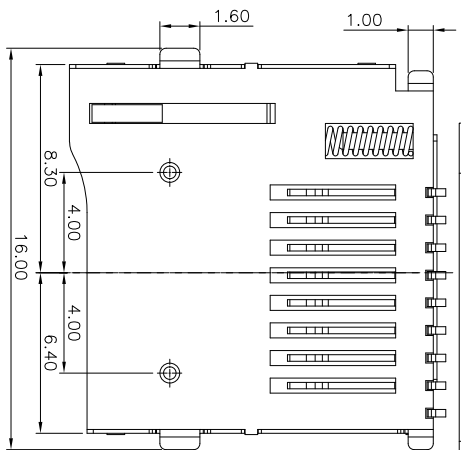

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	TOM	2009.03.29
B	MODIFY	BROKEN	2012.03.01

P/N	FINISH
1 1060802AR013	Gold plated all over
2 1060802AR003	Gold plated on contact area Tin plated on solder tail

CARD DETECTION SWITCH	
WHEN CARD IS EJECTED	WHEN CARD IS INSERTED
OPEN	CLOSE
Cd	Cd
G	G

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS**
 - CONTACT RESISTANCE: 80 milliohms MAX.
 - INSULATION RESISTANCE: 1,000 Megohms MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
- MECHANICAL CHARACTERISTICS**
 - RETENTION FORCE: MIN. 100gf/PPN
 - DURABILITY: 5,000 CYCLES
 - RoHS 2002/95/EC COMPLIANT.

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
C	SHELL	1	STAINLESS STEEL 0.15t	NI PLATING
B	CONTACT	9	COPPER ALLOY 0.15t	See Table All over Nickel Plated .
A	HOUSING	1	HIGH-TEMPERATURE PLASTIC U94-10	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X : ±0.5 X : ±2°

X.X : ±0.3 X.X : ±1°

X.XX : ±0.2 X.XX : ±0.2



TITLE:	
T-FLASH CONN PUSH TYP 1.8H	
PART NO.	1060802AR0X3
DWG	BROKEN
CHKD	2012.03.01
APVD	
SCALE 1:1	UNIT: mm
SIZE: A4	SHEET: 10F1
CUSTOMER COPY	REV: B