



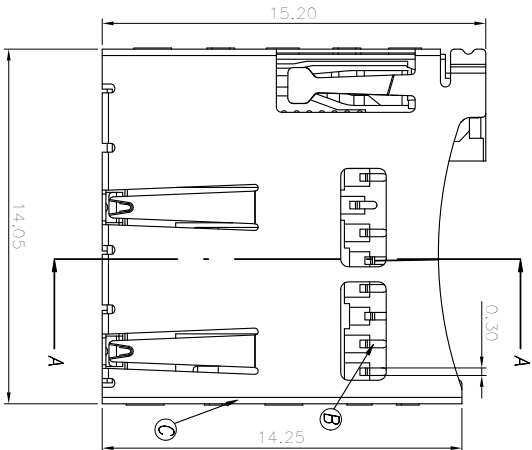
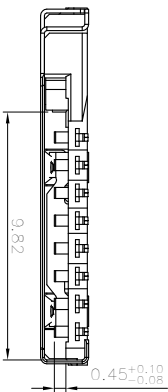



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.




SCALE 2:1



SECTION A-A


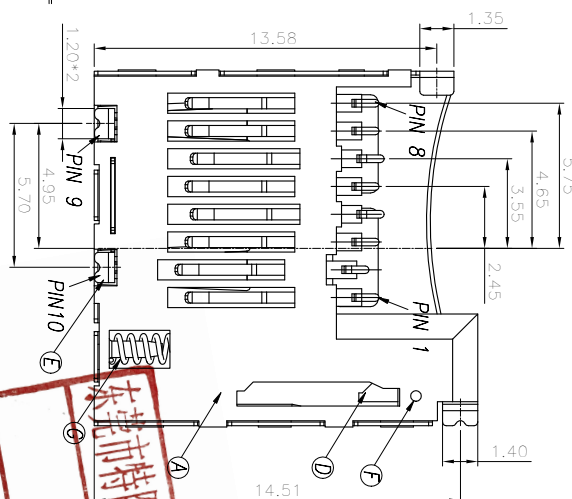


Pin No.	Pin assignment
PIN1	DATA2
PIN2	CD/DAT3
PIN3	CMD
PIN4	VDD
PIN5	CLK
PIN6	VSS
PIN7	DAT0
PIN8	DAT1




NOTE:

- ELECTRICAL CHARACTERISTICS
 - VOLTAGE RATING: 10V DC.
 - CURRENT RATING: 0.5 A.
 - CONTACT RESISTANCE: 80 milliohms MAX.
 - INSULATION RESISTANCE: 1000 Megohms MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
- MECHANICAL CHARACTERISTICS
 - CONTACT NORMAL FORCE:0.3~0.9N CONTACT.
 - DURABILITY:5000 CYCLES.
 - SALT SPRAY: 24H.
 - OPERATING TEMPERATURE: -40°C~85°C.
 - RoHS 2002/95/EC COMPLIANT.
 - MPQ : 1000PCS/REEL.

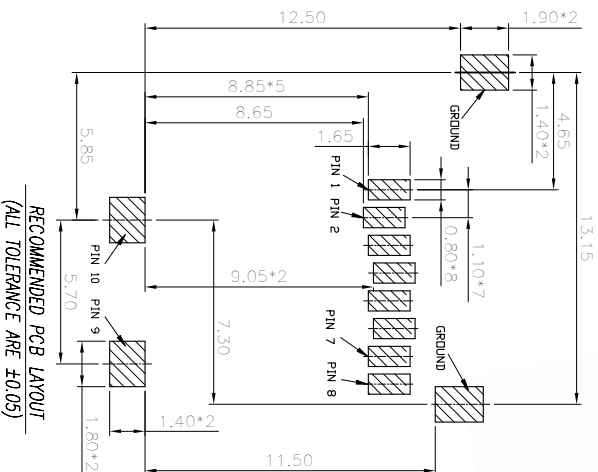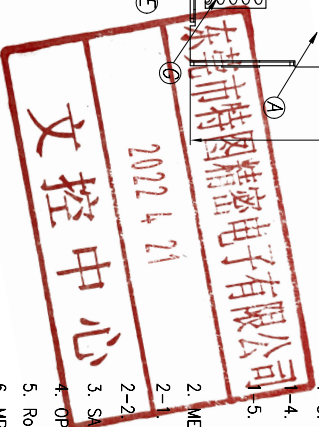

RECOMMENDED PCB LAYOUT
(ALL TOLERANCE ARE ±0.05)

G	SPRING	1	SWP	
F	GUIDE PIN	1	STAINLESS STEEL 0.15t	
E	PEG	1	COPPER ALLOY 0.15t	Au PLATING
D	SLIDE	1	TEMPERATURE PLASTIC U94-V0	BLACK
C	SHELL	1	STAINLESS STEEL 0.15t	Ni PLATING
B	CONTACT	8	COPPER ALLOY 0.15t	Gold flash all over, All over Nickel Plated .
A	HOUSING	1	HIGH-TEMPERATURE PLASTIC U94-V0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:		ANGLES:		
X	:±0.5	X	: ±2°	
X.X	:±0.3	X.X	: ±1°	
X.XX	:±0.2			
  CUSTOMER COPY				
TITLE: T-FLASH CONN PUSH TYPE(Normal Close)				
PART NO.		1060802GR001		
DWN		JAMES		
CHKD		2019.02.13		
APVD				
SCALE 1:1		UNIT: mm		
 CUSTOMER COPY				
SIZE: A4		SHEET: 10F1		REV: B

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	JAMES	2009.03.29
B	ADD VIEW	JAMES	2019.02.13