


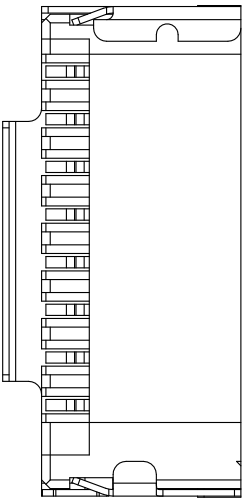
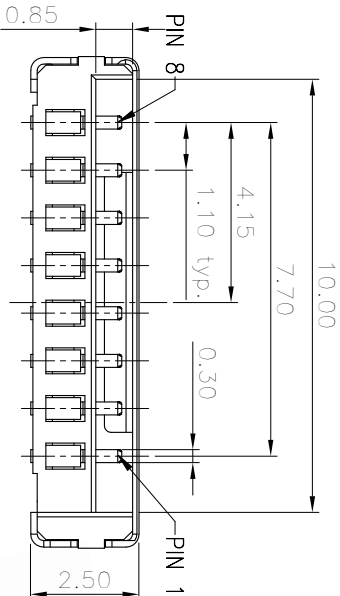


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

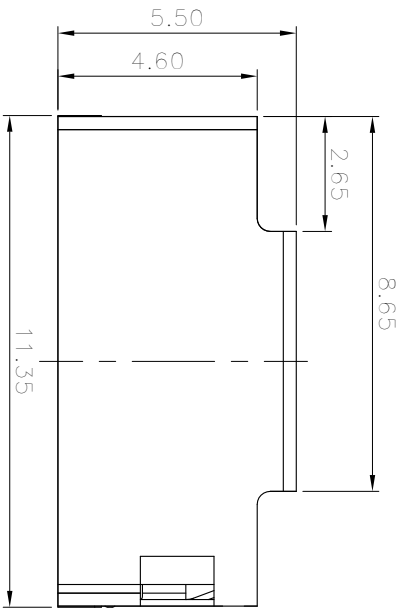


NOTE:

- ELECTRICAL CHARACTERISTICS
 - VOLTAGE RATING: 10V DC.
 - CURRENT RATING: 0.5 A.
 - CONTACT RESISTANCE: 80 milliohms MAX.
 - INSULATION RESISTANCE: 1000 Megohms MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
- MECHANICAL CHARACTERISTICS
 - CONTACT NORMAL FORCE: 0.3~0.9N CONTACT.
 - DURIBILITY: 5000 CYCLES.
 - SALT SPRAY: 24H.
 - OPERATING TEMPERATURE: -40°C~85°C.
 - RoHS 2011/65/EU COMPLIANT.
 - MPQ : 1500PCS/REEL.

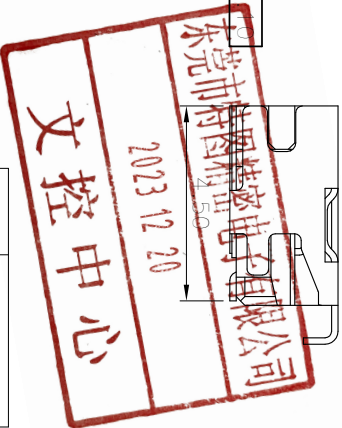

Pin No.	Pin assigment
PIN1	DAT2
PIN2	CD/DAT3
PIN3	CMD
PIN4	VDD
PIN5	CLK
PIN6	VSS
PIN7	DAT0
PIN8	DAT1

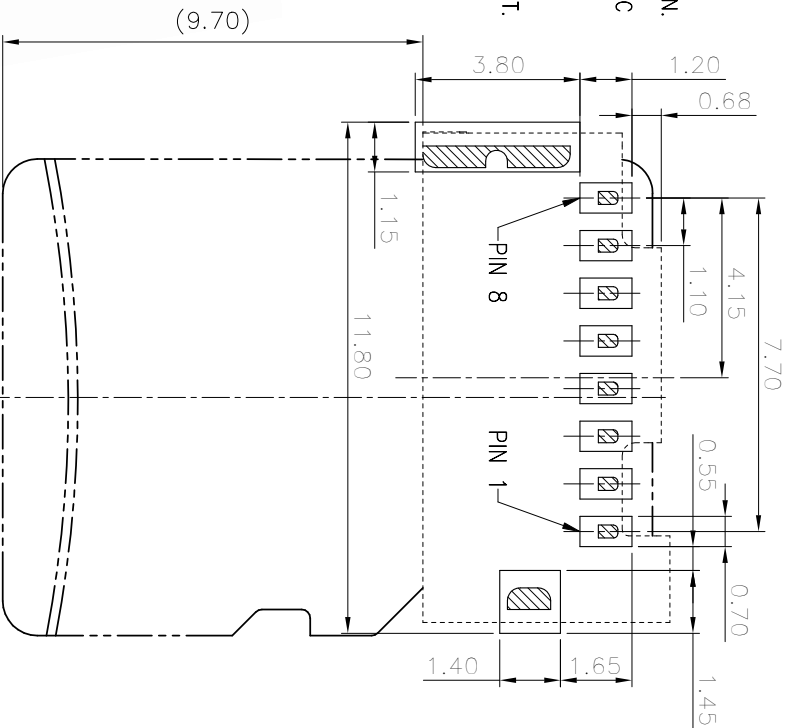

Recommend PCB LAYOUT
(TOLERANCE: ±0.05)

REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
D	MODIFY	BROKEN	2023.03.25	
E	根据实物增加底视图	ZHARKO	2023.12.18	

C	SHELL	1	SUS 201	Gold Plated on Solder tail All over Nickel Plated .
B	CONTACT	8	C2680	Gold Finish On Contact Area Gold Plated on Solder tail All over Nickel Plated .
A	HOUSING	1	LCP	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X .±0.5 X .±2°				
X.X .±0.3 X.X .±1°				
X.XX .±0.2				



TITLE:
T-FLASH CONN 8P Short 2.5H
PART NO. 1060803AR013
DWG ZHARKO 2023.12.18
CHKD
APVD

CUSTOMER COPY
SIZE: A4
SHEET: 10F1
REV: E