


REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A		PRODUCT RELEASE	JAMS	2008.03.29
B		MODIFY	JAMS	2020.09.27
C		MODIFY	BROKEN	2021.01.30

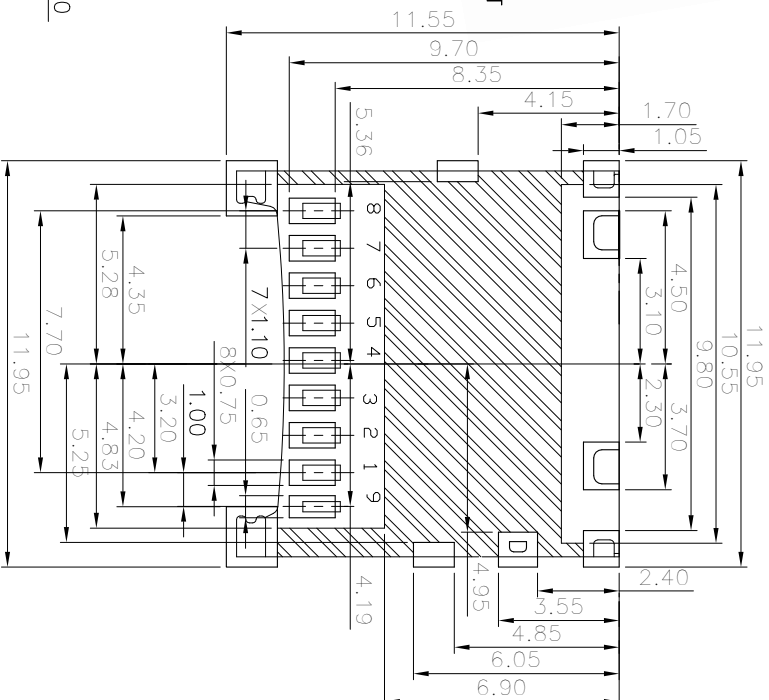

PCB LAYOUT TOP VIEW
(TOLERANCE:±0.05)

1. ELECTRICAL CHARACTERISTICS

- FOR 1 MINUTE.

2-1. RETENTION FORCE: 100gf MIN./PIN

- 2-2. DURABILITY:5000 CYCLES

3. SALT SPRAY: 24H.

4. OPERATING TEMPERATURE: $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$.

5. RoHS 2002/95/EC COMPLIANT.

6. MPQ : 1500PCS/REEL.

UNLESS OTHERWISE
SPECIFIED TOLERANCES


UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS: ANGLES:

DECIMALS. ANGLES.

λ	± 0.3	λ	$\pm 1^\circ$
χ	± 0.3	χ	$\pm 1^\circ$

X.XX : ±0.2



TITLE:
T-F CARD CONN 9P SMT 1.32H

PART NO.	1060806AR001
----------	--------------

DWN	BROKEN	2021.01.30
-----	--------	------------

CHKD		
ADLYD		

SCALE 1:1	1/1NIT: mm	
-----------	------------	---