

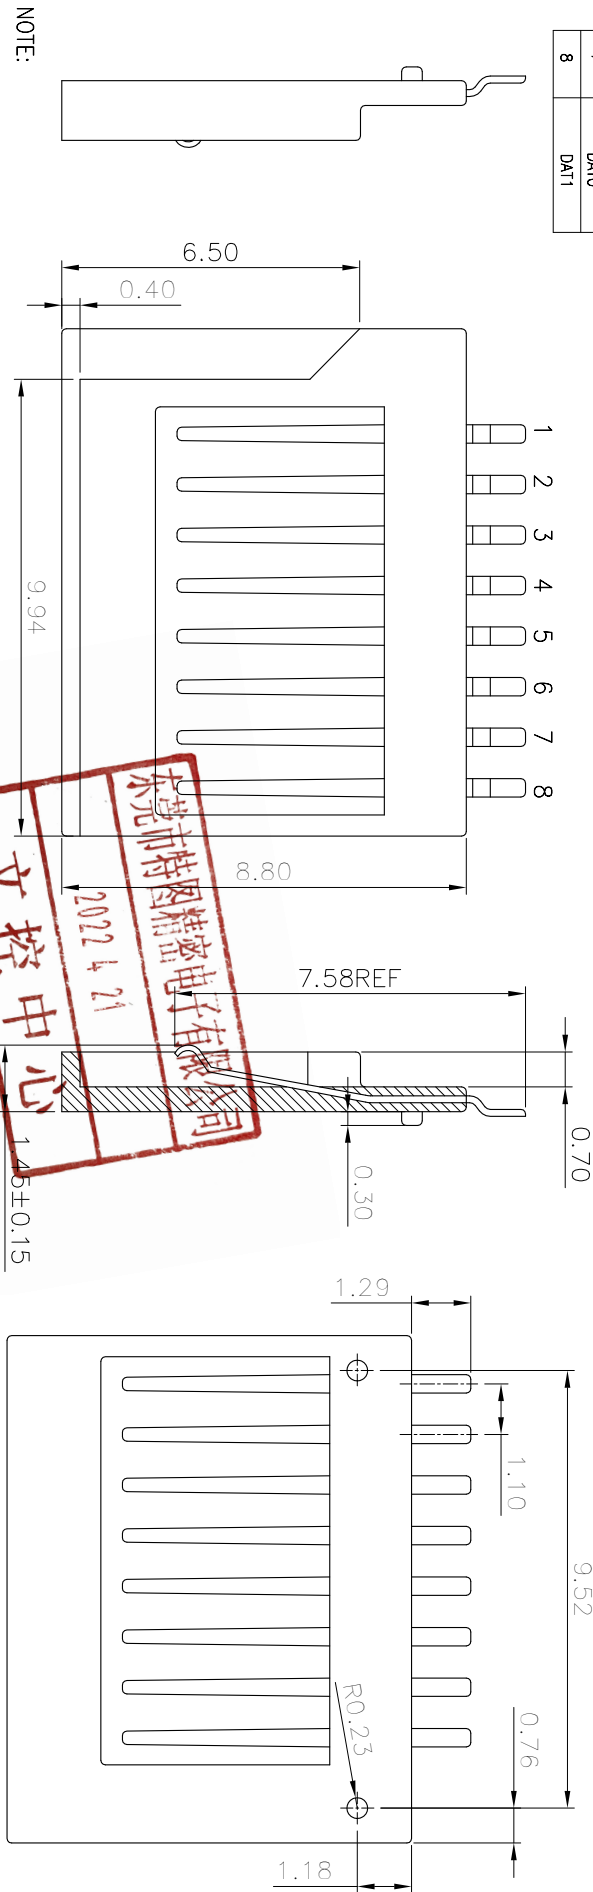


Pin No.	Pin assignment
1	DA12
2	CD/DA13
3	CMD
4	VDD
5	CLK
6	VSS
7	DATA
8	DATA

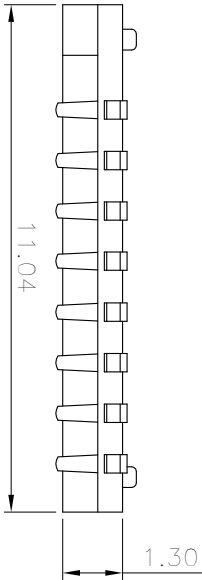

NOTE:

- ELECTRICAL CHARACTERISTICS
 - VOLTAGE RATING: 10V DC.
 - CURRENT RATING: 0.5 A.
 - CONTACT RESISTANCE: 80 milliohms MAX.
 - INSULATION RESISTANCE: 1000 Megohms MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
- MECHANICAL CHARACTERISTICS
 - CONTACT NORMAL FORCE:0.3~0.9N CONTACT.
 - DURIBILITY:5000 CYCLES.
 - SALT SPRAY: 24H.
 - OPERATING TEMPERATURE: -40℃~85℃.
 - RoHS 2002/95/EC COMPLAINT.

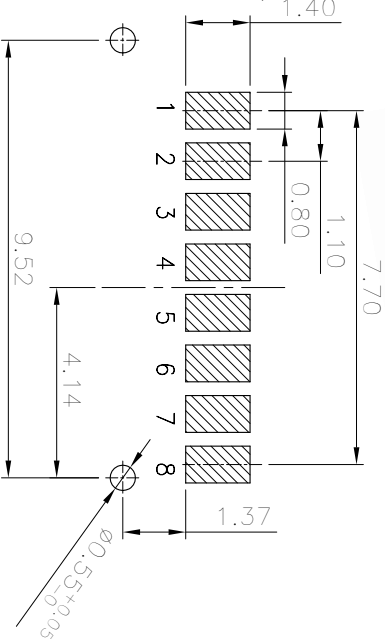

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	JAMES	2008.03.29
B	MODIFY	BROKEN	2010.05.13

P/NO.	PACKING
1060803PTD01	50PCS/BAG
1060803AR005	1800PCS/REEL

TABLE:

B	CONTACT	8	COPPER ALLOY 0.15t	Gold Flash all over.
A	HOUSING			All over Nickel Plated
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X.XX :±0.5 X :±2°
X.XX :±0.3 X.X :±1°
X.XX :±0.2



TITLE: T-FLASH CONN SIMPLE SOCKET
PART NO. 1060803PTD01&AR005
DWG BROKEN 2010.05.13
CHKD
APVD

SCALE 1:1 UNIT: mm

CUSTOMER COPY SIZE: A4 SHEET: 10F1 REV: B

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.