

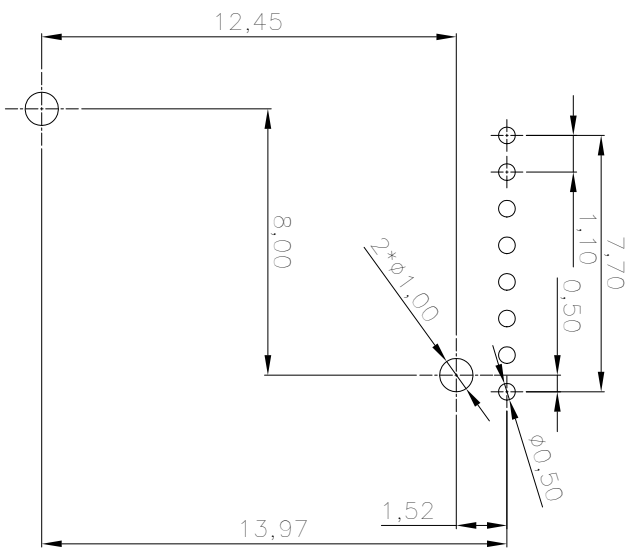
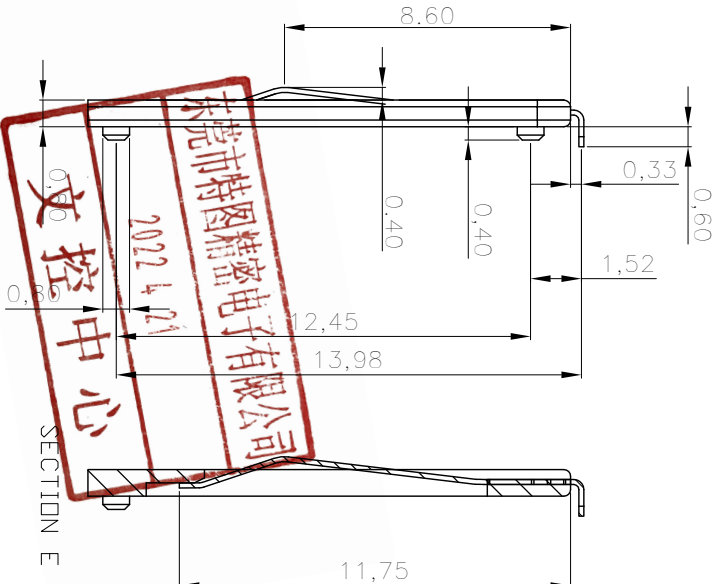


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

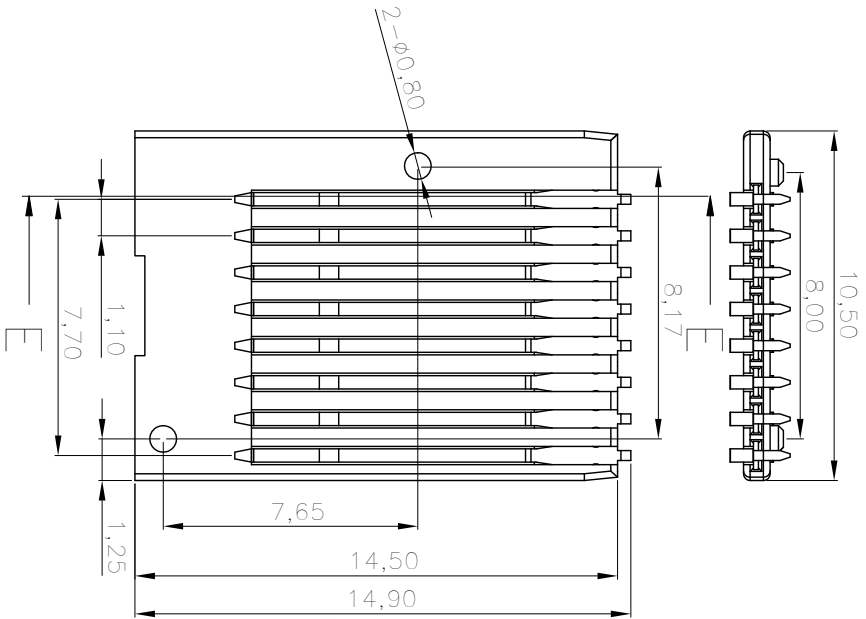

Recommend PCB LAYOUT
(TOLERANCE:±0.05)



NOTE:

1. ELECTRICAL CHARACTERISTICS
 - 1-1. VOLTAGE RATING: 10V DC.
 - 1-2. CURRENT RATING: 0.5 A.
 - 1-3. CONTACT RESISTANCE: 80 milliohms MAX.
 - 1-4. INSULATION RESISTANCE: 1000 Megohms MIN.
 - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
2. MECHANICAL CHARACTERISTICS
 - 2-1. RETENTION FORCE: 100gf MIN./PIN.
 - 2-2. DURABILITY:5000 CYCLES.
 3. SALT SPRAY: 24H.
 4. OPERATING TEMPERATURE:-40C~85C.
 5. ROHS 2002/95/EC COMPLIANT.
 6. MPO : 100PCS/TRAY.

REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	ARES	2018.5.14	
B	MODIFY	BROKEN	2020.8.20	

B	CONTACT	8	COPPER ALLOY	Solid plated on contact area Tin plated on Solder tail All over Nickel Plated.
A	HOUSING			
NO	DESCRIPTION	1	HIGH-TEMPERATURE PLASTIC BLACK	
	UNLESS OTHERWISE SPECIFIED TOLERANCES	QTY	MATERIAL	
			PLATING & COLOR	
	DECIMALS:		ANGLES:	
	X : ±0.5		X : ±2°	
	X.X : ±0.3		X.X : ±1°	
	X.XX : ±0.2			
CUSTOMER COPY				
TITLE: TF CARD 8P DIP 简易				
PART NO. 1060804A001				
DWN BROKEN 2020.8.20				
CHKD				
APVD				
SCALE 1:1				
UNIT: mm				
SIZE: A4				
SHEET: 10/1				
REV. B				

