

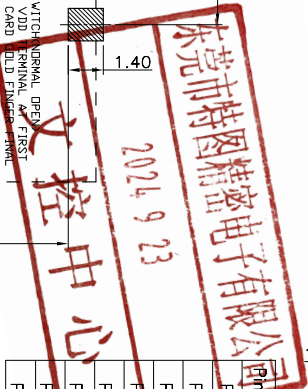
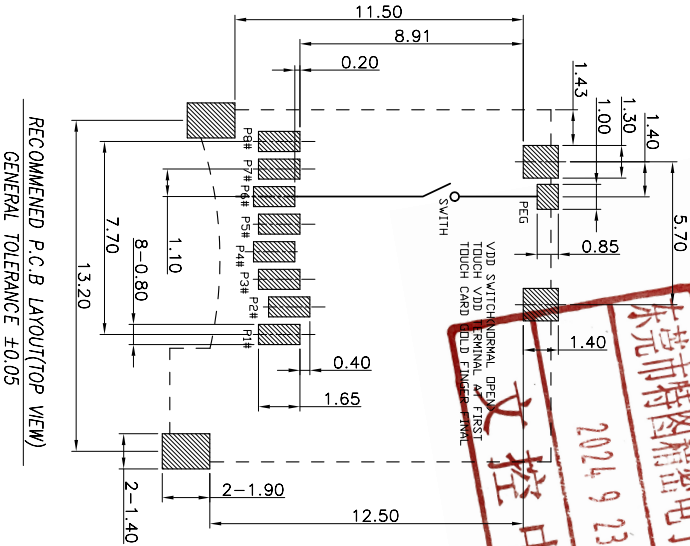
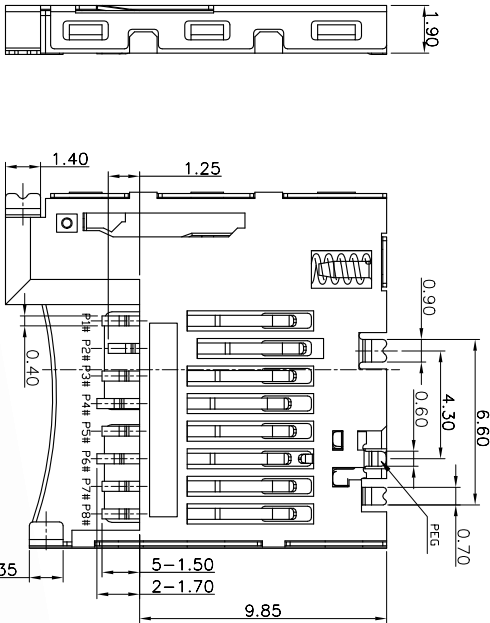


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

ROHS Compliant

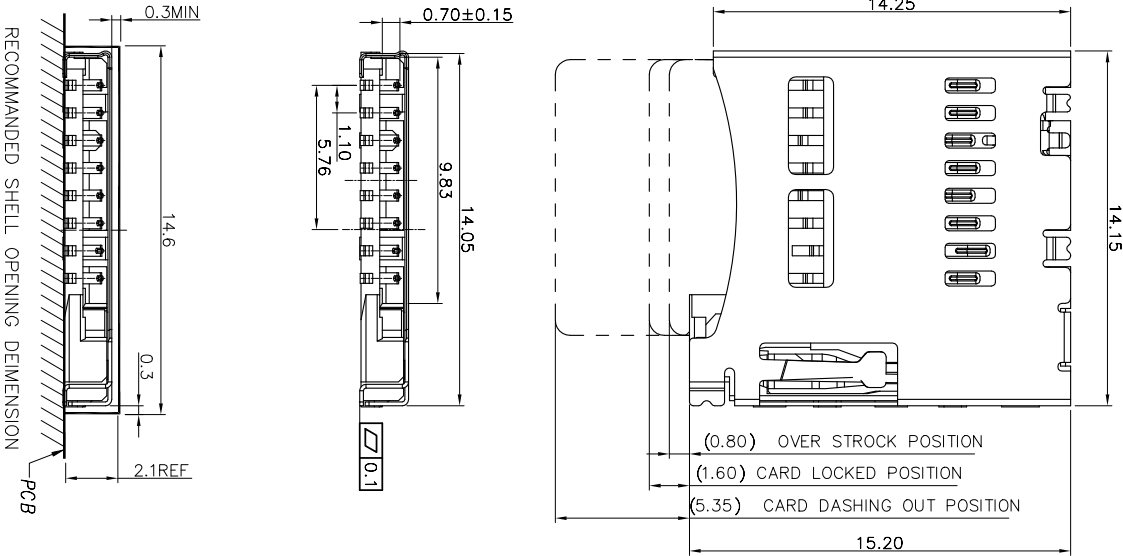

Pin No.	Pin assignment
PN1	DAT2
PN2	CD/DAT3
PN3	CMD
PN4	VDD
PN5	CLK
PN6	VSS
PN7	DATO
PN8	DAT1



NOTE:

- ELECTRICAL CHARACTERISTICS
- 1-1. VOLTAGE RATING: 10V DC.
- 1-2. CURRENT RATING: 0.5 A.
- 1-3. CONTACT RESISTANCE: 80 milliohms MAX.
- 1-4. INSULATION RESISTANCE: 1000 Megohms MIN.
- 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
2. MECHANICAL CHARACTERISTICS
- 2-1. CONTACT NORMAL FORCE: 0.3~0.9N/CONTACT.
- 2-2. DURABILITY: 5000 CYCLES.
3. SALT SPRAY: 24H.
4. OPERATING TEMPERATURE: -40C~85C.
5. ROHS 2011/65/EU COMPLIANT.
6. MPQ : 1000PCS/REEL.

REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
B	MODIFY	BROKEN	2012.10.13	
C	MODIFY	BROKEN	2022.12.21	
D	部分尺寸调整	ZHARKO	2024.09.02	

G	SPRING	1	SWP	
F	GUIDE PIN	1	SUS 304	
E	PEG	1	C5191	G/F plated on Solder foil 30u" MIN Ni underplated.
D	SLIDE	1	LCP EI30I	BLACK
C	SHELL	1	SUS 304	G/F plated on Solder foil 30u" MIN Ni underplated.
B	CONTACT	8	C5191	G/F plated on contact area G/F plated on Solder foil 30u" MIN Ni underplated.
A	HOUSING	1	LCP EI30I	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X :±0.5 X :±2°				
X.X :±0.3 X.X :±1°				
X.XX :±0.2				



TITLE: T-FLASH CONN PUSH TYP 带开型 1.9H

PART NO. 1060802GR002

DWN ZHARKO 2024.09.02

CHKD

APVD

SCALE 1:1 UNIT: mm

CUSTOMER COPY SIZE: A4 SHEET: 10F1 REV: D