
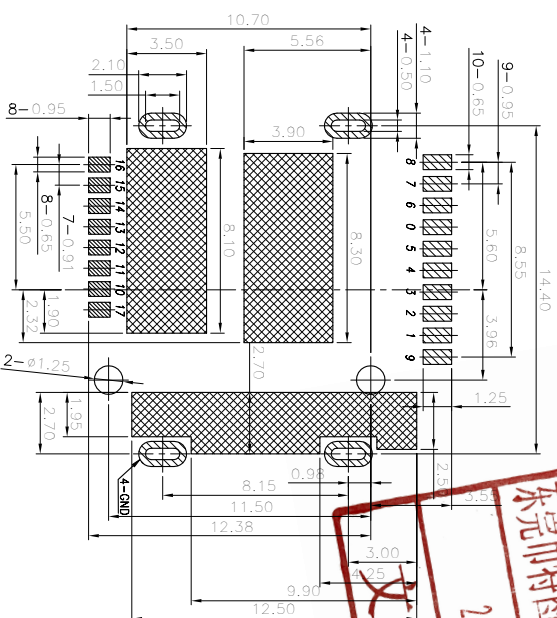
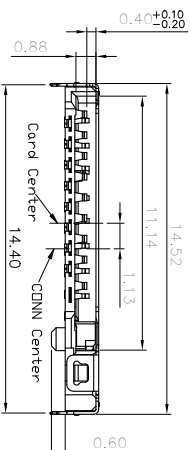
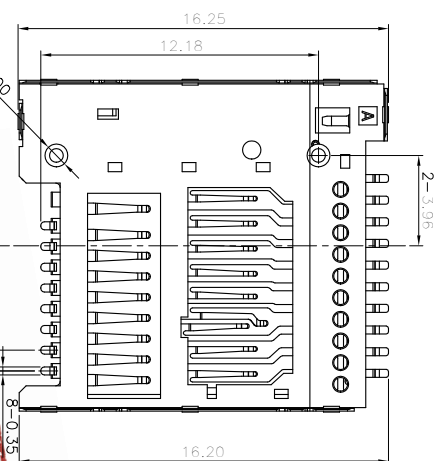
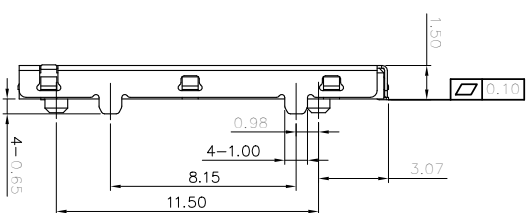


DAY
WEEK
YEAR

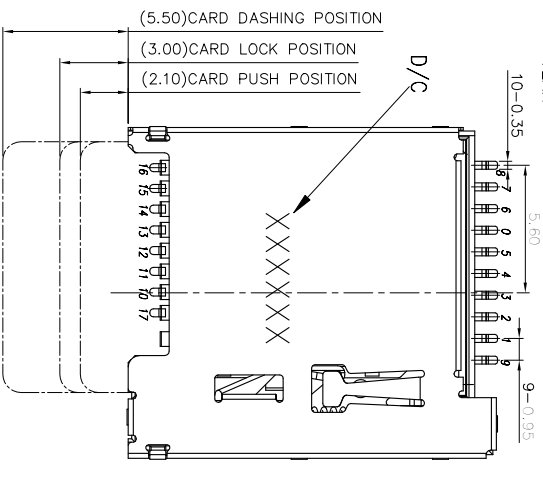

1. ELECTRICAL CHARACTERISTICS
- 1-1. VOLTAGE RATING: 10V DC.
- 1-2. CURRENT RATING: 0.5 A.
- 1-3. CONTACT RESISTANCE: 80 milliohms MAX.
- 1-4. INSULATION RESISTANCE: 1000 Megohms MIN.
- 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
FOR 1 MINUTE.
2. MECHANICAL CHARACTERISTICS
- 2-1. CONTACT NORMAL FORCE: 0.3~0.9N CONTACT.
- 2-2. DURABILITY: 5000 CYCLES.
3. SALT SPRAY: 24H.
4. OPERATING TEMPERATURE: -40°C~+85°C.
5. RoHS 2011/65/EU COMPLIANT.
6. MPQ : 800PCS/REEL.

 Solder Area
 Keep Out Area
 Component Outline

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	ZHARKO	2020.02.14

IO Pin	IO NO	Micro sd with UHS-II and swio support
		Name
		Type
		Description
P9	VDD2	S
P1	DA12	I/O
P2	CD/DAT3	I/O
P3	CMD	I/O
P4	VDD1	S
P5	CLK	I
P6	CD	
P7	VSS	S
P8	DAT0/RCCLK+	I/O
P17	DAT1/RCCLK-	I/O
P10	SWD	I
P11	VSS	S
P12	D0+	I/O
P13	D0-	I/O
P14	VSS	S
P15	D1+	I/O
P16	D1-	I/O
	VSS	S
GND		Supply voltage ground

F	SLIDER	1	HIGH-TEMPERATURE PLASTIC U94-10	BLACK
E	LINK	1	STAINLESS STEEL	
D	SPRING	1	SWP	
C	SHELL	1	STAINLESS STEEL	300" MIN IN PLATED OVERALL
B	CONTACT	18	COPPER ALLOY	1/2" MIN Gold plated on contact area 1/2" MIN Gold plated on Solder tail 500" MIN IN Unplated .
A	HOUSING	1	HIGH-TEMPERATURE PLASTIC U94-10	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE:		
DECIMALS:	ANGLES:	T-FLASH CARD 4.0版 自翻:SH 常开型		
X :±0.5	X :±2°	PART NO.	1061801AR001	
X.X :±0.3	X.X :±1°	DWN	ZHAKRO 2020.02.14	
X.XX :±0.2		CHRD		
		APVD		
		SCALE 1:1	UNIT: mm	
		CUSTOMER COPY	SIZE: A4	SHEET: 10F1
				REV: A

Testuili

TETULL CORPORATION