
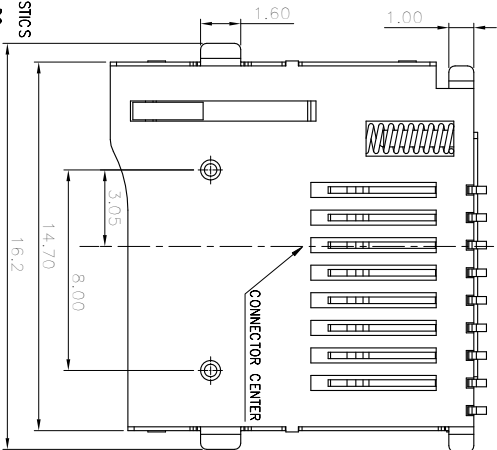

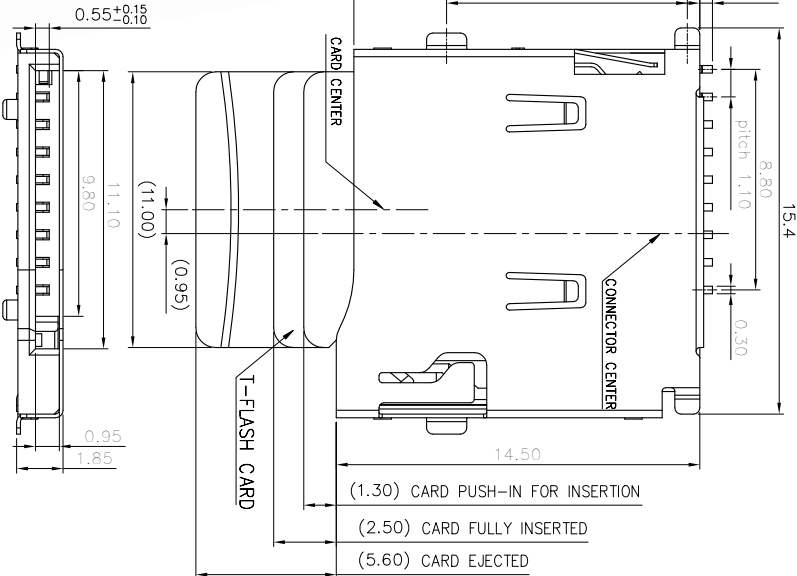
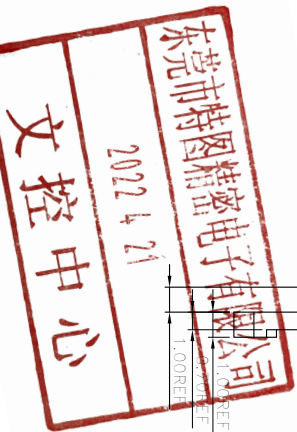


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

ROHS Compliant

Pin No.	Pin assignment
1	DAT2
2	CD/DAT3
3	CMD
4	VDD
5	CLK
6	VSS
7	DAT0
8	DAT1
CD	CARD DETECTION
G	GROUND

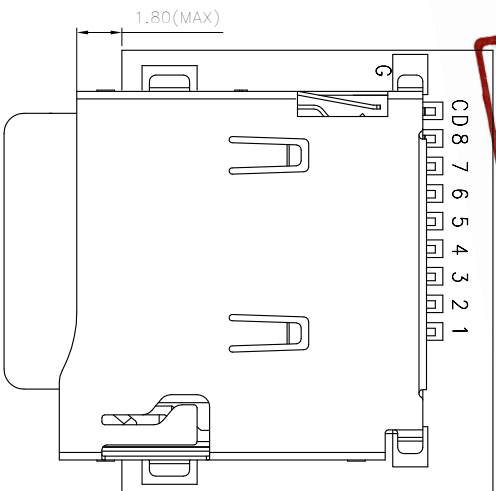



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	TOM	2009.03.29
B	MODIFY	BROKEN	2012.03.01

NOTE:

1. ELECTRICAL CHARACTERISTICS
- 1-1. VOLTAGE RATING: 10V DC.
- 1-2. CURRENT RATING: 0.5 A.
- 1-3. CONTACT RESISTANCE: 80 milliohms MAX.
- 1-4. INSULATION RESISTANCE: 1000 Megohms MIN.
- 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.

P/N	FINISH
1 1060802AR013	Gold plated all over
2 1060802AR003	Gold plated on contact area Tin plated on Solder tail

2. MECHANICAL CHARACTERISTICS
- 2-1. CONTACT NORMAL FORCE: 0.3~0.9N CONTACT.
- 2-2. DURABILITY: 5000 CYCLES.
3. SALT SPRAY: 24H.
4. OPERATING TEMPERATURE: -40C~85C.
5. RoHS 2002/95/EC COMPLIANT.
6. MPQ : 1000PCS/REEL.

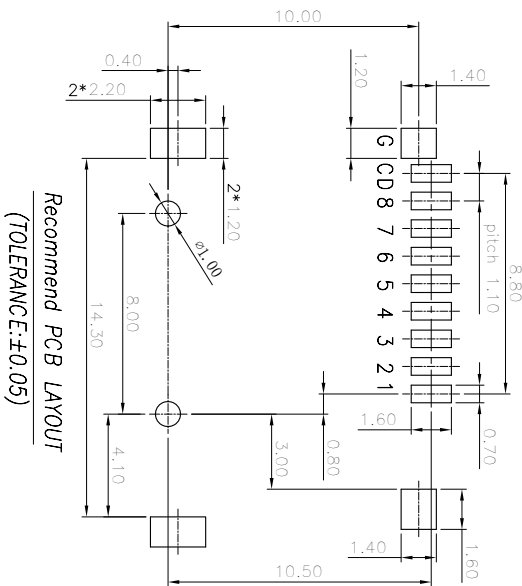

Recommend PCB LAYOUT
(TOLERANCE: ±0.05)

F	SLIDER	1	HIGH-TEMPERATURE PLASTIC UL94-V0	BLACK
E	LINK	1	STAINLESS STEEL	
D	SPRING	1	SMP	
C	SHELL	1	STAINLESS STEEL 0.15t	NI PLATING
B	CONTACT	9	COPPER ALLOY 0.15t	See Table All over Nickel Plated .
A	HOUSING	1	HIGH-TEMPERATURE PLASTIC UL94-V0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X .±0.5	X .±2°			
X.X .±0.3	X.X .±1°			
X.XX .±0.2				



TITLE:	T-FLASH CONN PUSH TYP 1.8t
PART NO.	1060802AR0X3
DWN	BROKEN
CHKD	2012.03.01
APVD	
SCALE 1:1	UNIT: mm
CUSTOMER COPY	SIZE: A4 SHEET: 10F1 REV: B