

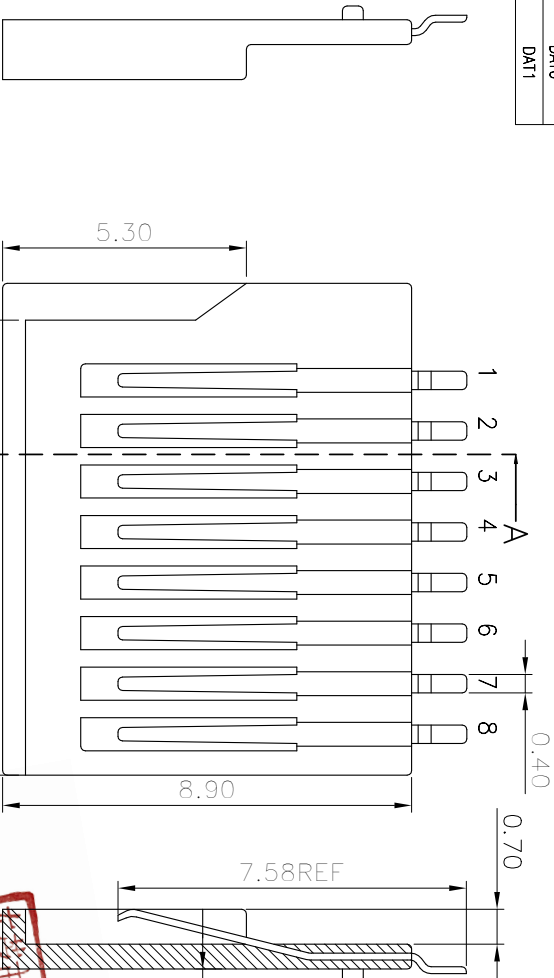


Pin No.	Pin assignment
1	DAT2
2	CD/DAT3
3	CMO
4	VDD
5	CLK
6	VSS
7	DAT0
8	DAT1

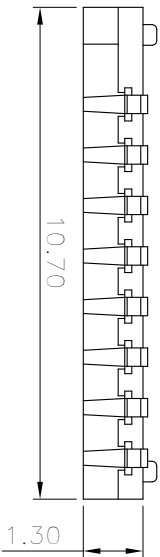


SECTION A-A

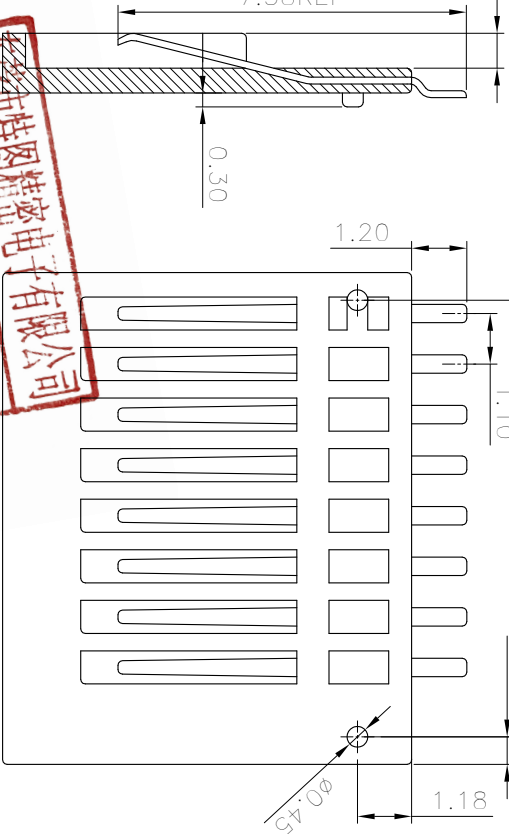

NOTE:

- ELECTRICAL CHARACTERISTICS
 - VOLTAGE RATING: 10V DC.
 - CURRENT RATING: 0.5 A.
 - CONTACT RESISTANCE: 80 milliohms MAX.
 - INSULATION RESISTANCE: 1000 Megohms MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
- MECHANICAL CHARACTERISTICS
 - CONTACT NORMAL FORCE:0.3~0.9N CONTACT.
 - DURIBILITY:5000 CYCLES.
 - SALT SPRAY: 24H.
 - OPERATING TEMPERATURE:-40℃~85℃.
 - RoHS 2002/95/EC COMPLIANT.

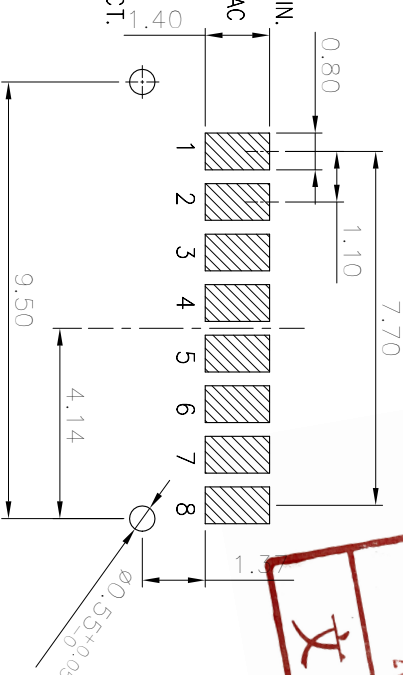

Recommend PCB LAYOUT
(TOLERANCE:±0.05)

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	JAMES	2008.03.29
B	MODIFY	BROKEN	2010.04.21

P/NO.	PACKING
1060803PT002	50PCS/BAG
1060803AR006	1800PCS/REEL

2022 4 21

文控中心

TABLE:

B	CONTACT	8	COPPER ALLOY 0.15t	Tin plated on Solder tail All over Nickel Plated .
A	HOUSING	1	HIGH-TEMPERATURE PLASTIC UL94-V0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	



TITLE:
T-FLASH CONN SIMPLE SOCKET

PART NO.	1060803PT002&AR006
DWN	BROEKEN
CHKD	2010.04.21
APVD	

SCALE	1:1
UNIT	mm
CUSTOMER COPY	
SIZE	A4
SHEET	10F1
REV.	B