
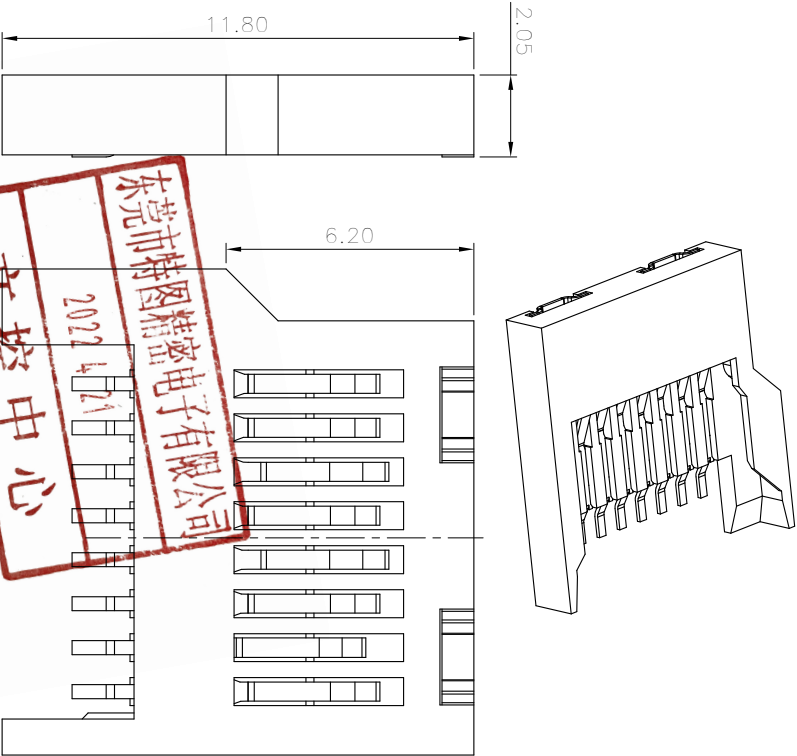


ROHS Compliant


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

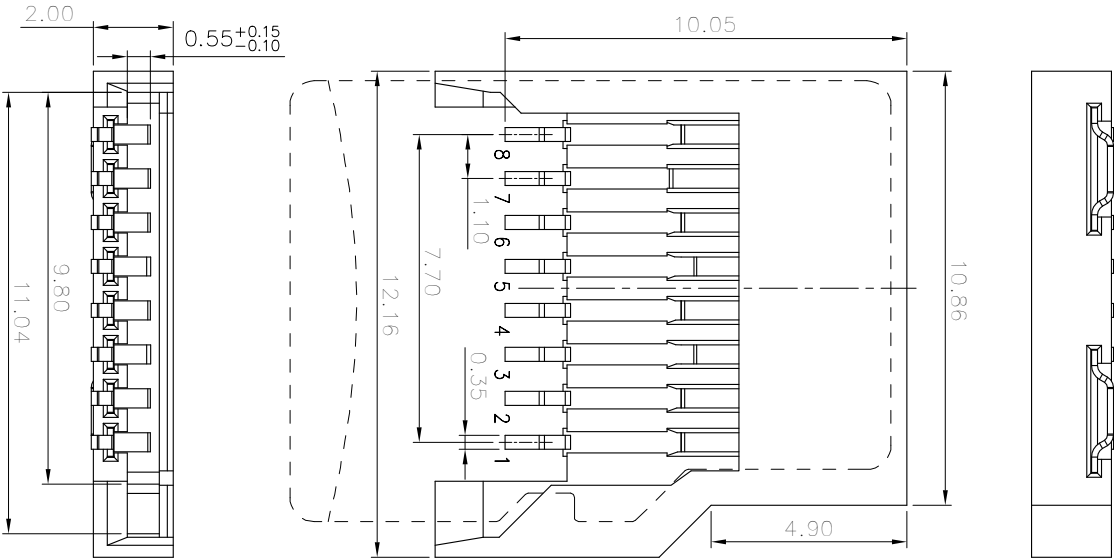

NOTE:

1. ELECTRICAL CHARACTERISTICS

- 1-1. VOLTAGE RATING: 10V DC.
- 1-2. CURRENT RATING: 0.5 A.
- 1-3. CONTACT RESISTANCE: 80 milliohms MAX.
- 1-4. INSULATION RESISTANCE: 1000 Megohms MIN.
- 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
- 2. MECHANICAL CHARACTERISTICS
- 2-1. RETENTION FORCE: 100gf MIN./PIN.
- 2-2. DURABILITY: 5000 CYCLES.
- 3. SALT SPRAY: 24H.
- 4. OPERATING TEMPERATURE: -40°C~85°C.
- 5. RoHS 2002/95/EC COMPLIANT.
- 6. MPQ : 1500PCS/REEL.

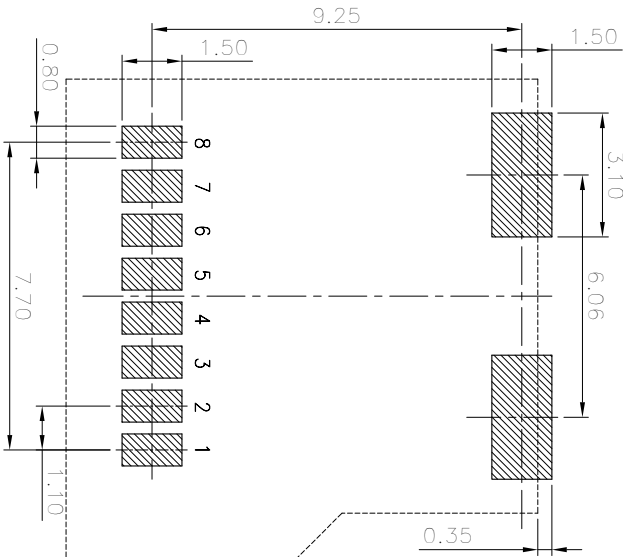

REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PRODUCT	RELEASE	JAMES	2008.03.29
B	MODIFY	BROKEN	2014.07.14	

Pin No.	Pin assignment	Pin No.	Pin assignment
1	DAT2	6	VSS
2	CD/DAT3	7	DAT0
3	CMD	8	DAT1
4	VDD	Cd	CARD DETECTION
5	CLK	G	GROUND

C	GND	2	COPPER ALLOY	Tin plated all over.
B	CONTACT	8	COPPER ALLOY	Gold Finish On Contact Area
A	HOUSING			Gold plated on Solder tail
NO	DESCRIPTION	1	HIGH-TEMPERATURE PLASTIC UL94-V0	All over Nickel Plated .

QTY	MATERIAL	PLATING & COLOR
1	HIGH-TEMPERATURE PLASTIC UL94-V0	BLACK

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	

TITLE: T-FLASH CONN SIMPLE PLASTIC	
PART NO.	1060803PT003
DWN	BROKEN
CHKD	2014.07.14
APVD	
SCALE 1:1	UNIT: mm
CUSTOMER COPY	SHEET: 10F1
SIZE: A4	REV: B