
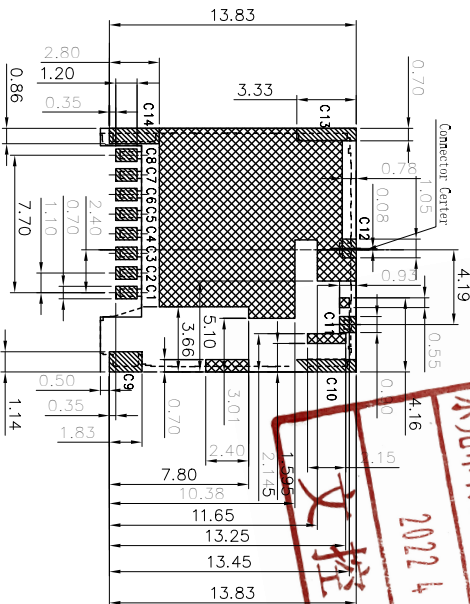
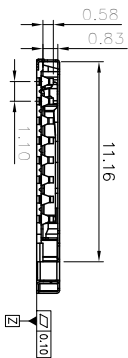
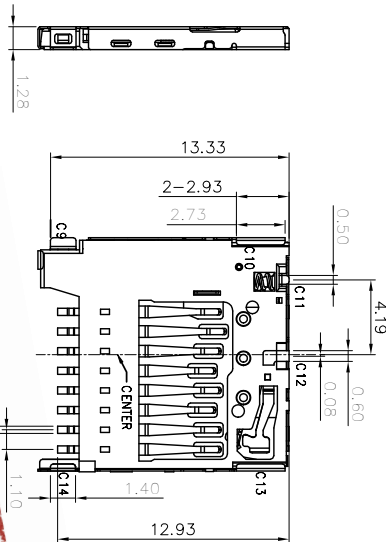


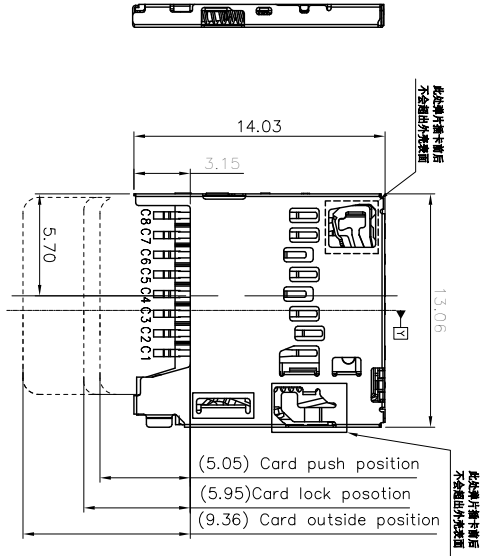

 PAD AREA


 PATTERN PROHIBITION AREA

Pin No.	Pin assignment	Pin No.	Pin assignment
C1	DA12	C8	DA11
C2	C/D/DA13	C9	GROUND
C3	CMD	C10	GROUND
C4	VDD	C11	DETECT LEVER
C5	CLK	C12	DETECT LEVER
C6	VSS	C13	GROUND
C7	DA10	C14	GROUND

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	TOM	2019.03.22
B	MODIFY	BROKEN	2020.10.15

SPECIFICATIONS:

- 1. ELECTRICAL CHARACTERISTICS
 - 1-1. CONTACT RESISTANCE: 80 milliohms MAX.
 - 1-2. INSULATION RESISTANCE: 1,000 Megohms MIN.
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
- 2. MECHANICAL CHARACTERISTICS
 - 2-1. RETENTION FORCE/MIN: 1000g/PIN
 - 2-2. DURABILITY: 5,000 CYCLES
- 3. RoHS 2002/95/EC COMPLIANT.
- 4. PACKING NUMBER: 2400PCS/REEL

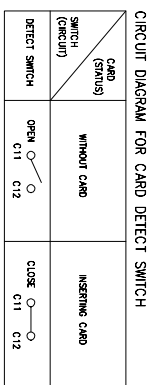

F	SLIDER	1	HIGH-TEMPERATURE PLASTIC U94-100	BLACK
E	LINK	1	STAINLESS STEEL	
D	SPRING	1	SMP	
C	SHELL	1	SUS301 0.15t	AU/Ni PLATING
B	CONTACT	8	C5210 0.15t	Gold plated on contact area Gold plated on Solder tail All over Nickel Plated .
A	HOUSING	1	HIGH-TEMPERATURE PLASTIC U94-100	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:	ANGLES:			
X :±0.5	X :±2°			
X.X :±0.3	X.X :±1°			
X.XX :±0.2				
  RETULL				
TITLE: T-FLASH PUSH TYPE				
PART NO. 10608054R002				
DWN BROKEN 2020.10.15				
CHKD				
APVD				
SCALE 1:1				
UNIT: mm				
CUSTOMER COPY				
SIZE: A4				
SHEET: 10 of 1				
REV: B				