
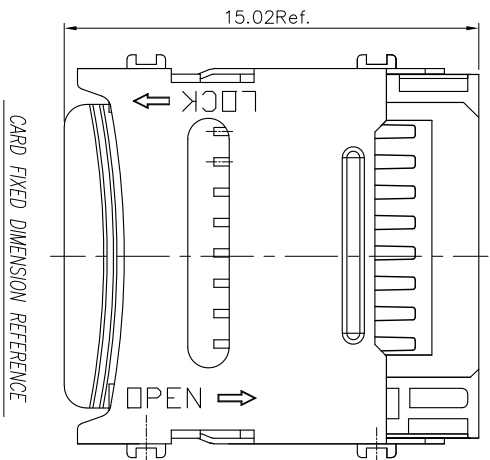
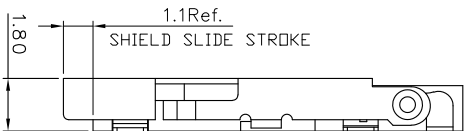



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	BROKEN	2015.09.28
B	MODIFY	BROKEN	2023.09.26

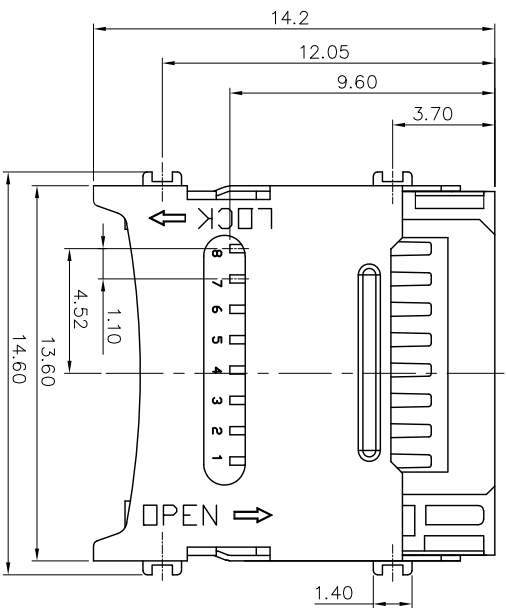


CARD FIXED DIMENSION REFERENCE

NOTE:

1. ELECTRICAL CHARACTERISTICS
- 1-1. VOLTAGE RATING: 10V DC.
- 1-2. CURRENT RATING: 0.5 A.
- 1-3. CONTACT RESISTANCE: 80 milliohms MAX.
- 1-4. INSULATION RESISTANCE: 1000 Megohms MIN.
- 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
2. MECHANICAL CHARACTERISTICS
- 2-1. CONTACT NORMAL FORCE: 0.3~0.9N CONTACT.
- 2-2. DURABILITY: 5000 CYCLES.
3. SALT SPRAY: 24H.
4. OPERATING TEMPERATURE: -40°C~85°C.
5. RoHS 2011/65/EU COMPLIANT.
6. MPQ : 1000PCS/RELL.

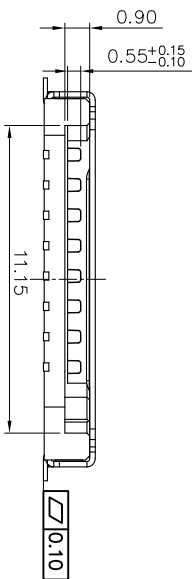

Pin No.	Pin assignment	Pin No.	Pin assignment
1	DAT2	6	VSS
2	CD/DAT3	7	DAT0
3	CMD	8	DAT1
4	VDD	Cd	
5	CLK	G	

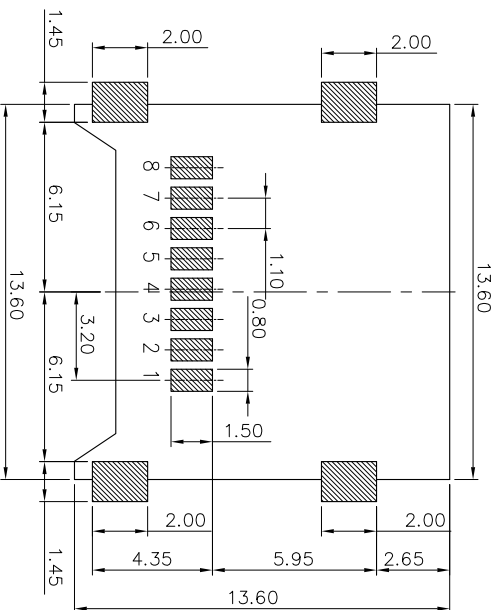

Recommend PCB LAYOUT
(TOLERANCE: ±0.05)

C	SHELL	1	SUS 201	Ni PLATING
B	CONTACT	8	C2680	Gold flash On Contact Area Tin plated on Solder toll All over Nickel Plated .
A	HOUSING	1	LCP	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X : ±0.5 X : ±2°				
XX : ±0.3 XX : ±1°				
XXX : ±0.2				
TITLE: T-FLASH CONN HING TYP 1.8H				
PART NO. 1060801GR204				
DWV BROKEN 2023.09.26				
CHKD				
APVD				
SCALE 1:1				
UNIT: mm				
CUSTOMER COPY				
SIZE: A4				
SHEET: 10F1				
REV: B				

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

ROHS Compliant