

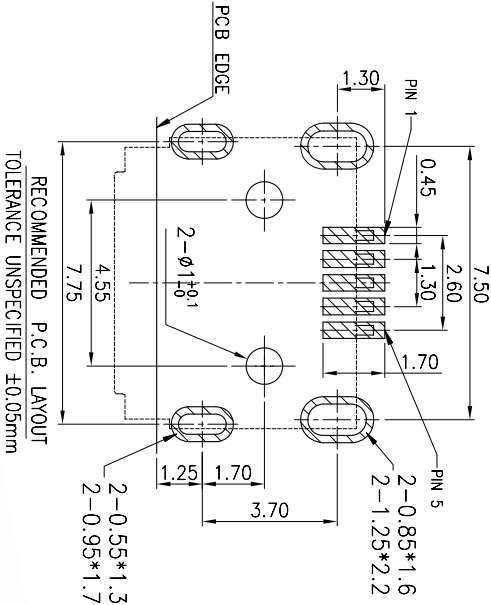
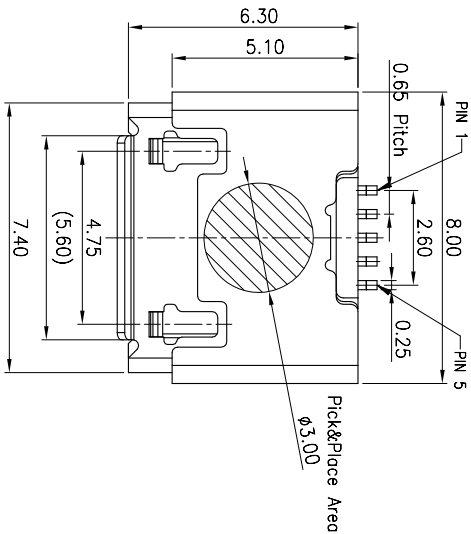


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.


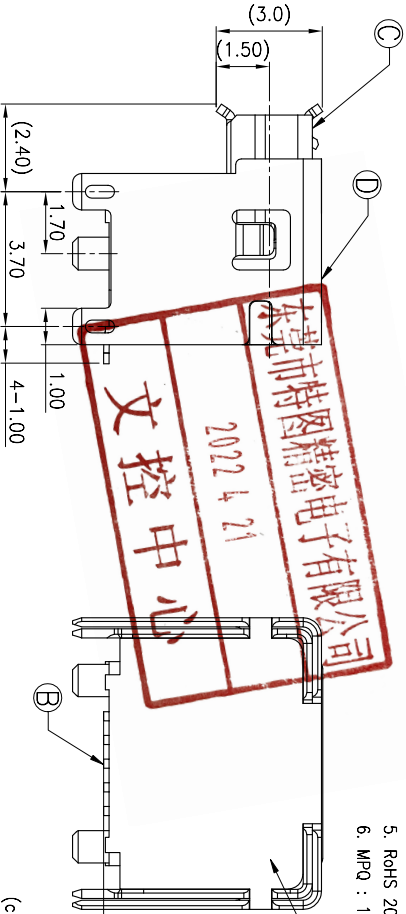


RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

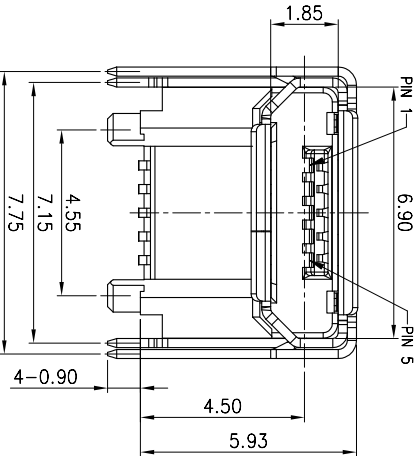

(coplanarity 0.1mm MAX.
Before, during and after Reflow)

5	GND
4	ID
3	D+
2	D-
1	VBUS
PIN	NAME

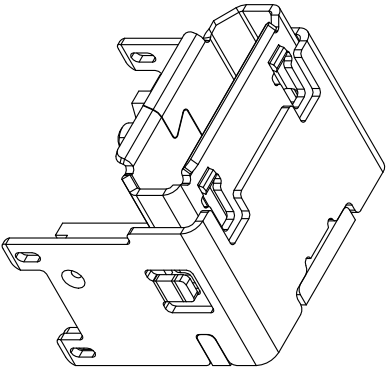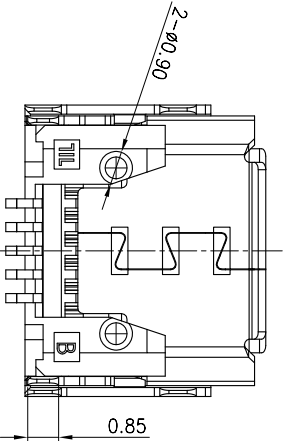

REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PRODUCT	RELEASE	JAMES	2016.04.13
B	MODIFY		BROKEN	2019.07.27

NOTE:

1. ELECTRICAL CHARACTERISTICS
- 1-1. VOLTAGE RATING:30V AC
- 1-2. CURRENT RATING:2.0A (pin1,5);0.5A (pin2,3,4)
- 1-3. CONTACT RESISTANCE: 50 milliohms MAX.
- 1-4. INSULATION RESISTANCE: 100 Megohms MIN.
- 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 250V AC

FOR 1 MINUTE.

2. MECHANICAL CHARACTERISTICS
- 2-1. MATING&UNMATING FORCE: 0.8kgf~3.5kgf
- 2-2. DURABILITY:5000CYCLES
3. SALT SPRAY: 24H
4. OPERATING TEMPERATURE:-40C~85C
5. RoHS 2002/95/EC COMPLIANT.
6. MPQ : 1000PCS/REEL.

D	COVER	1	STAINLESS STEEL 0.25t	NI PLATING
C	SHIELD	1	STAINLESS STEEL 0.25t	NI PLATING
B	CONTACT	5	COPPER ALLOY 0.15t	Tu Gold On Contact Area Tin plated on Solder toll All over Nickel Plated.
A	HOUSING	1	THERMOPLASTIC U94-40	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:	ANGLES:			
X :±0.5	X :±2°			
X.X :±0.3	X.X :±1°			
X.XX :±0.2				



TITLE: Micro USB CONNECTOR
DIP TYPE(垂直双壳)

PART NO. 1030554R002

DWN BROKEN 2019.07.27

CHKD

APVD

SCALE 1:1

CUSTOMER COPY SIZE: A4

SHEET: 10F1

TETULL CORPORATION