ROHS Com

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

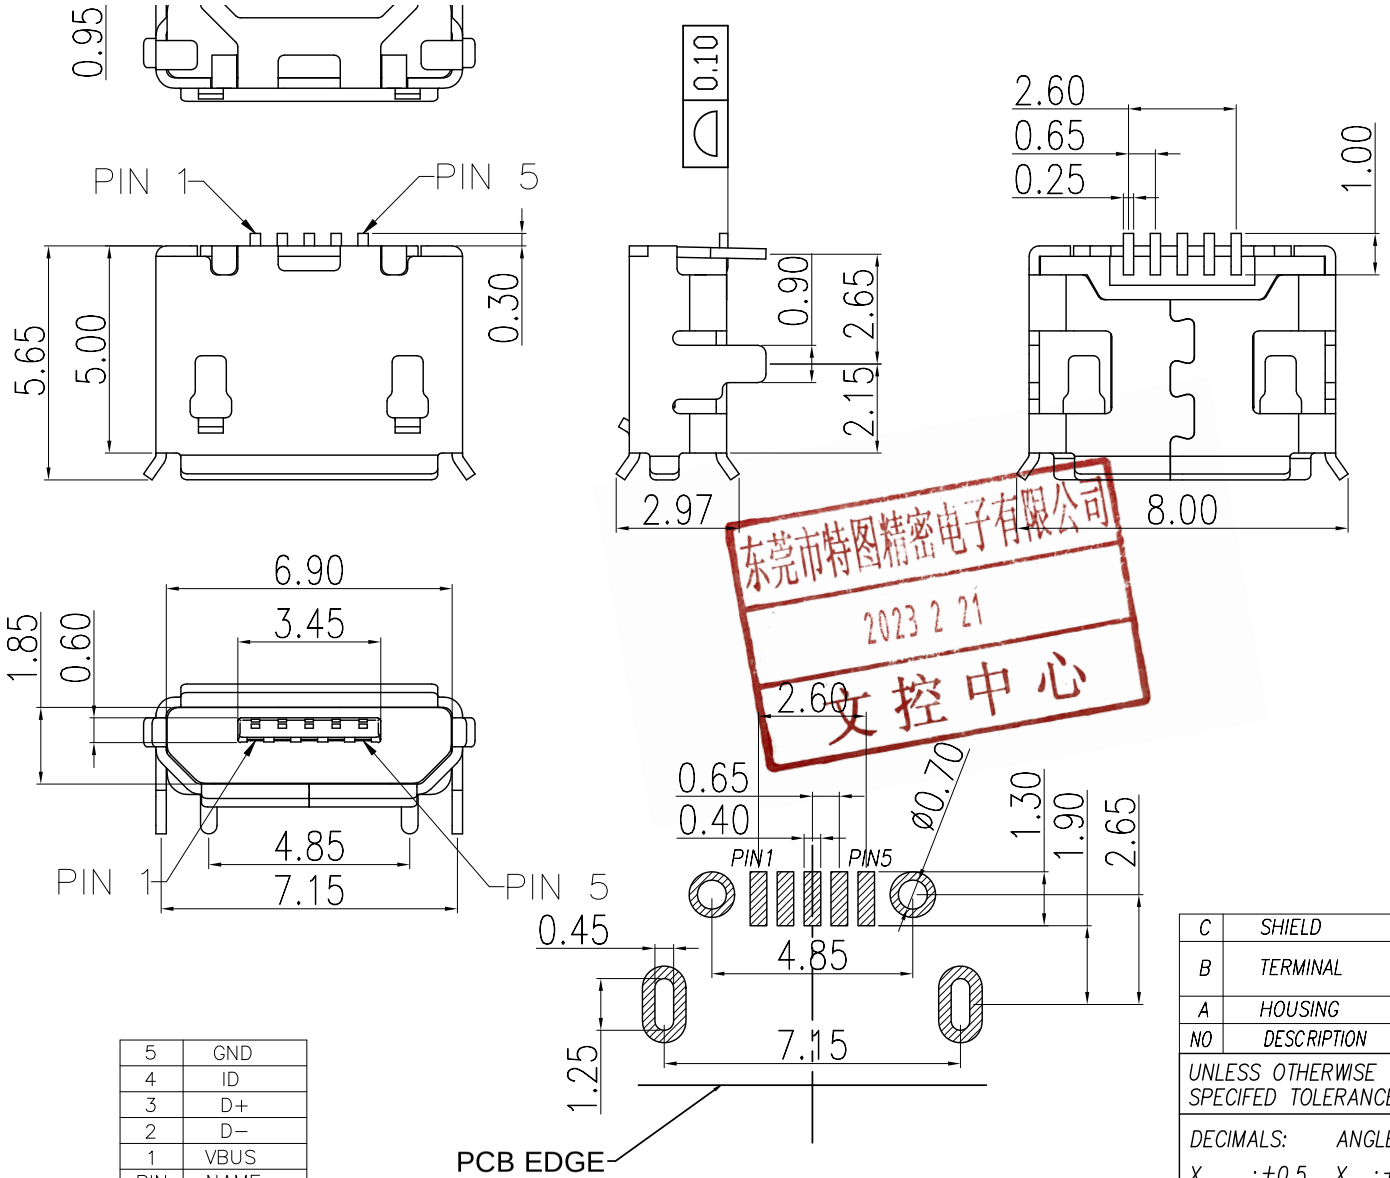

东莞市特图精密电子有限公司
2023 2 21
文控中心

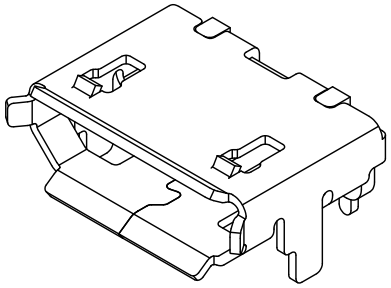

NOTE:

1. ELECTRICAL CHARACTERISTICS
   1-1. VOLTAGE RATING:30V AC
   1-2. CURRENT RATING:2.0A (pin1,5);0.5A (pin2,3,4)
   1-3. CONTACT RESISTANCE: 50 milliohms MAX.
   1-4. INSULATION RESISTANCE: 100 Megohms MIN.
   1-5. DIELECTRIC WITHSTANDING VOLTAGE: 250V AC FOR 1 MINUTE.
2. MECHANICAL CHARACTERISTICS
   2-1. MATING&UNMATING FORCE: 0.8kgf~3.5kgf
   2-2. DURIBILITY:5000CYCLES
3. SALT SPRAY: 24H
4. OPERATING TEMPERATURE:-40°C~85°C
5. RoHS 2002/95/EC COMPLIANT.
6. MPQ : 1500PCS/REEL

PIN	NAME
5	GND
4	ID
3	D+
2	D-
1	VBUS

PIN ASSIGNMENT

RECOMMENDED PCB LAYOUT(TOP VIEW)
GENERAL TOLERANCES:±0.05

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
C	SHIELD	1	COPPER ALLOY	Ni PLATING
B	TERMINAL	5	COPPER ALLOY	Gold Flash On Contact Area Gold Flash On Solder tail All over Nickel Plated .
A	HOUSING	1	THERMOPLASTIC UL94-V0	BLACK

UNLESS OTHERWISE SPECIFED TOLERANCES

DECIMALS:
X :±0.5
X.X :±0.3
X.XX :±0.2

ANGLES:
X :±2°
X.X :±1°

TETULL

TITLE: MICRO USB 5P SMT四脚插板 牛角4.85 无柱卷边

PART NO.	1030550AR112	
DWN	BROKEN	2023.02.06
CHKD		
APVD		
SCALE 1:1	UNIT: mm	
CUSTOMER COPY	SIZE: A4	SHEET: 1OF1	REV: B

TETULL

TETULL CORPORATION