

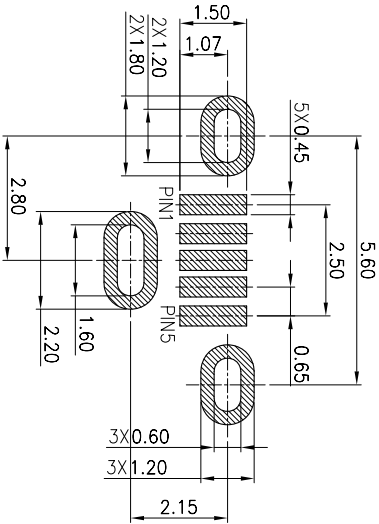
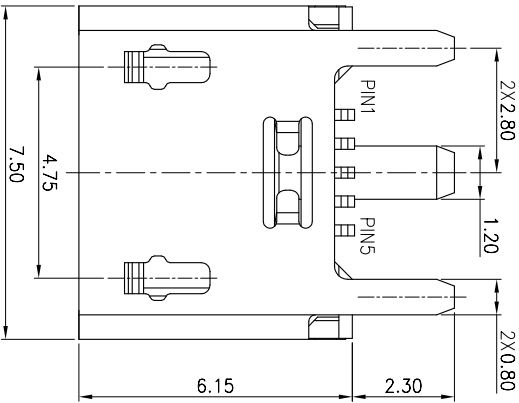
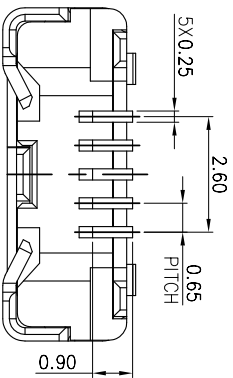


ROHS Compliant

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.


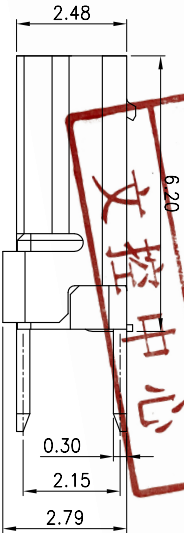


RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

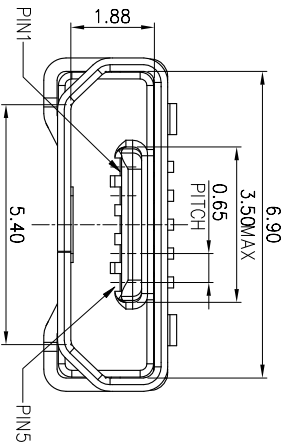

5	GND
4	ID
3	D+
2	D-
1	VBUS
PIN	NAME
PIN	ASSIGNMENT

CAP DIMENSION SKETCH MAP

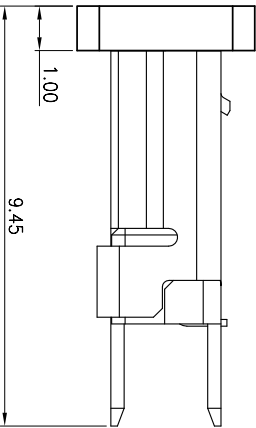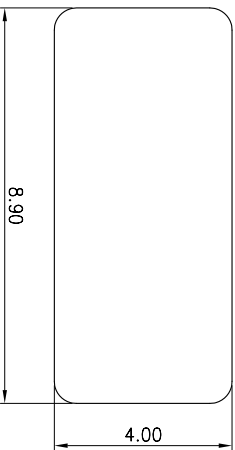

REV	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PRODUCT	RELEASE	TOM	2016.09.25
B	MODIFY		BROKEN	2019.07.30
C	MODIFY		BROKEN	2021.03.22

- SPECIFICATION:
- ELECTRICAL:
 - VOLTAGE RATING: 30VAC RMS,
 - CURRENT RATING: 2.0 A(pin1,5);0.5 A(pin2,3,4)
 - CONTACT RESISTANCE: 50 MILLIOHMS MAX;
 - INSULATION RESISTANCE: 100 MEGOHMS MIN
 - DIELECTRIC WITHSTANDING VOLTAGE: 250V AC FOR 1MINUTE
 - MECHANICAL:
 - OPERATING LIFE: 5000 CYCLES
 - ENVIRONMENTAL:
 - OPERATING TEMPERATURE: -40°C TO 85°C.
 - PACKING NUMBER : 600PCS/REEL

C	SHIELD	1	STAINLESS STEEL 0.30T	N/ PLATED
B	TERMINAL	5	COPPER ALLOY 0.15T	Gold Fresh On Contact Area Tin Plated on Solder tail All over Nickel Plated .
A	HOUSING	1	THERMOPLASTIC UL94-V0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:	ANGLES:			
X : ±0.5	X : ±2°			
X.X : ±0.3	X.X : ±1°			
X.XX : ±0.2				
				
CUSTOMER COPY		TITLE: Micro usb B 5P DIP+SMT TYPE		
		PART NO.	1030560AR002	
		DWG	BROKEN 2021.03.22	
		CHKD		
		APVD		
		SCALE 1:1		
		UNIT: mm		
		SHEET: 10F1		
		REV: C		

