
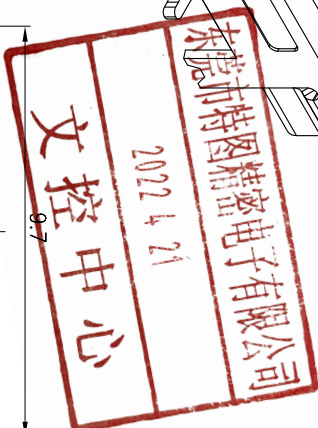
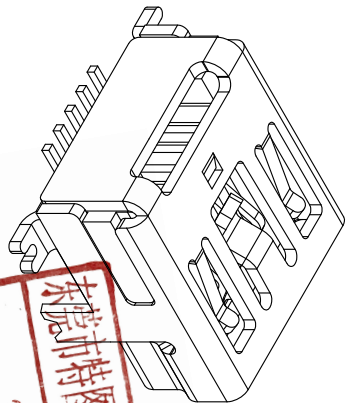
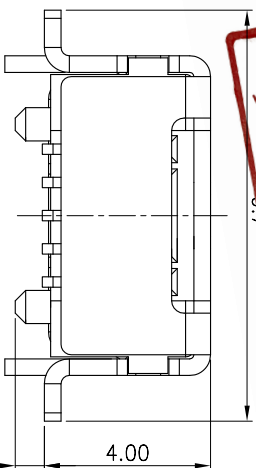
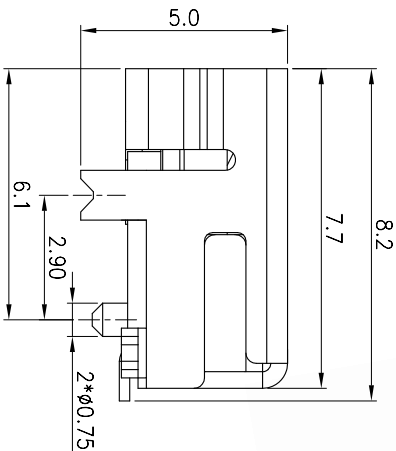


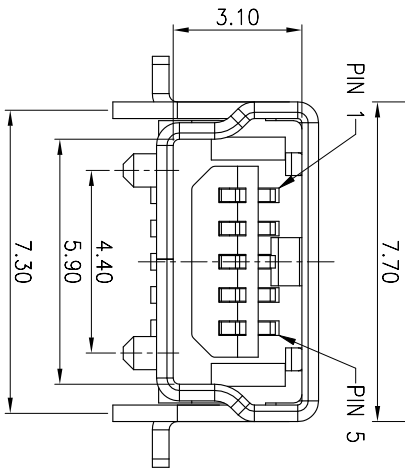

1. ELECTRICAL CHARACTERISTICS
- 1-1. VOLTAGE RATING: 30V AC
- 1-2. CURRENT RATING: 1.0A
- 1-3. CONTACT RESISTANCE: 50 milliohms MAX.
- 1-4. INSULATION RESISTANCE: 100 Megohms MIN.
- 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
FOR 1 MINUTE.
2. MECHANICAL CHARACTERISTICS
- 2-1. MATING&UNMATING FORCE: 0.7kgf~3.5kgf
- 2-2. DURABILITY: 5000 CYCLES
3. SALT SPRAY: 24H
4. OPERATING TEMPERATURE: -40°C~85°C
5. RoHS 2002/95/EC COMPLIANT.
6. MPQ : 700PCS/REEL.

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	JAMES	2015.09.25

SHELL	SHIELD
5	GND
4	ID
3	D+
2	D-
1	VBUS
PIN	NAME
PIN	ASSIGNMENT

C	SHIELD	1	COPPER ALLOY	Ni&Tin PLATED
B	TERMINAL	5	COPPER ALLOY	Gold Flash On Contact Area Tin plated on Solder tail All over Nickel Plated .
A	HOUSING	1	THERMOPLASTIC UH4-10	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:		ANGLES:		
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
				
				
TITLE: Mini usb FM 5P DIP+SMT TYPE				
PART NO.		1030502AR004		
DWN		JAMES		
CHKD		2015.09.29		
APVD				
SCALE 1:1		UNIT: mm		
CUSTOMER COPY				
SIZE: A4		SHEET: 10/1		
		REV: A		

