
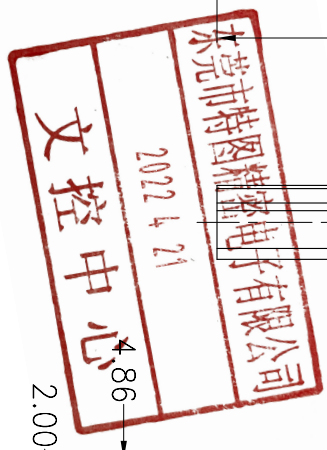



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

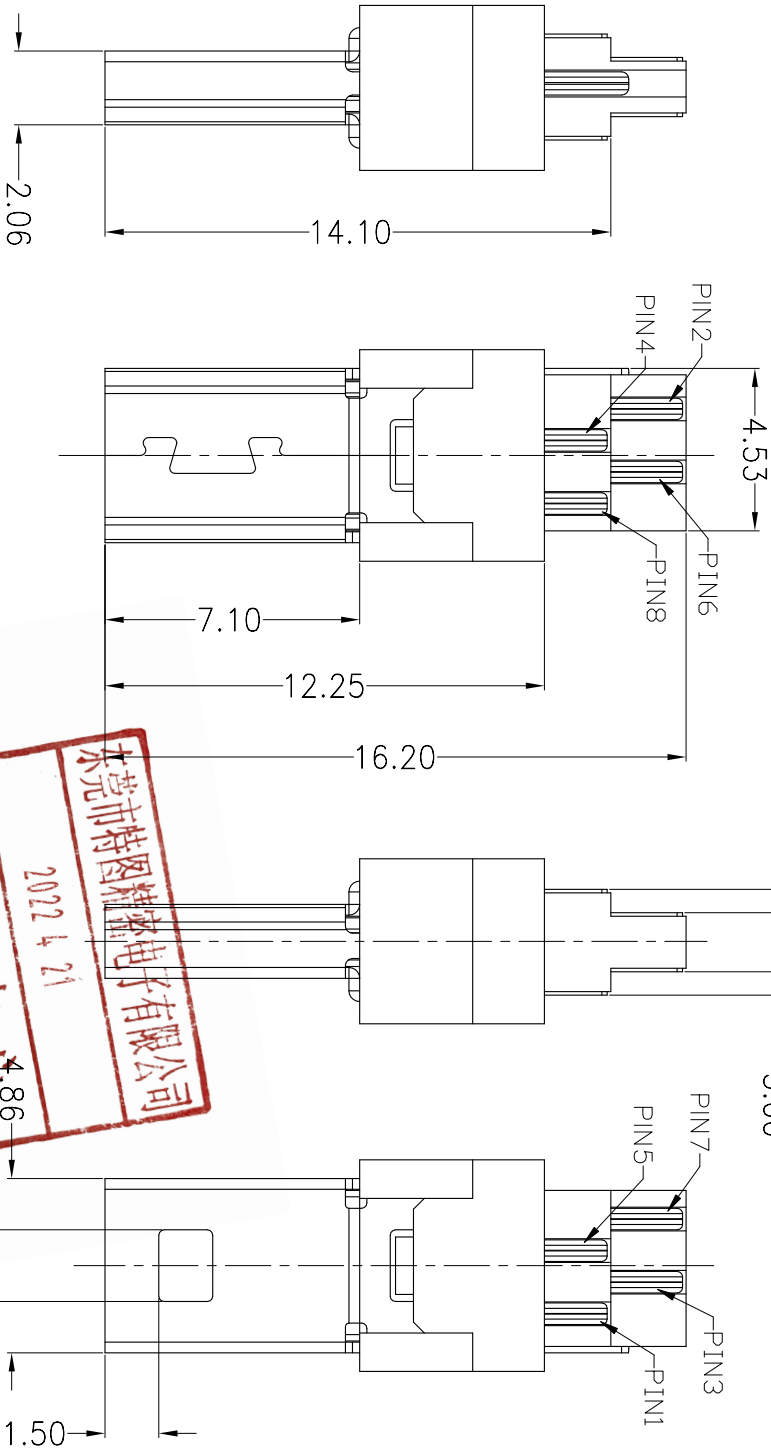

REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	ARES	2017.09.25	
B	MODIFY	BROKEN	2020.06.18	

NOTE:

- ELECTRICAL CHARACTERISTICS
 - VOLTAGE RATING: 30V AC
 - CURRENT RATING: 1.0A
 - CONTACT RESISTANCE: 50 milliohms MAX.
 - INSULATION RESISTANCE: 100 Megohms MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE: 250V AC FOR 1 MINUTE.
- MECHANICAL CHARACTERISTICS
 - MATING&UNMATING FORCE: 0.5kgf~3.5kgf
 - DURABILITY: 5000 CYCLES
 - SALT SPRAY: 24H
 - OPERATING TEMPERATURE: -40°C~85°C
 - RoHS 2002/95/EC COMPLAINT.
 - MPQ : 1000PCS/BAG.

TABLE:

1030801AP001	SPCC 0.30T
1030801AP002	COPPER ALLOY 0.30T
P/N	SHIELD

D	SHIELD	1	SEE TABLE	Ni PLATED
C	TERMINAL	8	COPPER ALLOY 0.20T	Gold flash on contact area Tin plated on Solder tail All over Nickel Plated .
B	COVER	1	THERMOPLASTIC UL94-V0	BLACK
A	HOUSING	1	THERMOPLASTIC UL94-V0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X : ±0.5 X : ±2°				
X.X : ±0.3 X.X : ±1°				
X.XX : ±0.2				
TITLE: MINI USB 8P公头焊线式				
PART NO. 1030801AP00X				
DWG ARES 2020.06.18				
CHKD				
APVD				
SCALE 1:1 UNIT: mm				
CUSTOMER COPY SIZE: A4 SHEET: 10F1 REV. B				

