

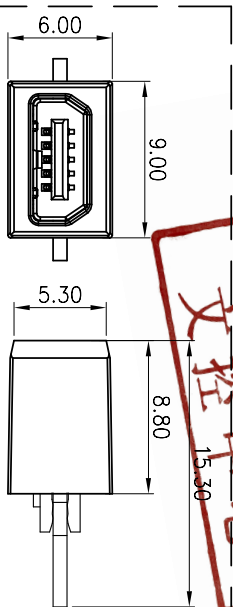
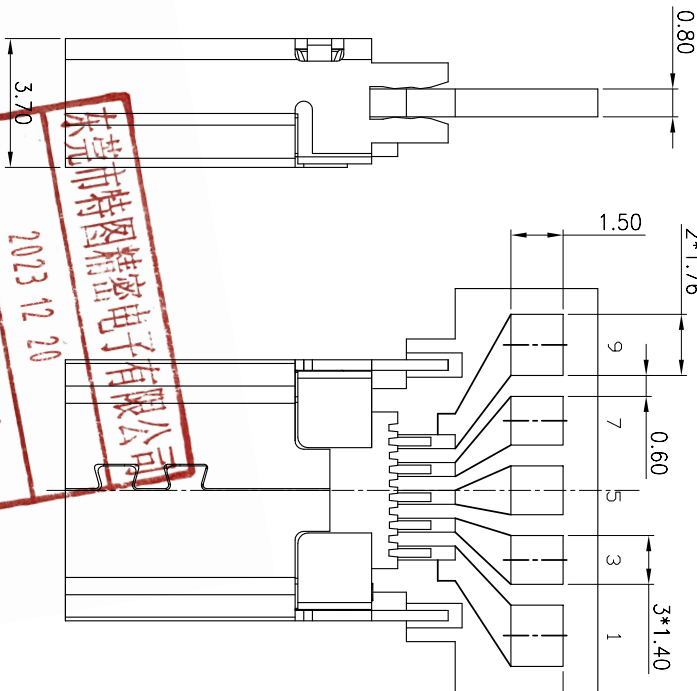
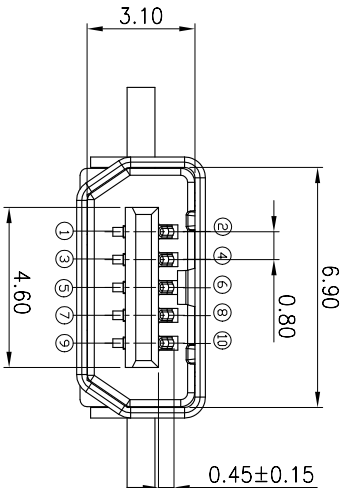


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

ROHS Compliant

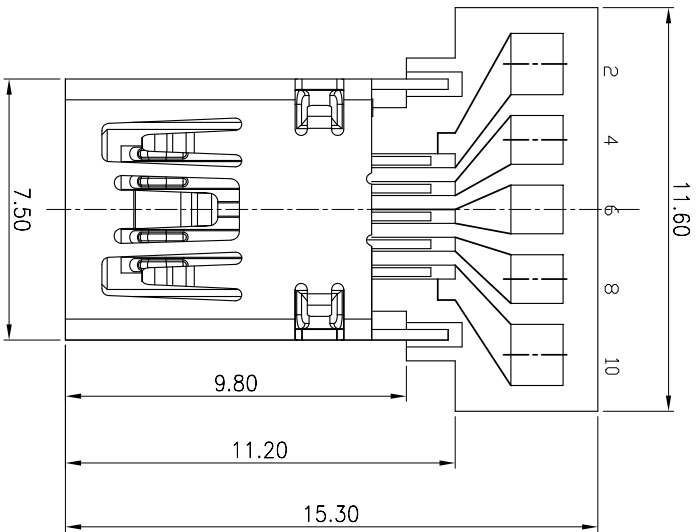

推荐护套装配示意图
SCALE 1:2

护套 P/N:2031003AP001

- NOTE:
- ELECTRICAL CHARACTERISTICS
1-1. VOLTAGE RATING:30V AC
1-2. CURRENT RATING:20A
1-3. CONTACT RESISTANCE: 50 milliohms MAX.
1-4. INSULATION RESISTANCE: 100 Megohms MIN.
1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
FDR 1 MINUTE.
 - MECHANICAL CHARACTERISTICS
2-1. Mating FORCE: 35N Max
2-2. Umating FORCE: 7N Min(Initial)
2-3. DURIBILITY:10000CYCLES
3. OPERATING TEMPERATURE:-40℃~85℃

REV.	ECN	NO	OR DESCRIPTION	REVISED	DATE
D			修改焊盘尺寸	BROKEN	2022.09.17
E			焊盘位置往内缩0.5mm	BROKEN	2022.10.12
F			增加护套装配示意图	ZHARKO	2023.11.13

D	PCB	1	FR-4	T-051
C	SHELL	1	STAINLESS STEEL 0.30t	NI PLATING
B	CONTACT	10	COPPER ALLOY 0.15t	Gold flash On Contact Area Tin plated on Solder tail
A	HOUSING	1	THERMOPLASTIC U94-10	All over Nickel Plated.
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X :±0.5 X :±2°				
X.X :±0.3 X.X :±1°				
X.XX :±0.2				
TITLE: MINI USB 10P母座光板带PCB不锈钢壳10焊点				
PART NO.		1031003AP008		
DWG		ZHARKO		
CHKD		2023.11.23		
APVD				
SCALE 1:1		UNIT: mm		
CUSTOMER COPY		SIZE: A4		SHEET: 10F1
				REV: F