

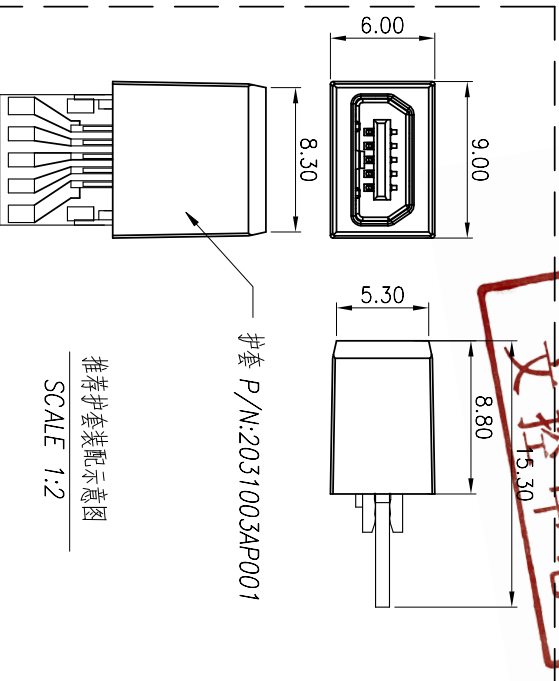
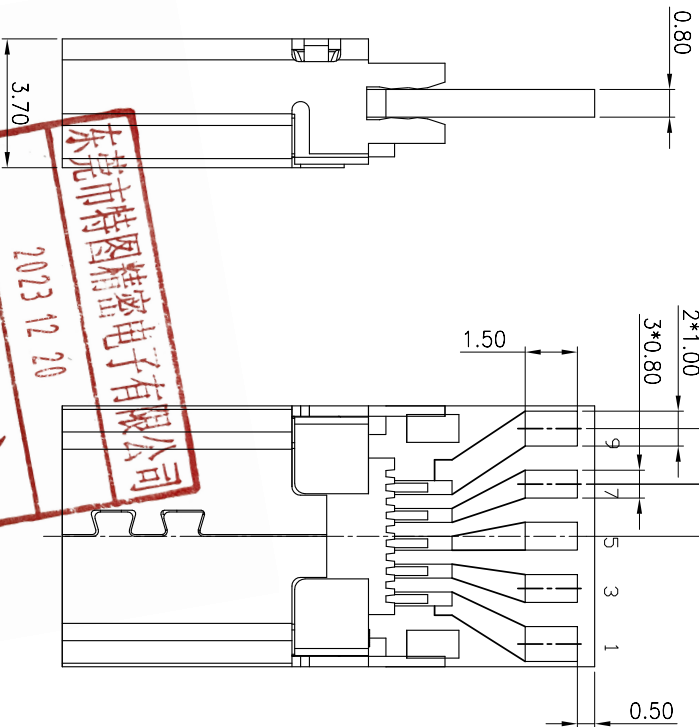
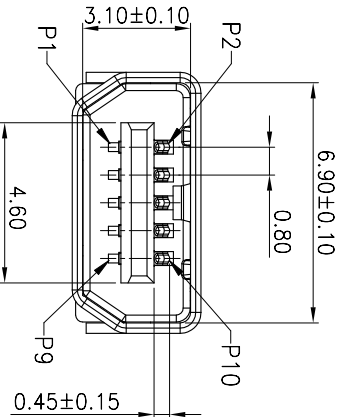


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

ROHS Compliant

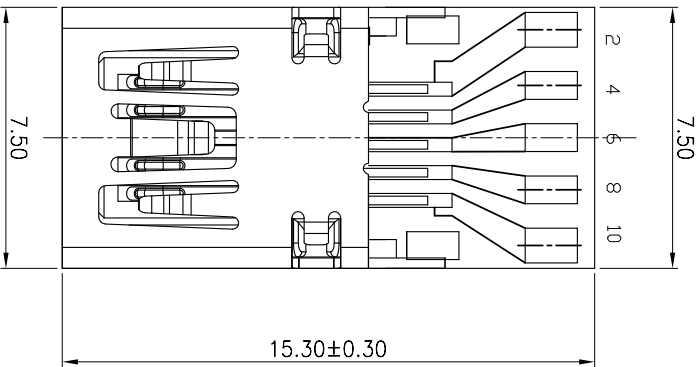

推荐护套装配示意图
SCALE 1:2

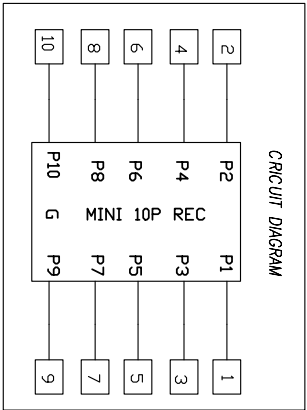

NOTE:

- ELECTRICAL CHARACTERISTICS
1-1. VOLTAGE RATING:30V AC
1-2. CURRENT RATING:2.0A
1-3. CONTACT RESISTANCE: 50 milliohms MAX.
1-4. INSULATION RESISTANCE: 100 Megohms MIN.
1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
- MECHANICAL CHARACTERISTICS
2-1. Mating FORCE: 35N Mox
2-2. Unmating FORCE: 7N Min(Initial)
2-3. DURABILITY:10000CYCLES
3. OPERATING TEMPERATURE:-40°C~85°C

REV.	ECN	NO	OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE		MKE	2021.01.11	
B	BROKEN		BROKEN	2021.04.14	
C	增加护套装配示意图		ZHARKO	2023.11.13	

D	PCB	1	FR-4	T-068
C	SHELL	1	STAINLESS STEEL 0.30t	NI PLATING
B	CONTACT	10	COPPER ALLOY 0.15t	Gold flash On Contact Area Tin plated on Solder tail All over Nickel Plated.
A	HOUSING	1	HIGH THERMOPLASTIC U94-10	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	±0.5	X	±2°	
X.X	±0.3	X.X	±1°	
X.XX	±0.2			
TITLE:				
MINI USB 10P母座夹板带PCB不锈钢壳10P母座-15.3				
PART NO. 1031003AP009				
DWG ZHARKO 2023.11.13				
CHKD				
APVD				
SCALE 1:1				
UNIT: mm				
CUSTOMER COPY				
SIZE: A4				
SHEET: 10F1				
REV: C				