

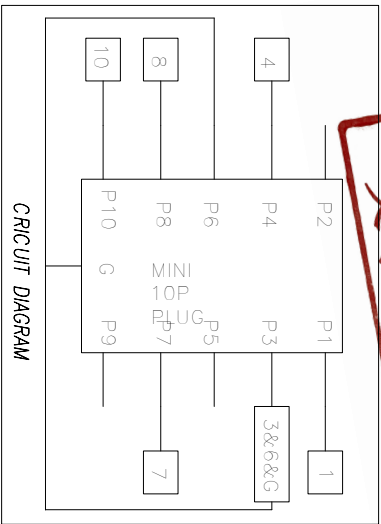


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

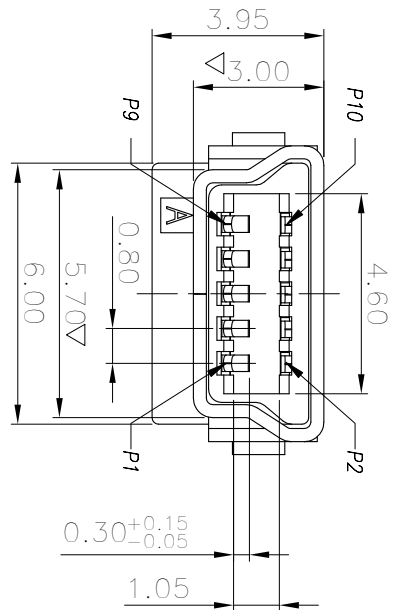

D	PCB	1	FR4-1	T-021
C	SHELL	1	SPEC 0.30t	NI PLATING
B	CONTACT	10	CS191 0.20t	Gold Flash On Contact Area Tin plated on Solder tail All over Nickel Plated.
A	HOUSING	1	LCP	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	±0.5	X	±2°	
X.X	±0.3	X.X	±1°	
X.XX	±0.2			

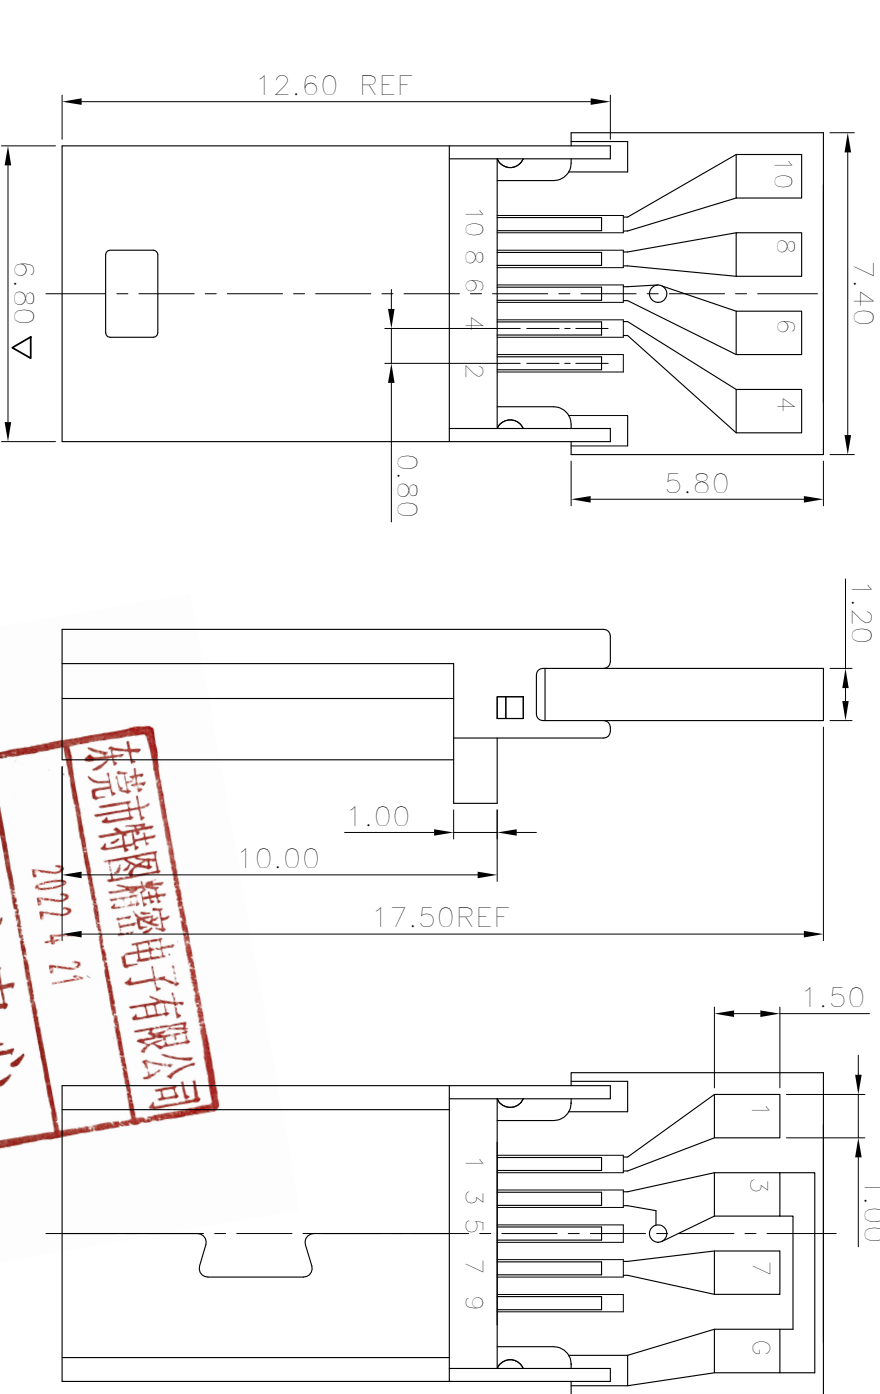

CUSTOMER COPY SIZE: A4 SHEET: 10F1 REV: A

REV.	ECN NO	OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	MKE	2011.09.25	
B	MODIFY	BROKEN	2015.02.01	

NOTE:

- ELECTRICAL CHARACTERISTICS
 - VOLTAGE RATING:30V AC
 - CURRENT RATING:2.0A
 - CONTACT RESISTANCE: 50 milliohms MAX.
 - INSULATION RESISTANCE: 100 Megohms MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
- MECHANICAL CHARACTERISTICS
 - MATING&UNMATING FORCE: 0.7kgf~3.5kgf
 - DURIBILITY:10000CYCLES
 - SALT SPRAY: 24H
 - OPERATING TEMPERATURE:-40℃~85℃
 - RoHS 2002/95/EC COMPLIANT.
 - CRITICAL DIMENSIONS : ▽