
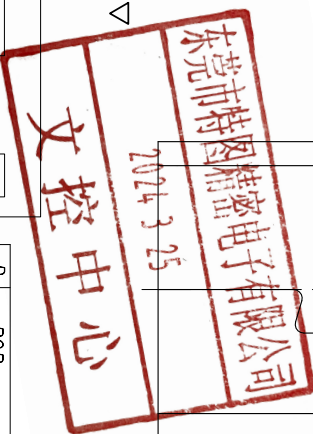
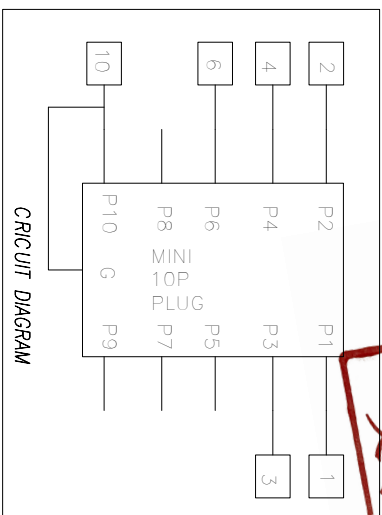


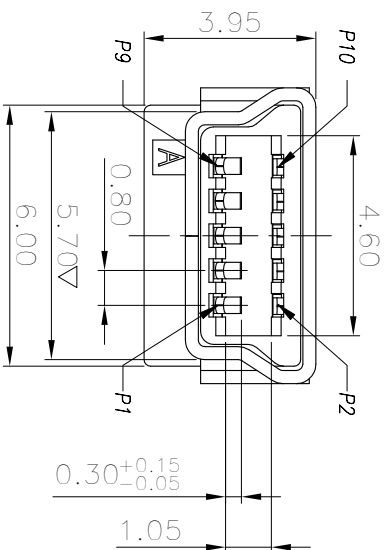

1. ELECTRICAL CHARACTERISTICS
 - 1-1. VOLTAGE RATING: 30V AC
 - 1-2. CURRENT RATING: 2.0A
 - 1-3. CONTACT RESISTANCE: 50 milliohms MAX.
 - 1-4. INSULATION RESISTANCE: 100 Megohms MIN.
 - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC

此小孔是通孔，用万用表检验铁壳与10p导通为OK，不导通则为NG

2. MECHANICAL CHARACTERISTICS
- 2-1. MATING&UNMATING FORCE: 1.0kgf~2.0kgf
- 2-2. DURIBILITY:10000CYCLES
3. SALT SPRAY: 24H
4. OPERATING TEMPERATURE:-40℃~85℃
5. RoHS 2011/65/EU COMPLIANT.

ITEM	P/N	SHELL NOTE
1	1031002GR051	BRASS, NI PLATE
2	1031002GR251	SPCC, NI PLATE

D	PCB	1	FR4-1	T-025
C	SHELL	1	BRASS 0.30t	NI PLATING
B	CONTACT	10	C5191 0.20t	Gold Flash On Contact Area Tin plated on Solder tail All over Nickel Plated .
A	HOUSING	1	LCP	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: MINI 10P 公头 绿PCB铜壳=17.0 (6点), 2、3、4、6、10-(G)		
DECIMALS:	ANGLES:	PART NO.	10J31002GRX51	
X :±0.5	X :±2°	DWN	ZHARKO	
X.X :±0.3	X.X :±1°	CHXD		
X.XX :±0.2		APVD		
		SCALE 1 : 1	UNIT: mm	

SIZE: A4	SHEET: 10F1	REV: A
----------	-------------	--------