
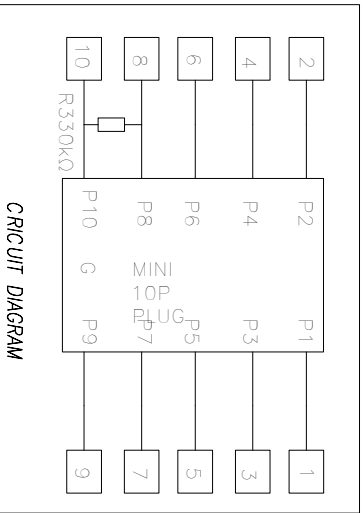
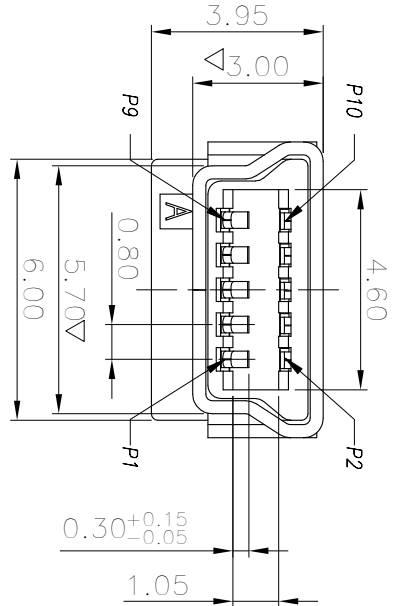
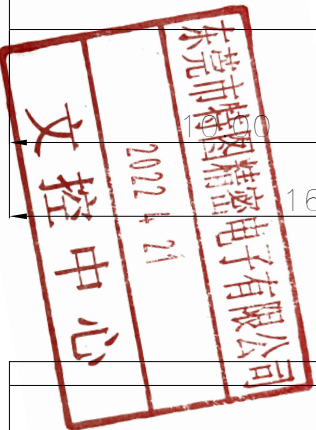
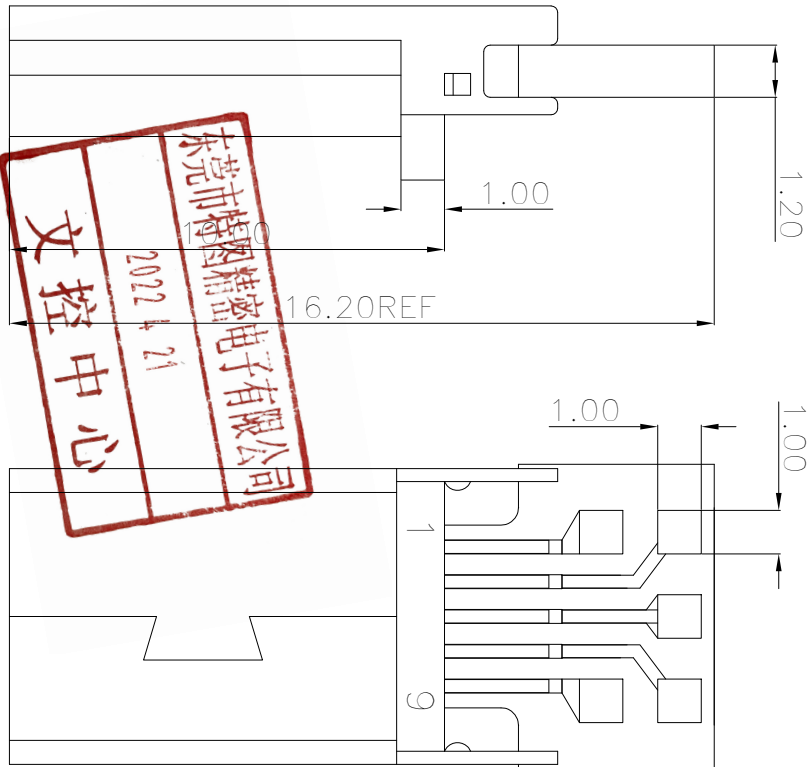


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.

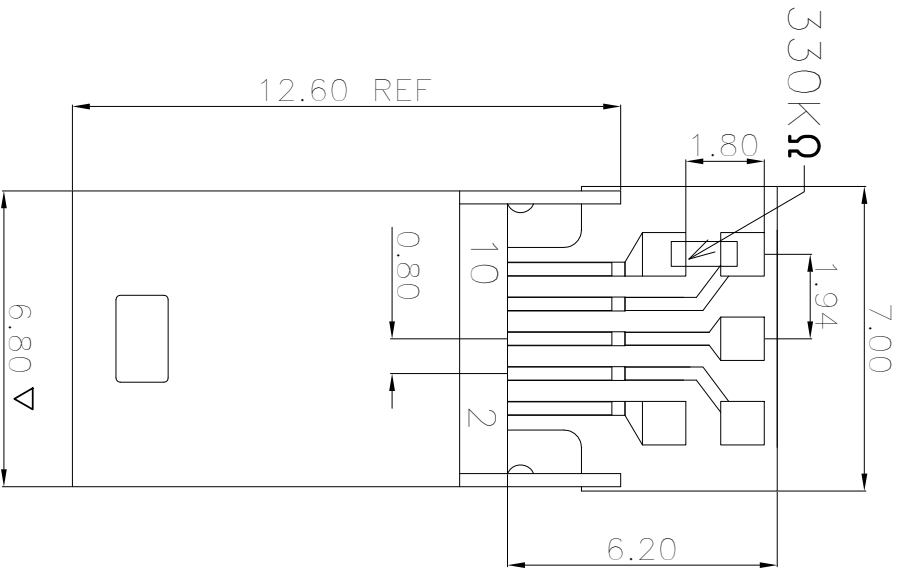

REV.	ECN	NO OR DESCRIPTION	REVISED	DATE
A		PRODUCT RELEASE	MIKE	2013.03.27

NOTE:

1. ELECTRICAL CHARACTERISTICS

1-1. VOLTAGE RATING:30V AC

1-2. CURRENT RATING:2.0A

1-3. CONTACT RESISTANCE: 50 milliohms MAX.

1-4. INSULATION RESISTANCE: 100 Megohms MIN.

1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC

FOR 1 MINUTE.

2. MECHANICAL CHARACTERISTICS

2-1. MATING&UNMATING FORCE: 0.7kgf~3.5kgf

2-2. DURIBILITY:10000CYCLES

3. SALT SPRAY: 24H

4. OPERATING TEMPERATURE:-40C~85C

5. ROHS 2002/95/EC COMPLAINT.

6. CRITICAL DIMENSIONS : ∇

D	PCB	1	FR4-1	
C	SHELL	1	SPEC 0.30t	
B	CONTACT	10	CS191 0.20t	
A	HOUSING	1	LCP	
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X :±0.5 X :±2°				
X.X :±0.3 X.X :±1°				
X.XX :±0.2				
TITLE: MINI 10P公头绿PCB板壳L=16.2 (10点) 电阻330k				
PART NO.		10310026R025		
DWG		MIKE		
CHKD		2013.03.27		
APVD				
SCALE 1:1		UNIT: mm		
CUSTOMER COPY		SIZE: A4		REV: A
		SHEET: 10F1		

