

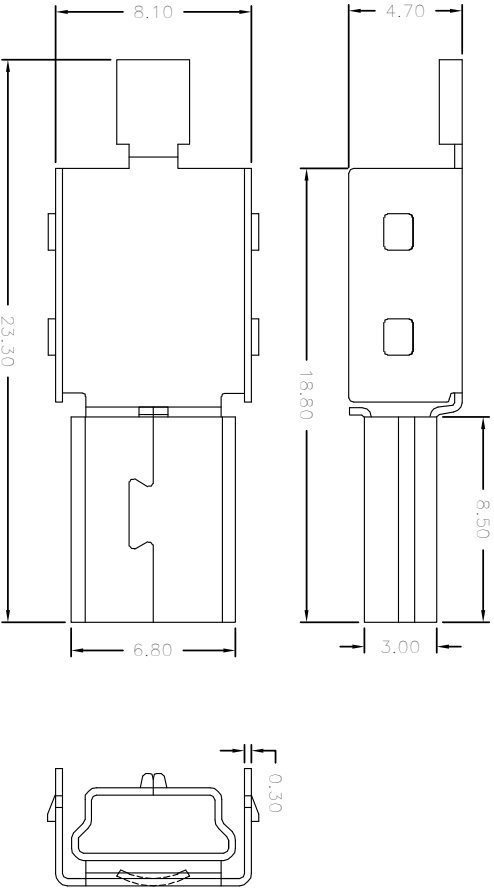


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TETULL PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TETULL LTD.


MINI USB 10P/M前壳

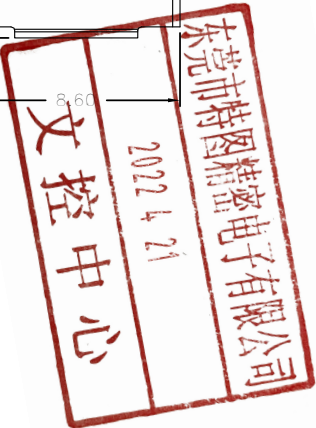

MINI USB 10P/M后壳

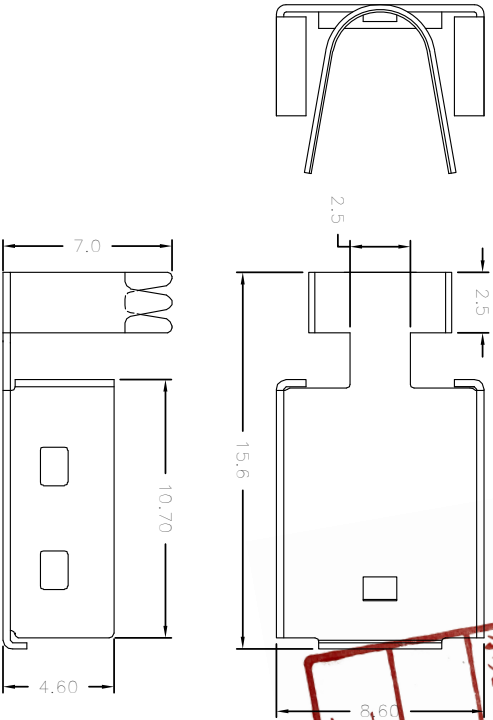

MINI USB 10P/M半成品

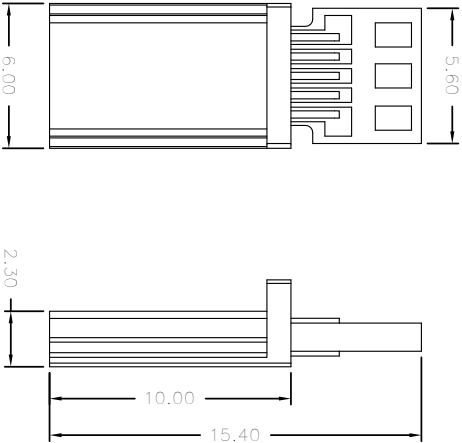

NOTE:

- 1. ELECTRICAL CHARACTERISTICS
 - 1-1. VOLTAGE RATING: 30V AC
 - 1-2. CURRENT RATING: 20A
 - 1-3. CONTACT RESISTANCE: 80 milliohms MAX.
 - 1-4. INSULATION RESISTANCE: 100 Megohms MIN.
 - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
- 2. MECHANICAL CHARACTERISTICS
 - 2-1. MATING UNMATING FORCE: 10kgf~20kgf
 - 2-2. DURABILITY: 10000 CYCLES
- 3. SALT SPRAY: 24H
- 4. OPERATING TEMPERATURE: -40°C~85°C
- 5. RoHS 2002/95/EC COMPLIANT.

D	PCB	1	FR4-1	
C	SHELL	1	SPEC 0.3t	NI plated
B	CONTACT	10	CS191 0.2t	Gold flash On Contact Area Tin plated on Solder tail All over Nickel Plated.
A	HOUSING	1	LCP	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:	ANGLES:			
X : ±0.5	X : ±2°			
X.X : ±0.3	X.X : ±1°			
X.XX : ±0.2				
TITLE: MINI 10P公头绿PCB铁壳L-15.4 (10点)小板三件套		PART NO.	1031002GR055	
DWG		MIKE	2017.03.08	
CHKD				
APVD				
SCALE 1:1		UNIT: mm		
CUSTOMER COPY		SIZE: A4	SHEET: 10F1	REV: A