
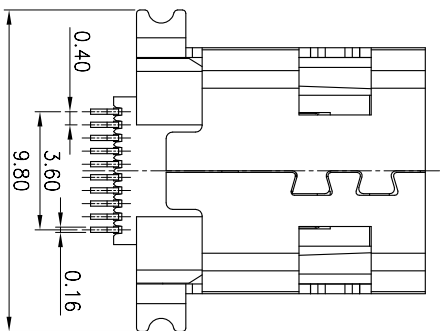

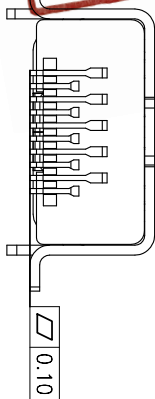


RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

CONTACT PROFILE

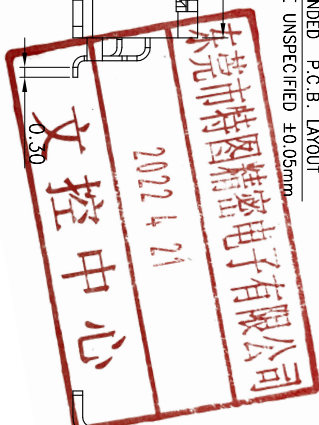

2. MECHANICAL CHARACTERISTICS
- 2-1. Mating FORCE: 35N Max
- 2-2. Umating FORCE: 7N Min(initial)
- 2-3. DURABILITY: 10000 CYCLES
3. OPERATING TEMPERATURE: -40°C~85°C
4. MPQ : 800PCS/REEL.

C	SHIELD	1	SPCC 0.30T	Ni&Tin PLATED
B	TERMINAL	10	COPPER ALLOY 0.15T	Gold Flash On Contact Area Tin plated on Solder tail All over Nickel Plated .
A	HOUSING	1	TERMOPLASTIC UL94-V0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: MINI USB 10P母座前插后贴无注		
DECIMALS:	ANGLES:	PART NO. 1031001IGR001		
X :±0.5	X :±2°	DWN	JAMES	2019.09.10
X.X :±0.3	X.X :±1°	CHND		
X.XX :±0.2		APVD		
		SCALE 1:1		
CUSTOMER COPY		SIZE: A4	UNIT: mm	
		SHEET: 10/71	REV: B	

TITLE:
MINI USB 10P母座前插后贴无柱

PART NO.	1031001GR001	
DWN	JAMES	2019.09.10

CHKD		
ADVD		

SCALE 1:1	1/16" = 1"	
-----------	------------	--

SIZE: A4	SHEET: 10F1	REV: B
----------	-------------	--------