



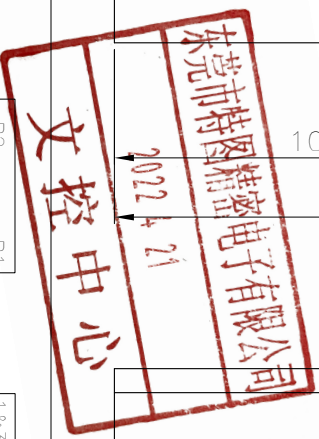

NOTE:

1. ELECTRICAL CHARACTERISTICS
 - 1-1. VOLTAGE RATING:30V AC
 - 1-2. CURRENT RATING:2.0A
 - 1-3. CONTACT RESISTANCE: 50 milliohms MAX.
 - 1-4. INSULATION RESISTANCE: 100 Megohms MIN.
 - 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
2. MECHANICAL CHARACTERISTICS
 - 2-1. MATING&UNMATING FORCE: 0.7kgf~3.5kgf
 - 2-2. DURABILITY:10000CYCLES
 3. SALT SPRAY: 24H
 4. OPERATING TEMPERATURE:-40℃~85℃
 5. RoHS 2002/95/EC COMPLIANT.
 6. CRITICAL DIMENSIONS : ▽

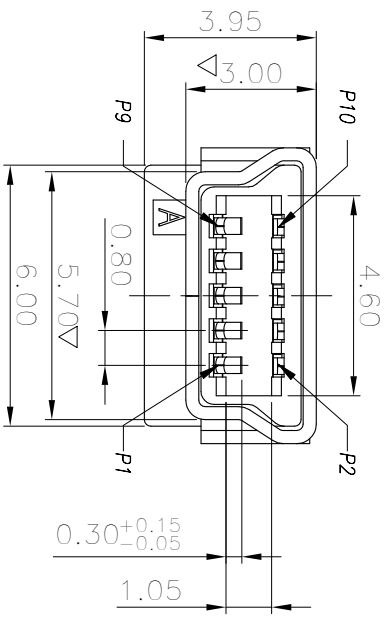